



# sitop



Power supplies  
SITOP power  
LOGO!Power

**SIEMENS**

## Related catalogs

### System Cabling SIMATIC TOP connect

KT 10.2

Order No.:  
E86060-K2410-A201-A3-7600



### Stromversorgungen SITOP power, LOGO!Power, SIDAC-S <sup>1)</sup>

PD 20

Order No.:  
E86060-K2802-A101-A1



### Low Voltage

LV 10

Order No.:  
E86060-K1002-A101-A4-7600



### SIMATIC Products for Totally Integrated Automation and Micro Automation

ST 70

Order No.:  
E86060-K4670-A111-A9-7600



### Industrial Communication

IK PI

Order No.:  
E86060-K6710-A101-B4-7600



### SINUMERIK & SIMODRIVE Automation Systems for Machine Tools

NC 60

Order No.:  
E86060-K4460-A101-B1-7600



### PC-based Automation

Order No.:  
E86060-K4670-B111-B2-7600



### Training for Information and Industrial Solutions <sup>1)</sup>

ITC

Order No.:  
Paper: E86060-K6850-A101-B3  
CD: E86060-D6850-A100-B7-7400



### The offline Mall of Automation and Drives

CA 01

Order No.:  
CD: E86060-D4001-A110-C3-7600



### A&D Mall

Internet:  
[www.siemens.com/automation/mall](http://www.siemens.com/automation/mall)



1) Available in German only.

## Trademarks

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

# SITOP

## Power supplies SITOP power LOGO!Power

Catalog KT 10.1 · 2004

Supersedes:  
Catalog KT 10.1 · 2002


The products contained in this catalog  
also appear in CD-ROM catalog CA 01  
Order No.:  
E86060-D4001-A110-C3-7600

Please contact your local Siemens  
representative.

© Siemens AG 2004



*The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with DIN EN ISO 9001 (Certified Registration No. 1108). The certificate is recognized by all IQNet countries.*



# SIEMENS

<b>Introduction</b>	Overview of product families, Selection guide	<b>1</b>
<b>SITOP power, Standard 24 V</b>	Single-phase, Output currents up to 2 A	<b>2</b>
	Single-phase, Output currents 2.5 to 4 A	<b>3</b>
	Single-phase and two-phase, Output current 5 A	<b>4</b>
	Single-phase and two-phase, Output current 10 A	<b>5</b>
	Single-phase and two-phase, Output currents 20 and 40 A	<b>6</b>
	Three-phase, Output currents 5 to 40 A	<b>7</b>
	Additional components	<b>8</b>
	Uninterruptible power supplies	<b>9</b>
<b>SITOP power</b>	Alternative voltages	<b>10</b>
<b>SITOP power</b>	AS interface power supplies	<b>11</b>
<b>SITOP power</b>	Customized	<b>12</b>
<b>LOGO!Power</b>		<b>13</b>
<b>Technical information and configuration</b>		<b>14</b>
<b>Dimension drawings</b>		<b>15</b>
<b>Appendix</b>	Contact persons Indexes	<b>16</b>

## Welcome to Automation and Drives


We would like to welcome you to Automation and Drives and our comprehensive range of products, systems, solutions and services for production and process automation and building technology worldwide.

With Totally Integrated Automation and Totally Integrated Power, we deliver solution platforms based on standards that offer you a considerable savings potential.

Discover the world of our technology now. If you need more detailed information, please contact one of your regional Siemens partners.



They will be glad to assist you.



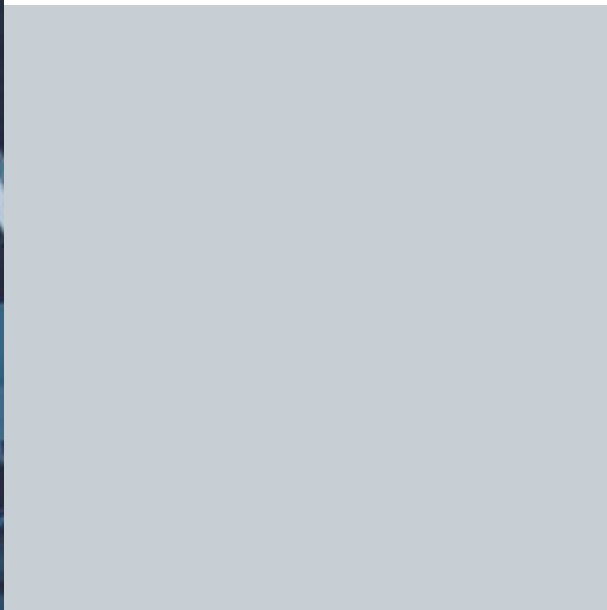


# Totally Integrated Automation – innovations for more productivity

With the launch of Totally Integrated Automation, we were the first ones on the market to consistently implement the trend from equipment to an integrated automation solution, and have continuously improved the system ever since. Whether your industry is process- and production-oriented or a hybrid, Totally Integrated Automation is a unique "common solution" platform that covers all the sectors. Totally Integrated Automation is an integrated platform for the entire production line - from receiving to technical processing

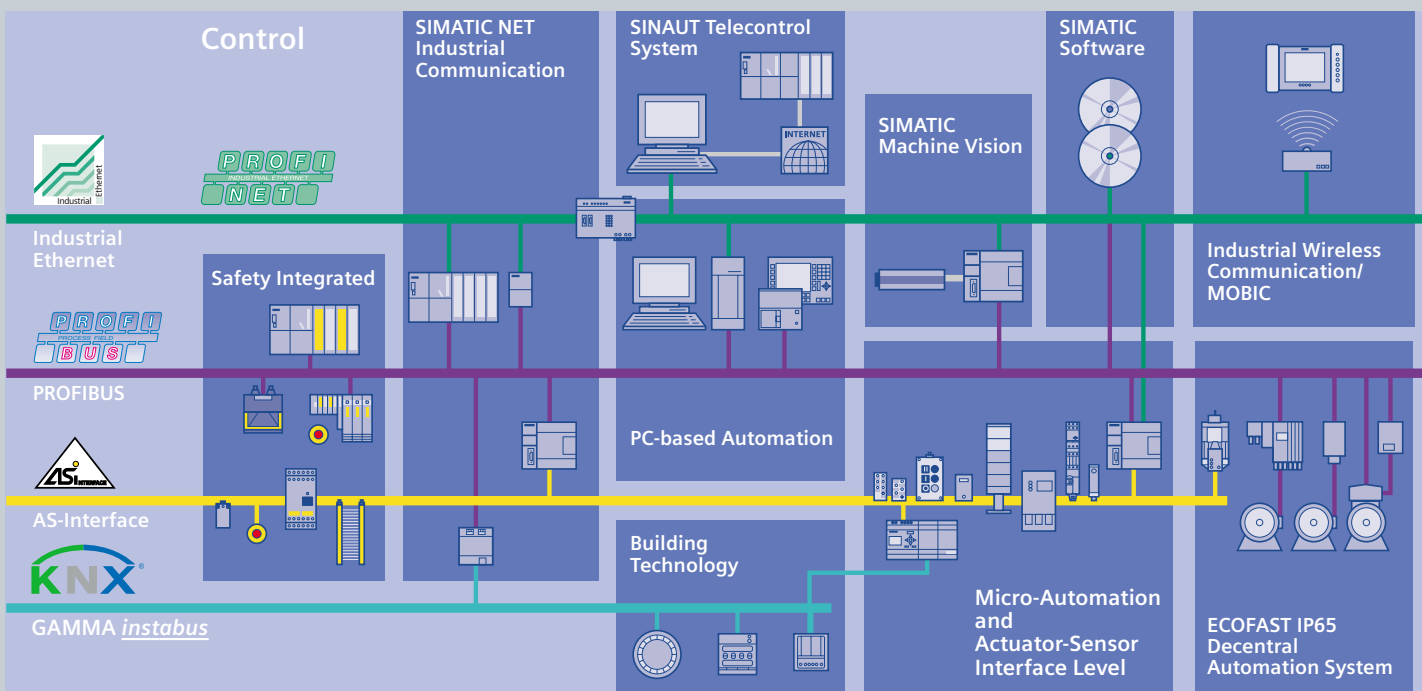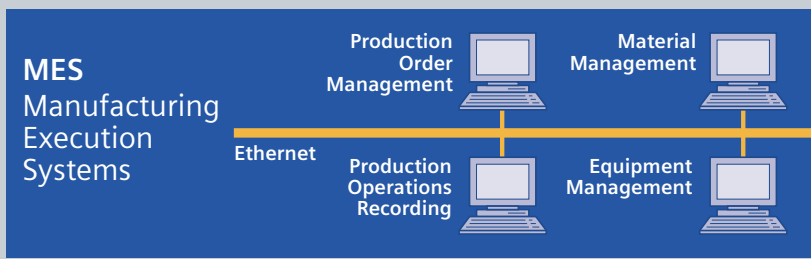

and production areas to shipping. Thanks to the system-oriented engineering environment, integrated, open communications as well as intelligent diagnostics options, your plant now benefits in every phase of the life cycle.

In fact, to this day we are the only company worldwide that can offer a control system based on an integrated platform for both the production and process industry.

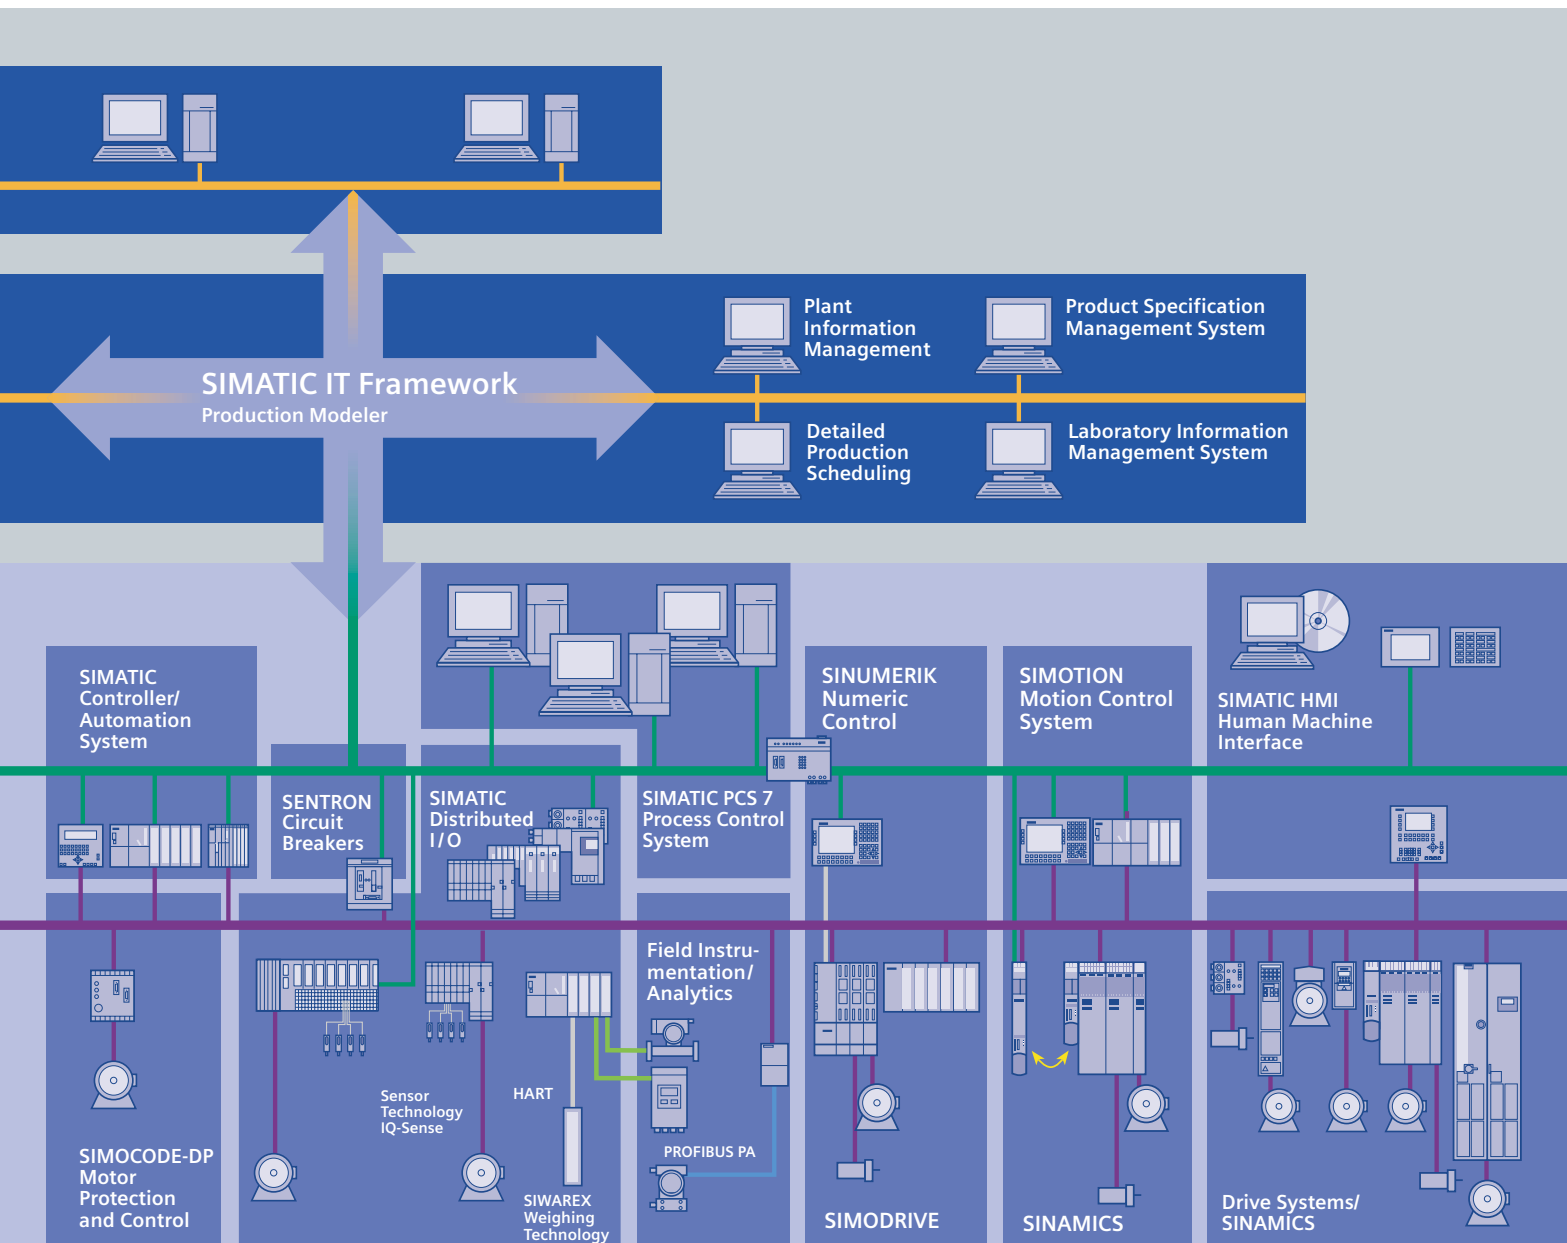

# SITOP power Introduction

## Overview of product families

### SITOP modular

The innovative SITOP modular power supplies feature a completely new concept. The highlight is the modular design comprising a basic unit which can be supplemented by add-on modules with further functions. The modularity has no competition with respect to flexibility, simple handling and price/performance ratio.

#### The basic units

Compact and rugged basic units for 1-, 2- or 3-phase connection and with output currents from 5 A to 40 A are the basis of the stabilized 24 V supply. The 5 A and 10 A power supply units are unique, and can be connected to almost any network throughout the world thanks to their ultra-wide input range. Each basic unit can be fitted on a DIN rail and already has a comprehensive scope of functions.

- 5 A and 10 A devices with ultra-wide input range for 1- and 2-phase operation
- 20 A and 40 A devices for 1- or 3-phase operation
- Adjustable output voltage up to 28.8 V for compensation of voltage drops
- 3 LEDs for detailed signalling of the operating status
- Power boost up to three times the rated current
- Selectable short-circuit response: constant current or latching shutdown
- Selectable output characteristic for parallel operation



#### The add-on modules

The functionality of the basic units can be expanded using add-on modules. The power supply is optimally integrated into the overall system using the signalling module. Immediate response to various operating statuses is possible and potential damage can be avoided. The buffer module provides effective protection against brief power failures which could lead to a plant standstill, loss of data or even machine damage if the 24 V side is not buffered. A redundancy module can also be used to provide redundant power supply. Thus the 24 V supply is guaranteed even in the worst case when a faulty power supply unit would affect the unit connected in parallel.

#### The SITOP select diagnosis module

The diagnosis module is the optimum expansion for all 24 V power supplies in order to divide and monitor the load current among several branch circuits. An overload or short-circuit in a feeder is reliably detected and selectively switched-off. Total failures of plants can be prevented because the 24 V supply for the other loads is maintained. Detailed signalling permits fast fault locating, and thus the minimizing of downtimes.





### SITOP DC UPS

The DC UPS modules provide optimum protection against longer power failures. DC UPS modules and battery modules expand SITOP power supply units with 24 V output voltage into uninterruptible power supplies with a rated output current up to 40 A. The transition from power supply mode to buffered mode is absolutely interruption-free. The DC UPS modules are provided as standard with all required protection and monitoring functions, thus providing high availability. The integral battery management function guarantees a long service life for the maintenance-free battery modules. Status messages concerning the operational readiness, battery status and battery lines are signaled by LEDs and floating contacts. The compact 6 A and 15 A DC UPS modules can also communicate via an interface, thus permitting simple integration into PC-based systems.

### Tried and tested

The SITOP range of power supply units has proven its reliability for many years already. The units offer graded performances with output currents from 2 A to 20 A and from 10 A to 40 A for single-phase and three-phase incoming supplies respectively. Thanks to the simple handling and numerous certifications, the 24 V power supply units are also suitable for export-oriented use in all standard automation engineering applications. And should it be the case that the power supply conditions are unreliable in a global application, the proven SITOP power supplies can of course also be combined with the DC UPS modules.

### The facets

The SITOP power supply units also cover individual power supply requirements - whether standard industrial applications, extreme ambient conditions, or unusual output voltages. The SITOP variants include some true all-rounders:

**SITOP power 0.5:** the mini devices with a width of only 22.5 mm are the narrowest in the SITOP family and are therefore particularly suitable for supplying low-voltage switchgear.

**SITOP power flexi:** unlimited variety thanks to a variable output. The innovative circuit concept permits flexible setting of the output voltage between 3 V and 52 V. Special voltages can therefore also be covered by a standard device.

**SITOP power dual:** the electronics supply for the switchgear cabinet. The DIN rail device is industry-compatible and has two 15 V outputs. For example, for electronic loads to be supplied with  $\pm 15$  V.

**SITOP power 24 V/2.5 A, 4 A and 10 A:** the devices with universal input can be connected to 1-phase AC voltage networks as well as to DC voltage networks.

**SITOP power 24 V/20 A:** the 2-phase primary switched-mode regulator with 20 A rated output current is predestined for industrial networks with high AC voltages. The special wide-range input allows connection to 3-phase networks with rated voltages between 500 V and 600 V.

**SITOP power AS-Interface:** 2 primary switched-mode regulators are available especially for powering the actuator/sensor interface: a 2.4 A version with 24 V DC input and IP65 degree of protection, and a 7 A version with wide-range input for AC and DC voltages.

# The facets



# SITOP power Introduction

## Overview of product families

# SIMATIC design

### SITOP in SIMATIC design

The SITOP power supply units were developed with a design based on the SIMATIC automation systems. However, their special features mean that they can also be optimally used in many other applications.

**S7-200 design: 24 V/3.5 A.** The flat power supply unit with the design of the micro PLC is also particularly suitable for applications with a small overall height and a small switchgear cabinet depth.

**S7-300 design: 24 V/2 A, 5 A and 10 A.** Designed as series-connected power supply units for the S7-300 CPUs, they can be simply snapped onto the S7 rail and connected to the CPU by means of a connecting comb. The 2 A and 5 A devices are also available as outdoor versions which are unaffected even by temperatures from -25 °C to +70 °C or increased shock and vibration load.

**ET 200B design: 24 V/5 A and 10 A.** The devices with a flat design are particularly suitable when only limited mounting depths are available. They find sufficient space even in covered machine racks or pivoted frames.

**ET 200X design: 24 V/10 A.** The 10 A power supply unit with IP65 degree of protection is suitable for the most rugged industrial applications. Permitting any mounting position, the power supply unit for distributed I/Os can handle ambient temperatures from -25 °C to +55 °C.



### LOGO!Power

The mini power supply units are available in two performance classes for output voltages of 5 V, 12 V and 15 V, and in three performance classes for 24 V. Their flat, cascaded profile even permits installation in small distribution boards. The primary switched-mode regulators have been completely innovated and now require even less space for mounting, but with increased functionality. For example, the new function "Constant current in event of overload" even permits the connection of difficult loads. Wide-range input, wide temperature range and many certifications mean that the LOGO! power supply is a universal device for use in numerous applications.

# LOGO!Power



## Selection guide

In order to assist you in finding the right stabilized power supply for each application as quickly as possible, we have assembled the following table as an overview listing all power supplies con-

tained in this catalog sorted according to input voltage, output voltage and output current.

### Selection guide

Output voltage	Output current	Order No.	Alternating voltage			Direct voltage		
			120 to 230 V AC	500 to 600 V two-phase AC	400 to 500 V three-phase AC	24 V DC	24 to 220 V DC	120 to 230 V DC
5 V DC	3 A	6EP1 311-1SH02	page 13/2					
	6.3 A	6EP1 311-1SH12	page 13/2					
12 V DC	1.9 A	6EP1 321-1SH02	page 13/4					
	4.5 A	6EP1 322-1SH02	page 13/4					
15 V DC	1.9 A	6EP1 351-1SH02	page 13/6					
	4 A	6EP1 352-1SH02	page 13/6					
	2x3.5 A	6EP1 353-0AA00	page 10/2					
24 V DC	0.375 A	6EP1 731-2BA00	page 2/2					
	0.5 A	6EP1 331-2BA10	page 2/2					
	1.3 A	6EP1 331-1SH02	page 13/8					
	2 A	6EP1 331-2BA00	page 2/2					
		6EP1 331-1SL11	page 2/3					
		6ES7 307-1BA00-0AA0	page 2/3					
		6ES7 305-1BA80-0AA0	page 2/3					
	2.5 A	6EP1 732-0AA00	page 2/3					
		6EP1 332-1SH12	page 3/2					
	2.5 A	6EP1 332-1SH42	page 13/8					
		6EP1 332-1SH31	page 3/2					
	3.5 A	6EP1 332-1SH22	page 3/2					
		6EP1 332-1SH51	page 13/8					
	5 A	6EP1 333-2BA00	page 4/2					
		6EP1 333-2AA00	page 4/2					
		6ES7 307-1EA80-0AA0	page 4/3					
		6ES7 307-1EA00-0AA0	page 4/3					
		6EP1 333-1AL12	page 4/3					
		6EP1 333-1SL11	page 4/3					
		6EP1 333-3BA00	page 4/2					
	10 A	6EP1 334-2BA00	page 5/2					
		6EP1 334-2AA00	page 5/2					
6EP1 334-2CA00		page 5/3						
6ES7 307-1KA01-0AA0		page 5/3						
6EP1 334-1SL12		page 5/3						
6EP1 334-1AL12		page 5/3						
6EP1 334-1SH01		page 5/3						
6EP1 434-2BA00		page 7/6						
6EP1 334-3BA00		page 5/2						
6EP1 434-2BA00		page 7/6						
6EP1 436-3BA00		page 7/3						
20 A	6EP1 336-3BA00	page 6/2						
	6EP1 336-2BA00	page 6/3						
	6EP1 536-2AA00	page 6/3						
20 A	6EP1 436-2BA00	page 7/6						
	6EP1 436-3BA00	page 7/3						
30 A	6EP1 437-2BA00	page 7/7						
40 A	6EP1 337-3BA00	page 6/2						
	6EP1 437-3BA00	page 7/3						
	6EP1 437-2BA10	page 7/7						

Continued on page 1/10.

## Selection guide

## Selection guide (continued)

Output voltage	Output current	Order No.	Alternating voltage			Direct voltage		
			120 to 230 V AC	500 to 600 V two-phase AC	400 to 500 V three-phase AC	24 V DC	24 to 220 V DC	120 to 230 V DC
24 V DC UPS	6 A	6EP1 931-2DC21						page 9/7
		6EP1 931-2DC31						page 9/7
		6EP1 931-2DC41						page 9/7
	15 A	6EP1 931-2EC21						page 9/9
		6EP1 931-2EC31						page 9/9
		6EP1 931-2EC41						page 9/9
	40 A	6EP1 931-2FC01						page 9/13
		1.2 Ah	6EP1 935-6MC01					page 9/14
		2.5 Ah	6EP1 935-6MD31					page 9/15
		3.2 Ah	6EP1 935-6MD11					page 9/16
		7 Ah	6EP1 935-6ME21					page 9/17
		12 Ah	6EP1 935-6MF01					page 9/18
	48 V DC	20 A	6EP1 457-3BA00					page 10/2
3-52 V DC	10 A/120 W	6EP1 353-2BA00	page 10/2					
30 V DC	2.4 A	6EP1 632-1AL01					page 11/2	
AS-Interface	7 A	6EP1 354-1AL01	page 11/2					
<b>SITOP power 24 V, Additional components</b>								
Signalling module		6EP1 961-3BA10						page 8/2
Buffer module	40 A	6EP1 961-3BA00						page 8/2
Redundancy module	20 A	6EP1 961-3BA20						page 8/2
Diagnosis module	4x10 A	6EP1 961-2BA00						page 8/4

# SITOP power · Standard 24 V Single-phase

# 2



2/2  
2/2  
2/3  
2/3  
2/3

## Output currents up to 2 A

The smallest  
The proven type  
The DC/DC converter  
The S7-300 type  
The outdoor variant



# SITOP power · Standard 24 V

## Single-phase

2

Output currents up to 2 A

### Overview

### The smallest



### The proven type



### Application

The optimum power supply units for automation solutions in the lower performance range; with wide-range input for AC or DC voltages; thanks to their compact and narrow design, they are particularly suitable for solutions where limited space is available and in conjunction with low-voltage switchgear.

The tried and tested power supply unit with selectable input voltage range for supplying all standard applications in automation engineering.

### Technical specifications

Power supply, type	0.5 A	0.375 A	2 A
Order No.	6EP1 331-2BA10	6EP1 731-2BA00	6EP1 331-2BA00
Input	Single-phase AC	DC voltage	Single-phase AC
Rated voltage $V_{in \text{ rated}}$	120 to 230 V AC wide-range input	48 to 220 V DC wide-range input	120/230 V AC Settable using wire jumper
Voltage range	93 to 264 V AC	30 to 264 V DC (30 to 187 V AC)	93 to 132 V/187 to 264 V AC
Overvoltage strength	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms	-	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms
Mains buffering at $I_{out \text{ rated}}$	> 10 ms at $V_{in} = 230 \text{ V}$	> 10 ms at $V_{in} = 220 \text{ V}$	> 10 ms at $V_{in} = 93/187 \text{ V}$
Rated line frequency; range	50/60 Hz, 47 to 63 Hz	-	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	0.22 to 0.13 A	0.03 to 0.06 A	0.9/0.6 A
Inrush current limitation (+25 °C)	< 23 A, typ. 1 ms	< 35 A, typ. 3 ms	< 14 A, typ. 3 ms
$I^2t$	0.3 A <sup>2</sup> s	1.2 A <sup>2</sup> s	< 0.3 A <sup>2</sup> s
Integrated line-side fuse	T 2 A/250 V (not accessible)	F 4 A/250 V (not accessible)	T 1.6 A/250 V (not accessible)
Recommended circuit-breaker (IEC 898) in mains supply line	From 3 A, Characteristic C	From 6 A, Characteristic C, DC-suitable	From 3 A, Characteristic C
Output	Stabilized, floating direct voltage	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	24 V DC	24 V DC	24 V DC
Total tolerance	± 3 %	± 3 %	± 3 %
• Stat. mains compensation	Approx. ± 0.2 %	Approx. ± 0.1 %	Approx. 0.1 %
• Stat. load compensation	Approx. ± 0.7 %	Approx. ± 0.1 %	Approx. 0.8 %
Residual ripple (clock frequency: approx. 50 kHz)	< 150 mV <sub>pp</sub> (typ. 50 mV <sub>pp</sub> )	< 150 mV <sub>pp</sub> (typ. 50 mV <sub>pp</sub> )	< 150 mV <sub>pp</sub>
Spikes (bandwidth: 20 MHz)	< 240 mV <sub>pp</sub> (typ. 150 mV <sub>pp</sub> )	< 240 mV <sub>pp</sub> (typ. 50 mV <sub>pp</sub> )	< 240 mV <sub>pp</sub>
Setting range	-	-	22.8 to 26.4 V
Status display	Green LED for 24 V O.K.	Green LED for 24 V O.K.	Green LED for 24 V O.K.
Power ON/OFF behavior	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	< 1.5 s/typ. 20 ms	< 2.5 s/typ. 90 ms	< 3 s/typ. 80 ms
Rated current $I_{out \text{ rated}}$	0.5 A	0.375 A	2 A
Current range	0 to 0.5 A	0 to 0.375 A	0 to 2 A
• Up to +45 °C	0 to 0.5 A	0 to 0.375 A	0 to 2 A
• Up to +60 °C	0 to 0.5 A (up to +70 °C)	0 to 0.375 A	0 to 2 A
Dyn. V/I with			
• Starting on short circuit	Approx. 0.6 A constant current	typ. 2.7 A for 200 ms	typ. 7 A for 300 ms
• Short-circuit in operation	Approx. 0.6 A constant current	Not permissible	Yes, 2
Parallel connection for increased output	Not permissible	Not permissible	Yes, 2

Continued on page 2/4.

# SITOP power · Standard 24 V Single-phase

Output currents up to 2 A

2

## The DC/DC converter



The DC/DC converter for supply from battery and DC networks, with a wide input voltage range from 38 V to 121 V DC.

## The S7-300 type



The proven power supply in the SIMATIC S7-300 design; alternatively with PS-CPU connecting comb and for snap-mounting on S7 busbar (Order No. 6ES7307-1BA00-0AA0) or without PS-CPU connecting comb for snap-mounting on DIN rail EN 500022-35x15 via mounting adapter (Order No. 6EP1 331-1SL11).

## The outdoor variant



The power supply unit for extreme environmental conditions with SIMATIC S7-300 design, can be snapped onto S7 rail; with PS-CPU connecting comb.

### 2 A

#### 6EP1 732-0AA00

DC voltage  
**48 to 110 V DC**  
wide-range input

38 to 121 V DC

> 5 ms at  $V_{in} = 48 V$   
-  
1.2 to 0.5 A  
< 33 A

T 2.5 A (not accessible)  
10 to 25 A, Characteristic B, or  
6 to 25 A, Characteristic C,  
DC-suitable

Stabilized, floating direct voltage  
**24 V DC**  
 $\pm 1 \%$   
Approx. 0.1 %  
Approx. 0.4 %

< 100 mV<sub>pp</sub>

< 300 mV<sub>pp</sub>

-  
Green LED for 24 V O.K.  
Overshoots of  $V_{out}$  when  
switching on max. 25 V

< 3 s/typ. 30 ms

### 2 A

0 to 2 A  
0 to 2 A (up to +70 °C)

Yes, 2

### 2 A

#### 6ES7307-1BA00-0AA0

Single-phase AC  
**120/230 V AC**  
Settable via selector switch on  
device  
85 to 132 V/170 to 264 V AC

$2.3 \times V_{in \text{ rated}}, 1.3 \text{ ms}$   
> 20 ms at  $V_{in} = 93/187 V$   
50/60 Hz, 47 to 63 Hz  
0.9/0.6 A  
< 20 A, < 3 ms

< 1.0 A<sup>2</sup>s  
T 1.6 A/250 V (not accessible)  
3 A, Characteristic C

Stabilized, floating direct voltage  
**24 V DC**  
 $\pm 3 \%$   
Approx. 0.1 %  
Approx. 0.2 %

< 150 mV<sub>pp</sub> (typ. < 20 mV<sub>pp</sub>)

< 240 mV<sub>pp</sub> (typ. < 150 mV<sub>pp</sub>)

-  
Green LED for 24 V O.K.  
No overshoot of  $V_{out}$   
(soft start)

< 3 s/typ. 60 ms

### 2 A

0 to 2 A  
0 to 2 A

typ. 10 A for 90 ms  
typ. 10 A for 90 ms  
Not permissible

### 2 A

#### 6EP1 331-1SL11

Single-phase AC  
**120/230 V AC**  
Settable via selector switch on  
device  
85 to 132 V/170 to 264 V AC

$2.3 \times V_{in \text{ rated}}, 1.3 \text{ ms}$   
> 20 ms at  $V_{in} = 93/187 V$   
50/60 Hz, 47 to 63 Hz  
0.9/0.6 A  
< 20 A, < 3 ms

< 1.0 A<sup>2</sup>s  
T 1.6 A/250 V (not accessible)  
3 A, Characteristic C

Stabilized, floating direct voltage  
**24 V DC**  
 $\pm 3 \%$   
Approx. 0.1 %  
Approx. 0.2 %

< 150 mV<sub>pp</sub> (typ. < 20 mV<sub>pp</sub>)

< 240 mV<sub>pp</sub> (typ. < 150 mV<sub>pp</sub>)

-  
Green LED for 24 V O.K.  
No overshoot of  $V_{out}$   
(soft start)

< 3 s/typ. 60 ms

### 2 A

0 to 2 A  
0 to 2 A

typ. 10 A for 90 ms  
typ. 10 A for 90 ms  
Not permissible

### 2 A

#### 6ES7 305-1BA80-0AA0 <sup>1)</sup>

DC voltage  
**24 to 110 V DC**  
wide-range input

16.8 to 138 V DC

154 V; 0.1 s  
> 10 ms at  $V_{in \text{ rated}}$   
-  
2.7 to 0.6 A (4 to 0.9 A)  
< 20 A, < 10 ms

< 5 A<sup>2</sup>s  
T 6.3 A/250 V (not accessible)  
From 10 A, Characteristic C,  
DC-suitable

Stabilized, floating direct voltage  
**24 V DC**  
 $\pm 3 \%$   
Approx. 0.2 %  
Approx. 0.4 %

< 150 mV<sub>pp</sub> (typ. < 30 mV<sub>pp</sub>)

< 240 mV<sub>pp</sub> (typ. < 150 mV<sub>pp</sub>)

-  
Green LED for 24 V O.K.  
No overshoot of  $V_{out}$   
(soft start)

< 3 s (typ. 7 ms)/typ. 5 ms

### 2 A (3 A at $V_{in} > 24 V$ )

0 to 2 A (3 A)  
0 to 2 A (3 A)

typ. 9 A for 270 ms  
typ. 9 A for 270 ms  
Yes, 2

Continued on page 2/5.

1) SIPLUS module 6AG1 307-1BA80-2AA0 for enhanced temperature range -25 to +60 °C and use under medium load (e.g. chlorine/sulfur atmosphere). Conformity with EN 50155 available soon (electrical equipment on track vehicles).

# SITOP power · Standard 24 V

## Single-phase

2

### Output currents up to 2 A

Power supply, type	0.5 A	0.375 A	2 A
<b>Order No.</b>	<b>6EP1 331-2BA10</b>	<b>6EP1 731-2BA00</b>	<b>6EP1 331-2BA00</b>
<b>Efficiency</b>			
Efficiency at $V_{out rated}$ , $I_{out rated}$	Approx. 74 %	Approx. 66 %	Approx. 82 %
Power loss at $V_{out rated}$ , $I_{out rated}$	Approx. 4.2 W	Approx. 4.6 W	Approx. 11 W
<b>Control</b>			
Dyn. mains compensation ( $V_{in rated} \pm 15\%$ )	Approx. $\pm 0.3\% V_{out}$	Approx. $\pm 0.3\% V_{out}$	Approx. $\pm 0.3\% V_{out}$
Dyn. load compensation ( $I_{out}: 50/100/50\%$ )	$\pm 0.7\% V_{out}$	$\pm 0.4\% V_{out}$	$\pm 2\% V_{out}$
<b>Settling time</b>			
• Load step from 50 to 100 %	typ. 1.5 ms	typ. 2 ms	typ. 0.5 ms
• Load step from 100 to 50 %	typ. 1.5 ms	typ. 2 ms	typ. 0.5 ms
<b>Protection and monitoring</b>			
Output overvoltage protection	Yes, acc. to EN 60950	Yes, acc. to EN 60950	Yes, acc. to EN 60950
Current limitation	0.55 to 0.65 A	0.41 to 0.49 A	typ. 2.2 to 2.6 A
Short-circuit protection	Stabilized current characteristic down to 0 V	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart
RMS sustained short-circuit current	< 0.65 A	< 0.9 A	< 4 A
Overload/short-circuit indicator	-	-	-
<b>Safety</b>			
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950
Protective class	Class I	Class I	Class I
Discharge current	< 3.5 mA	< 3.5 mA	< 3.5 mA (typ. 0.17 mA)
TÜV test	Yes	Yes	Yes; CB scheme
CE marking	Yes	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-95), File E143289; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273	Yes, cULus listed (UL 508, CSA 22.2 No. 14-95), File E143289; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273	Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)
FM approval	-	-	-
Appr. for use in marine vessels	-	-	-
Degree of protection (EN 60529)	IP20	IP20	IP20
<b>EMC</b>			
Interference emission	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	Not applicable	Not applicable	Not applicable
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>			
Ambient temperature range	-20 to +70 °C with natural convection	-20 to +70 °C with natural convection, derating above 60 °C	0 to +60 °C with natural convection
Transportation and storage temperature range	-40 to +70 °C	-40 to +70 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>			
Connections			
• Mains input L, N, PE (DC input: L+1, M1, PE)	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded
• Output L+	1 screw-type terminal for 0.5 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 0.5 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 0.5 to 2.5 mm <sup>2</sup>
• Output M	2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	22.5 x 80 x 91	22.5 x 80 x 91	50 x 125 x 125
Weight approx.	0.11 kg	0.14 kg	0.38 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5
<b>Accessories</b>	-	-	-

# SITOP power · Standard 24 V Single-phase

Output currents up to 2 A

2

2 A	2 A	2 A	2 A
6EP1 732-0AA00	6ES7307-1BA00-0AA0	6EP1 331-1SL11	6ES7 305-1BA80-0AA0
Approx. 84 % Approx. 9 W	Approx. 83 % Approx. 10 W	Approx. 83 % Approx. 10 W	Approx. 75 % Approx. 16 W (24 W)
± 0.3 % V <sub>out</sub> ± 0.8 % V <sub>out</sub>	± 0.3 % V <sub>out</sub> ± 0.8 % V <sub>out</sub>	± 0.3 % V <sub>out</sub> ± 0.8 % V <sub>out</sub>	± 0.3 % V <sub>out</sub> ± 2.5 % V <sub>out</sub>
< 5 ms (typ. 2.5 ms) < 5 ms (typ. 2.5 ms)	< 5 ms (typ. 2.5 ms) < 5 ms (typ. 2.5 ms)	< 5 ms (typ. 2.5 ms) < 5 ms (typ. 2.5 ms)	< 5 ms (typ. 2.5 ms) < 5 ms (typ. 2.5 ms)
Yes, suppressor diode at output  typ. 2.1 to 3 A	Additional control loop, shut-down at approx. 30 V, automatic restart 2.2 to 2.6 A	Additional control loop, shut-down at approx. 30 V, automatic restart 2.2 to 2.6 A	Additional control loop, shut-down at approx. 30 V, automatic restart 3.3 to 3.9 A
Electronic shutdown, automatic restart < 2 A -	Electronic shutdown, automatic restart < 4 A -	Electronic shutdown, automatic restart < 4 A -	Electronic shutdown, automatic restart < 2 A -
Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178, clearance and creepage distances > 5 mm
Class I < 3.5 mA (typ. 0.7 mA) -	Class I < 3.5 mA (typ. 0.7 mA) Yes	Class I < 3.5 mA (typ. 0.7 mA) Yes	Class I < 3.5 mA (typ. 0.7 mA) Yes
Yes Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E179336	Yes Yes, UL listed (UL 508), File E143289, CSA (CSA 22.2 No. 14-95)	Yes Yes, UL listed (UL 508), File E143289, CSA (CSA 22.2 No. 14-95)	Yes Yes, UL listed (UL 508), File E143289, CSA (CSA 22.2 No. 14-95)
- - IP20	Yes, Class I Div. 2 Group A, B, C, D T4 in the S7-300 system IP20	Yes, Class I Div. 2 Group A, B, C, D T4 in the S7-300 system IP20	- Yes, GL, LRS IP20
EN 55022 Class B Not applicable EN 61000-6-2	EN 55022 Class B Not applicable EN 61000-6-2	EN 55022 Class B Not applicable EN 61000-6-2	EN 55011 Class A Not applicable EN 61000-6-2
0 to +70 °C with natural convection -40 to +70 °C	0 to +60 °C with natural convection -40 to +85 °C	0 to +60 °C with natural convection -40 to +85 °C	-25 to +70 °C with natural convection -40 to +85 °C
Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K5 acc. to EN 60721, brief condensation permissible
One screw-type terminal each for 2 x 0.5 to 2.5/1.5 mm <sup>2</sup> single-core/finely stranded 1 screw-type terminal for 2 x 0.5 to 2.5 mm <sup>2</sup> 1 screw-type terminal for 2 x 0.5 to 2.5 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> 2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> 2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
80 x 135 x 120 0.5 kg Snap-mounting on DIN rail EN 50022-35x15	50 x 125 x 120 0.42 kg Snap-mounting on S7 rail	50 x 125 x 135 0.42 kg Snap-mounting on DIN rail EN 50022-35x15	80 x 125 x 120 0.75 kg Snap-mounting on S7 rail
-	Mounting adapter for DIN rail and PS-CPU connecting comb	Mounting adapter for DIN rail and PS-CPU connecting comb	Mounting adapter for DIN rail and PS-CPU connecting comb

# SITOP power · Standard 24 V

## Single-phase

2

Notes



# SITOP power · Standard 24 V Single-phase

# 3



3/2  
3/2

## Output currents 2.5 to 4 A

The universal types

The S7-200 type



# SITOP power · Standard 24 V Single-phase

Output currents 2.5 to 4 A

3

## Overview

### The universal types



### The S7-200 type



## Application

The universal power supply units for all supply networks, with a wide-range input from 93 V to 264 V AC and 110 V to 350 V DC for supply from all typical networks.

Power supply unit whose design and functionality are optimally matched to the SIMATIC S7-200 micro PLC; flat design, particularly suitable for low control cabinet depths.

## Technical specifications

Power supply, type	2.5 A	4 A	3.5 A
Order No.	<b>6EP1 332-1SH12</b>	<b>6EP1 332-1SH22</b>	<b>6EP1 332-1SH31</b>
Input	Single-phase AC or DC <b>120 to 230 V AC</b> wide-range input	Single-phase AC or DC <b>120 to 230 V AC</b> wide-range input	Single-phase AC <b>120/230 V AC</b> Settable using wire jumper
Rated voltage $V_{in\ rated}$	93 to 264 V AC or 110 to 350 V DC	93 to 264 V AC or 110 to 350 V DC	93 to 132 V/187 to 264 V AC
Voltage range			
Overvoltage strength	$2.3 \times V_{in\ rated}$ , 1.3 ms	$2.3 \times V_{in\ rated}$ , 1.3 ms	$2.3 \times V_{in\ rated}$ , 1.3 ms
Mains buffering at $I_{out\ rated}$	> 20 ms at $V_{in} = 120\text{ V}$ , > 80 ms (typ. 100 ms) at $V_{in} = 187\text{ V}$	> 20 ms at $V_{in} = 120\text{ V}$ , > 80 ms (typ. 100 ms) at $V_{in} = 187\text{ V}$	> 20 ms at $V_{in} = 187\text{ V}$
Rated line frequency; range	0/50/60 Hz, 47 to 63 Hz	0/50/60 Hz, 47 to 63 Hz	50/60 Hz, 47 to 63 Hz
Rated current $I_{in\ rated}$	1.3 to 0.7 A	1.8 to 1.1 A	1.65/0.95 A
Inrush current limitation (+25 °C)	< 33 A, < 3 ms ( $V_{in} = 230\text{ V}$ )	< 33 A, < 3 ms ( $V_{in} = 230\text{ V}$ )	< 33 A, < 3 ms ( $V_{in} = 230\text{ V}$ )
$I^2t$	< 3.5 A <sup>2</sup> s	< 3.5 A <sup>2</sup> s	< 1.0 A <sup>2</sup> s
Integrated line-side fuse	T 3.15 A (not accessible)	T 3.15 A (not accessible)	T 2.5 A/250 V (not accessible)
Recommended circuit-breaker (IEC 898) in mains supply line	Two-pole circuit-breaker from 10 A, Characteristic C or from 6 A, Characteristic D	Two-pole circuit-breaker from 10 A, Characteristic C or from 6 A, Characteristic D	Two-pole circuit-breaker from 10 A, Characteristic C or from 6 A, Characteristic D
Output	Stabilized, floating direct voltage <b>24 V DC</b>	Stabilized, floating direct voltage <b>24 V DC</b>	Stabilized, floating direct voltage <b>24 V DC</b>
Rated voltage $V_{out\ rated}$			
Total tolerance	± 1 %	± 1 %	± 5 % (typ. ± 2 %)
• Stat. mains compensation	Approx. ± 0.1 %	Approx. ± 0.1 %	Approx. ± 0.1 %
• Stat. load compensation	Approx. ± 0.2 %	Approx. ± 0.2 %	Approx. ± 0.2 %
Residual ripple (clock frequency: approx. 50 kHz)	< 50 mV <sub>pp</sub> (typ. 40 mV <sub>pp</sub> )	< 50 mV <sub>pp</sub> (typ. 40 mV <sub>pp</sub> )	< 150 mV <sub>pp</sub> (typ. 30 mV <sub>pp</sub> )
Spikes (bandwidth: 20 MHz)	< 100 mV <sub>pp</sub> (typ. 40 mV <sub>pp</sub> )	< 100 mV <sub>pp</sub> (typ. 40 mV <sub>pp</sub> )	< 240 mV <sub>pp</sub> (typ. 110 mV <sub>pp</sub> )
Setting range	-	-	-
Status display	Green LED for 24 V O.K.	Green LED for 24 V O.K.	-
Power ON/OFF behavior	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	< 0.6 s/typ. 20 ms	< 0.6 s/typ. 20 ms	< 1 s/typ. 80 ms
Rated current $I_{out\ rated}$	<b>2.5 A</b>	<b>4 A</b>	<b>3.5 A</b>
Current range			
• Up to +45 °C	0 to 2.5 A	0 to 4 A	0 to 3.5 A
• Up to +60 °C	0 to 2.5 A	0 to 2.5 A	0 to 3.5 A
Dyn. V/I with			
• Starting on short circuit	Approx. 2.8 A constant current	Approx. 4.4 A constant current	typ. 5 A for 100 ms
• Short-circuit in operation	Approx. 2.8 A constant current	Approx. 4.4 A constant current	typ. 5 A for 100 ms
Parallel connection for increased output	Yes, up to 10	Yes, up to 10	Yes, up to 5

Continued on page 3/3.

# SITOP power · Standard 24 V Single-phase

Output currents 2.5 to 4 A

3

Power supply, type	2.5 A	4 A	3.5 A
<b>Order No.</b>	<b>6EP1 332-1SH12</b>	<b>6EP1 332-1SH22</b>	<b>6EP1 332-1SH31</b>
<b>Efficiency</b>			
Efficiency at $V_{out rated}$ , $I_{out rated}$	Approx. 85 %	Approx. 85 %	Approx. 84 %
Power loss at $V_{out rated}$ , $I_{out rated}$	Approx. 11 W	Approx. 17 W	Approx. 16 W
<b>Control</b>			
Dyn. mains compensation, typ. ( $V_{in rated} \pm 15\%$ )	$\pm 0.3\% V_{out}$	$\pm 0.3\% V_{out}$	$\pm 0.3\% V_{out}$
Dyn. load compensation ( $I_{out}$ : 50/100/50 %)	typ. $\pm 0.5\% V_{out}$	typ. $\pm 0.5\% V_{out}$	$< \pm 10\% V_{out}$ (typ. $\pm 3\% V_{out}$ )
Settling time			
• Load step from 50 to 100 %	< 2 ms (typ. 1 ms)	< 2 ms (typ. 1 ms)	< 5 ms
• Load step from 100 to 50 %	< 2 ms (typ. 1 ms)	< 2 ms (typ. 1 ms)	< 5 ms
<b>Protection and monitoring</b>			
Output overvoltage protection			
Current limitation	2.8 A	4.4 A	3.8 A
Short-circuit protection	Stabilized current characteristic down to 0 V	Stabilized current characteristic down to 0 V	Stabilized current characteristic to typ. 14 V, electronic shut-down below that, automatic restart
RMS sustained short-circuit current	< 3 A	< 5 A	< 4 A
Overload/short-circuit indicator	-	-	-
<b>Safety</b>			
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950	Yes, SELV output voltage $V_{out}$ acc. to EN 60950	Yes, SELV output voltage $V_{out}$ acc. to EN 60950
Protective class	Class I	Class I	Class I
Discharge current	< 3.5 mA	< 3.5 mA	< 3.5 mA
TÜV test	Yes	Yes	Yes
CE marking	Yes	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289
FM approval	-	-	-
Appr. for use in marine vessels	-	-	-
Degree of protection (EN 60529)	IP20	IP20	IP20
<b>EMC</b>			
Interference emission	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	Not applicable	-	EN 61000-3-2
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>			
Ambient temperature range	0 to +60 °C with natural convection	0 to +50 °C with natural convection	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C	-25 to +85 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>			
Connections			
• Mains input L, N, PE	One screw-type terminal each for 2 x 0.5 to 1.5 mm <sup>2</sup> finely stranded, 2 x 0.5 to 2.5 mm <sup>2</sup> single-core	One screw-type terminal each for 2 x 0.5 to 1.5 mm <sup>2</sup> finely stranded, 2 x 0.5 to 2.5 mm <sup>2</sup> single-core	One screw-type terminal each for 0.5 to 1 mm <sup>2</sup> finely stranded, 0.5 to 1.5 mm <sup>2</sup> single-core
• Output L+	1 screw-type terminal for 2 x 0.5 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 2 x 0.5 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 0.5 to 1 mm <sup>2</sup>
• Output M	1 screw-type terminal for 2 x 0.5 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 2 x 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 1 mm <sup>2</sup>
Dimensions (W x H x D) in mm	80 x 135 x 120	80 x 135 x 120	160 x 80 x 62
Weight approx.	0.5 kg	0.5 kg	0.5 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15, wall mounting	Snap-mounting on DIN rail EN 50022-35x15, wall mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5, wall mounting
<b>Accessories</b>	-	-	Mounting bracket

# SITOP power · Standard 24 V

## Single-phase

Notes

3



# SITOP power · Standard 24 V Single-phase and two-phase

# 4



4/2  
4/2  
4/3  
4/3  
4/3

## Output current 5 A

SITOP modular  
The proven types  
The S7-300 type  
The outdoor variant  
The flat design



# SITOP power · Standard 24 V

## Single-phase and two-phase

Output current 5 A

### Overview

### SITOP modular



### The proven types



### Application

The modular power supply unit with single-phase and two-phase wide-range inputs for global use in many different fields of application; expansion of functions possible using add-on modules.

The tried and tested power supply unit with selectable input voltage range for supplying all standard applications in automation engineering; 6EP1333-2AA00 without limitation of input current harmonics.

### Technical specifications

Power supply, type	5 A	5 A	5 A
<b>Order No.</b>	<b>6EP1 333-3BA00</b>	<b>6EP1 333-2BA00</b>	<b>6EP1 333-2AA00</b>
<b>Input</b>	Single and two-phase AC	Single-phase AC	Single-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>120/230 to 500 V AC</b> Settable via selector switch on device	<b>120/230 V AC</b> Settable using wire jumper	<b>120/230 V AC</b> Settable using wire jumper
Voltage range	85 to 132 V/176 to 550 V AC	93 to 132 V/187 to 264 V AC	93 to 132 V/187 to 264 V AC
Overvoltage strength	1300 $V_{peak}$ , 1.3 ms	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms
Mains buffering at $I_{out \text{ rated}}$	> 25 ms at $V_{in} = 120/230 \text{ V}$	> 10 ms at $V_{in} = 93/187 \text{ V}$	> 20 ms at $V_{in} = 93/187 \text{ V}$
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	2.2 / 1.2 to 0.61 A	2.2/0.9 A	2.2/1.3 A
Inrush current limitation (+25 °C)	< 35 A	< 32 A, typ. 3 ms	< 32 A, typ. 3 ms
$I^2t$	< 1.7 A <sup>2</sup> s	< 0.8 A <sup>2</sup> s	< 0.8 A <sup>2</sup> s
Integrated line-side fuse	T 3, 15 A (not accessible)	T 3, 15 A/250 V (not accessible)	T 3, 15 A/250 V (not accessible)
Recommended circuit-breaker (IEC 898) in mains supply line	From 6 A (10 A) Characteristic C (B); with two-phase operation: circuit-breaker with two-pole connection or motor circuit-breaker 3RV1021-1EA10	From 6 A, Characteristic C	From 6 A, Characteristic C
<b>Output</b>	Stabilized, floating direct voltage	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>24 V DC</b>	<b>24 V DC</b>	<b>24 V DC</b>
Total tolerance	± 3 %	± 3 %	± 3 %
• Stat. mains compensation	Approx. 0.1 %	Approx. 0.1 %	Approx. 0.1 %
• Stat. load compensation	Approx. 0.1 %	Approx. 0.2 %	Approx. 0.2 %
Residual ripple (clock frequency: approx. 50 kHz)	< 50 mV <sub>pp</sub> (typ. 10 mV <sub>pp</sub> )	< 150 mV <sub>pp</sub>	< 150 mV <sub>pp</sub>
Spikes (bandwidth: 20 MHz)	< 200 mV <sub>pp</sub> (typ. 20 mV <sub>pp</sub> )	< 240 mV <sub>pp</sub>	< 240 mV <sub>pp</sub>
Setting range	24 to 28.8 V (max. 120 W)	22.8 to 26.4 V	22.8 to 26.4 V
Status display	Green LED for 24 V O.K.	Green LED for 24 V O.K.	Green LED for 24 V O.K.
Power ON/OFF behavior	Overshoot of $V_{out}$ approx. 3 %	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	< 1 s / < 50 ms	< 3 s / typ. 80 ms	< 3 s / typ. 80 ms
Rated current $I_{out \text{ rated}}$	<b>5 A</b>	<b>5 A</b>	<b>5 A</b>
Current range	0 to 5 A	0 to 5 A	0 to 5 A
• Up to +45 °C	0 to 5 A	0 to 5 A	0 to 5 A
• Up to +60 °C	0 to 5 A	0 to 5 A	0 to 5 A
Dyn. V/I with			
• Starting on short circuit	Approx. 5.5 A constant current	typ. 20 A for 350 ms	typ. 20 A for 350 ms
• Short-circuit in operation	typ. 15 A for 25 ms	Yes, 2	Yes, 2
Parallel connection for increased output	Yes, 2 (selectable current characteristic)		

Continued on page 4/4.

# SITOP power · Standard 24 V

## Single-phase and two-phase

Output current 5 A

4

### The S7-300 type



### The outdoor variant



### The flat design



The proven power supply in the SIMATIC S7-300 design; alternatively with PS-CPU connecting comb for snap-mounting on S7 busbar (Order No. 6ES7307-1EA00-0AA0) or without PS-CPU connecting comb for snap-mounting on DIN rail EN 50002-35x15 via mounting adapter (Order No. 6EP1 333-1SL11).

The power supply unit for extreme environmental conditions with SIMATIC S7-300 design, can be snapped onto S7 rail; with PS-CPU connecting comb.

The flat design which is of great advantage where only low mounting depths are available, e.g. for use with distributed I/O, in machine benches or alcoves; design matched to SIMATIC ET 200B.

5 A	5 A	5 A	5 A
<b>6ES7 307-1EA00-0AA0</b>	<b>6EP1 333-1SL11</b>	<b>6ES7 307-1EA80-0AA0<sup>1)</sup></b>	<b>6EP1 333-1AL12</b>
Single-phase AC <b>120/230 V AC</b> Settable via selector switch on device 85 to 132 V/170 to 264 V AC	Single-phase AC <b>120/230 V AC</b> Settable via selector switch on device 85 to 132 V/170 to 264 V AC	Single-phase AC <b>120/230 V AC</b> Settable via selector switch on device 93 to 132 V/187 to 264 V AC	Single-phase AC <b>120/230 V AC</b> Settable via selector switch on device 85 to 132 V/170 to 264 V AC
2.3 x V <sub>in rated</sub> , 1.3 ms > 20 ms at V <sub>in</sub> = 93/187 V 50/60 Hz; 47 to 63 Hz 2.1/1.3 A < 45 A, < 3 ms < 1.2 A <sup>2</sup> s F 4 A/250 V (not accessible) From 6 A, Characteristic C	2.3 x V <sub>in rated</sub> , 1.3 ms > 20 ms at V <sub>in</sub> = 93/187 V 50/60 Hz; 47 to 63 Hz 2.1/1.3 A < 45 A, < 3 ms < 1.2 A <sup>2</sup> s F 4 A/250 V (not accessible) From 6 A, Characteristic C	2.3 x V <sub>in rated</sub> , 1.3 ms > 20 ms at V <sub>in</sub> = 93/187 V 50/60 Hz, 47 to 63 Hz 2.1/1.2 A < 45 A, < 3 ms < 1.8 A <sup>2</sup> s (typ. 1.2 A <sup>2</sup> s) T 3.15 A/250 V (not accessible) From 10 A, Characteristic C or from 6 A, Characteristic D	2.3 x V <sub>in rated</sub> , 1.3 ms > 20 ms at V <sub>in</sub> = 93/187 V 50/60 Hz; 47 to 63 Hz 2.2/1.2 A < 32 A, < 3 ms < 0.8 A <sup>2</sup> s T 3.15 A/250 V (not accessible) From 6 A, Characteristic C
Stabilized, floating direct voltage <b>24 V DC</b> ± 3 % Approx. 0.1 % Approx. 0.2 % < 150 mV <sub>pp</sub> (typ. 40 mV <sub>pp</sub> ) < 240 mV <sub>pp</sub> (typ. 90 mV <sub>pp</sub> ) - Green LED for 24 V O.K. No overshoot of V <sub>out</sub> (soft start) < 2 s/typ. 60 ms <b>5 A</b> 0 to 5 A 0 to 5 A	Stabilized, floating direct voltage <b>24 V DC</b> ± 3 % Approx. 0.1 % Approx. 0.2 % < 150 mV <sub>pp</sub> (typ. 40 mV <sub>pp</sub> ) < 240 mV <sub>pp</sub> (typ. 90 mV <sub>pp</sub> ) - Green LED for 24 V O.K. No overshoot of V <sub>out</sub> (soft start) < 2 s/typ. 60 ms <b>5 A</b> 0 to 5 A 0 to 5 A	Stabilized, floating direct voltage <b>24 V DC</b> ± 3 % Approx. ± 0.2 % Approx. ± 0.4 % < 150 mV <sub>pp</sub> (typ. 40 mV <sub>pp</sub> ) < 240 mV <sub>pp</sub> (typ. 90 mV <sub>pp</sub> ) - Green LED for 24 V O.K. No overshoot of V <sub>out</sub> (soft start) < 3 s/typ. 100 ms <b>5 A</b> 0 to 5 A 0 to 5 A	Stabilized, floating direct voltage <b>24 V DC</b> ± 1 % Approx. 0.1 % Approx. 0.5 % < 150 mV <sub>pp</sub> (typ. 40 mV <sub>pp</sub> ) < 240 mV <sub>pp</sub> (typ. 100 mV <sub>pp</sub> ) 22 to 29 V Green LED for 24 V O.K. No overshoot of V <sub>out</sub> (soft start) < 2 s/typ. 40 ms <b>5 A</b> 0 to 5 A 0 to 5 A
typ. 20 A for 75 ms typ. 20 A for 75 ms Not permissible	typ. 20 A for 75 ms typ. 20 A for 75 ms Not permissible	typ. 20 A for 180 ms typ. 20 A for 80 ms Not permissible	typ. 20 A for 500 ms typ. 20 A for 500 ms Yes, 2

Continued on page 4/5.

1) SIPLUS module 6AG1 307-1EA80-2AA0 for enhanced temperature range -25 to +60 °C and use under medium load (e.g. chlorine/sulfur atmosphere). Conformity with EN 50155 available soon (electrical equipment on track vehicles).

# SITOP power · Standard 24 V

## Single-phase and two-phase

### Output current 5 A

Power supply, type	5 A	5 A	5 A
<b>Order No.</b>	<b>6EP1 333-3BA00</b>	<b>6EP1 333-2BA00</b>	<b>6EP1 333-2AA00</b>
<b>Efficiency</b>			
Efficiency at $V_{out rated}$ , $I_{out rated}$	Approx. 87 %	Approx. 87 %	Approx. 87 %
Power loss at $V_{out rated}$ , $I_{out rated}$	Approx. 18 W	Approx. 18 W	Approx. 18 W
<b>Control</b>			
Dyn. mains compensation ( $V_{in rated} \pm 15\%$ )	Approx. 0.1%	Approx. $\pm 0.3\% V_{out}$	Approx. $\pm 0.3\% V_{out}$
Dyn. load compensation ( $I_{out}$ : 50/100/50 %)	Approx. $+3\% V_{out}$	$\pm 2.5\% V_{out}$	$\pm 2.5\% V_{out}$
Settling time			
• Load step from 50 to 100 %	< 5 ms (typ. 2 ms)	typ. 0.2 ms	typ. 0.2 ms
• Load step from 100 to 50 %	< 5 ms (typ. 2 ms)	typ. 0.2 ms	typ. 0.2 ms
<b>Protection and monitoring</b>			
Output overvoltage protection	< 35 V	Yes, acc. to EN 60950	Yes, acc. to EN 60950
Current limitation	typ. 5.5 A	typ. 5.5 to 6.5 A	typ. 5.5 to 6.5 A
Short-circuit protection	Choice of stabilized current characteristic approx. 5.5 A or latching shutdown	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart
RMS sustained short-circuit current	Approx. 5.5 A	< 17 A	< 17 A
Overload/short-circuit indicator	Yellow LED for "overload", red LED for "latching shutdown"	-	-
<b>Safety</b>			
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950	Yes, SELV output voltage $V_{out}$ acc. to EN 60950
Protective class	Class I	Class I	Class I
Discharge current	< 3.5 mA (typ. 0.25 mA)	< 3.5 mA (typ. 0.4 mA)	< 3.5 mA (typ. 0.4 mA)
TÜV test	Yes	Yes; CB scheme	Yes; CB scheme
CE marking	Yes	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E197259	Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)	Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)
FM approval	-	-	-
Appr. for use in marine vessels	-	-	-
Degree of protection (EN 60529)	IP20	IP20	IP20
<b>EMC</b>			
Interference emission	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	EN 61000-3-2	EN 61000-3-2	-
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>			
Ambient temperature range	0 to +60 °C with natural convection	0 to +60 °C with natural convection	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C	-25 to +85 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>			
Connections			
• Mains input L, N, PE	One screw-type terminal each for 0.2 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded
• Output L+	2 screw-type terminals for 0.2 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 0.5 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 0.5 to 2.5 mm <sup>2</sup>
• Output M	2 screw-type terminals for 0.2 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	70 x 125 x 125	75 x 125 x 125	75 x 125 x 125
Weight approx.	1.2 kg	0.75 kg	0.57 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5
<b>Accessories</b>	Buffer module (6EP1961-3BA00) Signalling module (6EP1961-3BA10) Redundancy module (6EP1961-3BA20)	-	-

# SITOP power · Standard 24 V

## Single-phase and two-phase

Output current 5 A

4

5 A	5 A	5 A	5 A
<b>6ES7 307-1EA00-0AA0</b>	<b>6EP1 333-1SL11</b>	<b>6ES7 307-1EA80-0AA0</b>	<b>6EP1 333-1AL12</b>
Approx. 87 % Approx. 18 W	Approx. 87 % Approx. 18 W	Approx. 84 % Approx. 23 W	Approx. 88 % Approx. 17 W
± 0.3 % V <sub>out</sub>	± 0.3 % V <sub>out</sub>	± 0.3 % V <sub>out</sub>	± 0.3 % V <sub>out</sub>
± 2.5 % V <sub>out</sub>	± 2.5 % V <sub>out</sub>	± 3 % V <sub>out</sub>	± 0.5 % V <sub>out</sub>
typ. 0.1 ms	typ. 0.1 ms	< 5 ms (typ. 0.2 ms)	< 5 ms (typ. 0.1 ms)
typ. 0.1 ms	typ. 0.1 ms	< 5 ms (typ. 0.2 ms)	< 5 ms (typ. 0.1 ms)
Additional control loop, shut-down at approx. 30 V, automatic restart 5.5 to 6.5 A	Additional control loop, shut-down at approx. 30 V, automatic restart 5.5 to 6.5 A	Additional control loop, shut-down at approx. 30 V, automatic restart 5.5 to 6.5 A	Additional control loop, shut-down at approx. 33 V, automatic restart 5.5 to 6.5 A
Electronic shutdown, automatic restart	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart
< 9 A -	< 9 A -	< 5 A -	< 5 A -
Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178, clearance and creepage distances > 8 mm	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178
Class I < 3.5 mA (typ. 0.3 mA)	Class I < 3.5 mA (typ. 0.3 mA)	Class I < 3.5 mA (typ. 0.3 mA)	Class I < 3.5 mA (typ. 0.26 mA)
Yes Yes Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)	Yes Yes Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)	Yes Yes Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)	Yes Yes Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E197259
Yes, Class I Div. 2 Group A, B, C, D, T 4 in the S7-300 system IP20	Yes, Class I Div. 2 Group A, B, C, D, T 4 in the S7-300 system IP20	- Yes, GL, LRS IP20	- - IP20
EN 55022 Class B EN 61000-3-2 EN 61000-6-2	EN 55022 Class B EN 61000-3-2 EN 61000-6-2	EN 55011 Class A - EN 61000-6-2	EN 55022 Class B - EN 61000-6-2
0 to +60 °C with natural convection -40 to +85 °C	0 to +60 °C with natural convection -40 to +85 °C	-40 to +70 °C with natural convection -40 to +85 °C	0 to +60 °C with natural convection -25 to +85 °C
Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K5 acc. to EN 60721, brief condensation permissible	Climatic class 3K3 acc. to EN 60721, no condensation
One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
80 x 125 x 120 0.74 kg Snap-mounting on S7 rail	80 x 125 x 135 0.74 kg Snap-mounting on DIN rail EN 50022-35x15	80 x 125 x 120 0.57 kg Snap-mounting on S7 rail	160 x 130 x 60 0.6 kg Snap-mounting on DIN rail EN 50022-35x15/7.5
Mounting adapter for DIN rail and connecting comb	Mounting adapter for DIN rail and connecting comb	Mounting adapter for DIN rail and connecting comb	Mounting bracket

# SITOP power · Standard 24 V

## Single-phase and two-phase

Notes

4



# SITOP power · Standard 24 V Single-phase and two-phase

# 5



## Output current 10 A

- 5/2 SITOP modular
- 5/2 The proven types
- 5/3 The IP65 version
- 5/3 The S7-300 type
- 5/3 The flat design
- 5/3 The universal type



# SITOP power · Standard 24 V

## Single-phase and two-phase

Output current 10 A

### Overview

#### SITOP modular



#### The proven types



### Application

The modular power supply unit with single-phase and two-phase wide-range inputs for global use in many different fields of application; expansion of functions possible using add-on modules.

The tried and tested power supply unit with selectable input voltage range for supplying all standard applications in automation engineering; 6EP1334-2AA00 without limitation of input current harmonics.

### Technical specifications

Power supply, type	10 A	10 A	10 A
Order No.	6EP1 334-3BA00	6EP1 334-2BA00	6EP1 334-2AA00
Input	Single and two-phase AC	Single-phase AC	Single-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>120/230 to 500 V AC</b> Settable via selector switch on device	<b>120/230 V AC</b> Settable using wire jumper	<b>120/230 V AC</b> Settable using wire jumper
Voltage range	85 to 132/176 to 550 V AC	85 to 132/187 to 264 V AC	85 to 132/187 to 264 V AC
Overvoltage strength	1300 $V_{peak}$ , 1.3 ms	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms
Mains buffering at $I_{out \text{ rated}}$	> 25 ms at $V_{in} = 120/230 \text{ V}$	> 10 ms at $V_{in} = 93/187 \text{ V}$	> 20 ms at $V_{in} = 93/187 \text{ V}$
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	4.4 / 2.4 to 1.1 A	5.5 / 2.1 A	5.5 / 3.2 A
Inrush current limitation (+25 °C)	< 35 A	< 65 A, typ. 3 ms	< 65 A, typ. 3 ms
$I^2t$	< 4.0 $A^2s$	< 3.3 $A^2s$	< 3.3 $A^2s$
Integrated line-side fuse	T 6.3 A (not accessible)	T 6.3 A/250 V (not accessible)	T 6.3 A/250 V (not accessible)
Recommended circuit-breaker (IEC 898) in mains supply line	From 6 A (10 A) Characteristic C (B); with two-phase operation: circuit-breaker with two-pole connection or motor circuit-breaker 3RV1021-1EA10	From 10 A, Characteristic C	From 10 A, Characteristic C
Output	Stabilized, floating direct voltage	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>24 V DC</b>	<b>24 V DC</b>	<b>24 V DC</b>
Total tolerance	± 3 %	± 3 %	± 3 %
• Stat. mains compensation	Approx. 0.1 %	Approx. 0.2 %	Approx. 0.2 %
• Stat. load compensation	Approx. 0.1 %	Approx. 1 %	Approx. 1 %
Residual ripple (clock frequency: approx. 50 kHz)	< 50 $mV_{pp}$ (typ. 10 $mV_{pp}$ )	< 150 $mV_{pp}$	< 150 $mV_{pp}$
Spikes (bandwidth: 20 MHz)	< 200 $mV_{pp}$ (typ. 20 $mV_{pp}$ )	< 240 $mV_{pp}$	< 240 $mV_{pp}$
Setting range	24 to 28.8 V (max. 240 W)	22.8 to 28.8 V	22.8 to 28.8 V
Status display	Green LED for 24 V O.K.	Green LED for 24 V O.K.	Green LED for 24 V O.K.
Power ON/OFF behavior	Overshoot of $V_{out}$ approx. 3%	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	< 1 s / < 50 ms	< 3 s / typ. 80 ms	< 3 s / typ. 80 ms
Rated current $I_{out \text{ rated}}$	<b>10 A</b>	<b>10 A</b>	<b>10 A</b>
Current range			
• Up to +45 °C	0 to 10 A	0 to 12 A	0 to 12 A
• Up to +60 °C	0 to 10 A	0 to 10 A	0 to 10 A
Dyn. V/I with			
• Starting on short circuit	Approx. 12 A constant current	typ. 38 A for 200 ms	typ. 38 A for 200 ms
• Short-circuit in operation	typ. 30 A for 25 ms		
Parallel connection for increased output	Yes, 2 (selectable current characteristic)	Yes, 2	Yes, 2

Continued on page 5/4.

# SITOP power · Standard 24 V

## Single-phase and two-phase

Output current 10 A

### The IP65 version



Power supply unit with IP65 degree of protection, design and functionality optimally matched to ET 200X distributed I/O devices. When using without ET 200X, the connector seal accessory is required.

### The S7-300 type



The proven power supply in the SIMATIC S7-300 design; alternatively with PS-CPU connecting comb for snap-mounting on S7 busbar or without connecting comb for snap-mounting on DIN rail EN 50022-35x15 via mounting adapter.

### The flat design



The flat design which is of great advantage where only low mounting depths are available, e.g. for use with distributed I/O, in machine benches or alcoves; design matched to SIMATIC ET 200B.

### The universal type



The universal power supply unit for all supply networks, with a wide-range input from 93 V to 264 V AC and 110 V to 350 V DC for supply from all typical networks.

5

#### 10 A

##### 6EP1 334-2CA00

Single-phase AC  
**120/230 V AC**  
Settable using wire jumper  
93 to 132/187 to 264 V AC

$2.3 \times V_{in \text{ rated}}$ , 1.3ms  
> 20 ms at  $V_{in} = 93/187$  V  
50/60 Hz, 47 to 63 Hz  
4.3/2.6 A  
< 65 A, < 3 ms  
< 2.5 A<sup>2</sup>s  
T 6.3 A/250 V (not accessible)  
From 16 A, Characteristic C

#### 10 A

##### 6ES7 307-1KA01-0AA0 / 6EP1334-1SL12

Single-phase AC  
**120/230 V AC**  
Settable via selector switch on device  
85 to 132/170 to 264 V AC

$2.3 \times V_{in \text{ rated}}$ , 1.3 ms  
> 20 ms at  $V_{in} = 93/187$  V  
50/60 Hz; 47 to 63 Hz  
4.1/1.8 A  
< 55 A, < 3 ms  
< 3.3 A<sup>2</sup>s  
T 6.3 A/250 V (not accessible)  
From 10 A, Characteristic C

#### 10 A

##### 6EP1 334-1AL12

Single-phase AC  
**120/230 V AC**  
Settable via selector switch on device  
85 to 132/170 to 264 V AC

$2.3 \times V_{in \text{ rated}}$ , 1.3 ms  
> 20 ms at  $V_{in} = 93/187$  V  
50/60 Hz; 47 to 63 Hz  
4/2.5 A  
< 65 A, < 3 ms  
< 3.3 A<sup>2</sup>s  
T 6.3 A/250 V (not accessible)  
From 10 A, Characteristic C

#### 10 A

##### 6EP1 334-1SH01

Single-phase AC  
**120 to 230 V AC**  
wide-range input  
93 to 264 V AC or 110 to  
350 V DC

$2.3 \times V_{in \text{ rated}}$ , 1.3 ms  
> 20 ms at  $V_{in} = 93/187$  V  
0/50/60 Hz; 47 to 63 Hz  
2.5 to 1.3 A  
< 20 A, < 3 ms  
< 1.5 A<sup>2</sup>s  
T 6.3 A (not accessible)  
From 16 A, Characteristic C

Stabilized, floating direct voltage

#### 24 V DC

± 3 %  
Approx. 0.2 %  
Approx. 1 %

< 150 mV<sub>pp</sub>

< 240 mV<sub>pp</sub>

22.8 to 25.2 V  
Green LED for 24 V O.K.  
No overshoot of  $V_{out}$   
(soft start)

< 3 s/typ. 80 ms

#### 10 A

0 to 10 A (up to +40 °C)  
0 to 8 A (up to +55 °C)

typ. 38 A for 200 ms  
Yes, 2

Stabilized, floating direct voltage

#### 24 V DC

± 3 %  
Approx. 0.1 %  
Approx. 0.5 %

< 150 mV<sub>pp</sub> (typ. 40 mV<sub>pp</sub>)

< 240 mV<sub>pp</sub> (typ. 100 mV<sub>pp</sub>)

-  
Green LED for 24 V O.K.  
No overshoot of  $V_{out}$   
(soft start)

< 1.5 s/typ. 80 ms

#### 10 A

0 to 10 A  
0 to 10 A

typ. 35 A for 80 ms  
typ. 35 A for 150 ms  
Not permissible

Stabilized, floating direct voltage

#### 24 V DC

± 1 %  
Approx. 0.1 %  
Approx. 0.5 %

< 150 mV<sub>pp</sub> (typ. 50 mV<sub>pp</sub>)

< 240 mV<sub>pp</sub> (typ. 200 mV<sub>pp</sub>)

22 to 29 V  
Green LED for 24 V O.K.  
No overshoot of  $V_{out}$   
(soft start)

< 2 s/typ. 40 ms

#### 10 A

0 to 10 A  
0 to 10 A

typ. 35 A for 700 ms  
typ. 35 A for 700 ms  
Yes, 2

Stabilized, floating direct voltage

#### 24 V DC

± 1 %  
< ± 0.1 %  
< ± 0.2 %

< 100 mV<sub>pp</sub>

< 100 mV<sub>pp</sub>

-  
Green LED for 24 V O.K.  
No overshoot of  $V_{out}$   
(soft start)

< 3 s/typ. 100 ms

#### 10 A

0 to 10 A  
0 to 10 A

Approx. 11 A constant current  
Approx. 11 A constant current  
Yes, 2

Continued on page 5/5.

# SITOP power · Standard 24 V

## Single-phase and two-phase

### Output current 10 A

Power supply, type	10 A	10 A	10 A
Order No.	6EP1 334-3BA00	6EP1 334-2BA00	6EP1 334-2AA00
<b>Efficiency</b>			
Efficiency at $V_{out rated}$ , $I_{out rated}$	Approx. 87 %	Approx. 89 %	Approx. 89 %
Power loss at $V_{out rated}$ , $I_{out rated}$	Approx. 36 W	Approx. 30 W	Approx. 30 W
<b>Control</b>			
Dyn. mains compensation ( $V_{in rated} \pm 15\%$ )	Approx. 0.1 %	Approx. $\pm 0.3\%$ $V_{out}$	Approx. $\pm 0.3\%$ $V_{out}$
Dyn. load compensation ( $I_{out}$ : 50/100/50 %)	Approx. $+3\%$ $V_{out}$	$\pm 5\%$ $V_{out}$	$\pm 5\%$ $V_{out}$
Settling time			
• Load step from 50 to 100 %	< 5 ms (typ. 2 ms)	typ. 0.2 ms	typ. 0.2 ms
• Load step from 100 to 50 %	< 5 ms (typ. 2 ms)	typ. 0.2 ms	typ. 0.2 ms
<b>Protection and monitoring</b>			
Output overvoltage protection	< 35 V	Yes, acc. to EN 60950	Yes, acc. to EN 60950
Current limitation	typ. 12 A	typ. 13 to 15 A	typ. 13 to 15 A
Short-circuit protection	Choice of stabilized current characteristic approx. 12 A or latching shutdown	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart
RMS sustained short-circuit current	Approx. 12 A	< 21 A	< 21 A
Overload/short-circuit indicator	Yellow LED for "overload", red LED for "latching shutdown"	-	-
<b>Safety</b>			
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950	Yes, SELV output voltage $V_{out}$ acc. to EN 60950
Protective class	Class I	Class I	Class I
Discharge current	< 3.5 mA (typ. 0.32 mA)	< 3.5 mA (typ. 0.4 mA)	< 3.5 mA (typ. 0.4 mA)
TÜV test	Yes	Yes; CB scheme	Yes; CB scheme
CE marking	Yes	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91) File E197259	Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)	Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)
FM approval	-	-	-
Appr. for use in marine vessels	-	-	-
Degree of protection (EN 60529)	IP20	IP20	IP20
<b>EMC</b>			
Interference emission	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	EN 61000-3-2	EN 61000-3-2	-
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>			
Ambient temperature range	0 to +60 °C with natural convection	0 to +60 °C with natural convection	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C	-25 to +85 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>			
Connections			
• Mains input L, N, PE	One screw-type terminal each for 0.2 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded
• Output L+	2 screw-type terminals for 0.2 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 0.5 to 2.5 mm <sup>2</sup>	1 screw-type terminal for 0.5 to 2.5 mm <sup>2</sup>
• Output M	2 screw-type terminals for 0.2 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	90 x 125 x 125	100 x 125 x 135	100 x 125 x 135
Weight approx.	1.4 kg	1.08 kg	0.78 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5
<b>Accessories</b>	Buffer module (6EP1961-3BA00) Signalling module (6EP1961-3BA10) Redundancy module (6EP1961-3BA20)	-	-

# SITOP power · Standard 24 V Single-phase and two-phase

Output current 10 A

10 A	10 A	10 A	10 A
<b>6EP1 334-2CA00</b>	<b>6ES7 307-1KA01-0AA0 / 6EP1334-1SL12</b>	<b>6EP1 334-1AL12</b>	<b>6EP1 334-1SH01</b>
Approx. 87 % Approx. 36 W	Approx. 87 % Approx. 34 W	Approx. 89 % Approx. 30 W	Approx. 85 % Approx. 42 W
± 0.3 % V <sub>out</sub>	± 0.3 % V <sub>out</sub>	± 0.3 % V <sub>out</sub>	± 0.3 % V <sub>out</sub>
± 5 % V <sub>out</sub>	± 2.5 % V <sub>out</sub>	± 0.6 % V <sub>out</sub>	± 1.5 % V <sub>out</sub>
typ. 0.2 ms typ. 0.2 ms	< 5 ms < 5 ms	< 5 ms (typ. 0.1 ms) < 5 ms (typ. 0.2 ms)	< 20 ms (typ. 10 ms) < 20 ms (typ. 10 ms)
Yes, acc. to EN 60950	Additional control loop, shut-down at approx. 30 V, automatic restart	Additional control loop, shut-down at approx. 33 V, automatic restart	Yes, acc. to EN 60950
typ. 9 to 11 A	11 to 12 A	11 to 13 A	11 to 13 A
Choice of automatic restart or latching shutdown	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart	Stabilized current characteristic down to 0 V
< 21 A Red LED for overtemperature switch-off	< 10 A -	< 10 A -	< 14 A -
Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 Class I < 3.5 mA (typ. 0.9 mA)	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178 Class I < 3.5 mA (typ. 0.5 mA)	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 and EN 50178 Class I < 3.5 mA (typ. 0.27 mA)	Yes, SELV output voltage V <sub>out</sub> acc. to EN 60950 Class I < 3.5 mA
Yes Yes Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)	Yes Yes Yes, UL listed (UL 508) File E143289, CSA (CSA 22.2 No. 14-95)	Yes Yes Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E197259	Yes Yes Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289
- - IP65	Yes, Class I Div. 2, A, B, C, D, T4 in the S7-300 system IP20	- - IP20	- - IP20
EN 55011 Class A - EN 61000-6-2	EN 55022 Class B EN 61000-3-2 EN 61000-6-2	EN 55022 Class B - EN 61000-6-2	EN 55022 Class B EN 61000-3-2 EN 61000-6-2
-25 to +55 °C (power derating above +40 °C) -40 to +70 °C	0 to +60 °C with natural convection -40 to +85 °C	0 to +60 °C with natural convection -25 to +85 °C	0 to +60 °C with natural convection -25 to +85 °C
Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
Screw-type terminals 0.5 to 2.5 mm <sup>2</sup> (PG11 screwed gland) Screw terminals, or connection via expansion interface on the backplane bus of the ET 200X Screw terminals, or connection via expansion interface on the backplane bus of the ET 200X	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 4 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>  4 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>  3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded 3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>  3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
140 x 270 x 126	120 x 125 x 120 <sup>1)</sup> 120 x 125 x 135 <sup>2)</sup>	160 x 130 x 60	200 x 125 x 135
1.7 kg Wall mounting, any mounting position	1.1 kg Snap-mounting on S7 rail <sup>1)</sup> Snap-mounting on DIN rail EN 50022-35x15 <sup>2)</sup>	0.72 kg Snap-mounting on DIN rail EN 50022-35x15/7.5	1.8 kg Snap-mounting on DIN rail EN 50022-35x15 or on S7 rail
IP65 connector seal	Mounting adapter for DIN rail and PS-CPU connecting comb	Mounting bracket	-

1) Order No. 6ES7307-1KA01-0AA0.

2) Order No. 6EP1334-1SL12.

# SITOP power · Standard 24 V

## Single-phase and two-phase

Notes

5



# SITOP power · Standard 24 V Single-phase and two-phase

# 6



6/2  
6/3  
6/3

## Output currents 20 A and 40 A

SITOP modular

The proven type

The two-phase version



# SITOP power · Standard 24 V

## Single-phase and two-phase

Output currents 20 A and 40 A

### Overview

#### SITOP modular



#### SITOP modular



### Application

The modular power supply units with single-phase and two-phase inputs for global use in many different fields of application; expansion of functions possible using add-on modules.

### Technical specifications

Power supply, type	20 A	40 A
<b>Order No.</b>	<b>6EP1 336-3BA00</b>	<b>6EP1 337-3BA00</b>
<b>Input</b>	Single/two-phase AC	Single/two-phase AC
Rated voltage $V_{in\ rated}$	<b>120/230 V AC</b> Settable using wire jumper on device	<b>120/230 V AC</b> Settable using wire jumper on device
Voltage range	85 to 132/176 to 264 V	85 to 132/176 to 264 V
Overvoltage strength	$2.3 \times V_{in\ rated}$ , 1.3 ms	$2.3 \times V_{in\ rated}$ , 1.3 ms
Mains buffering at $I_{out\ rated}$	> 20 ms at $V_{in} = 230\text{ V}$	> 20 ms at $V_{in} = 230\text{ V}$
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in\ rated}$	7.7/3.5 A	15/8 A
Inrush current limitation (+25 °C)	< 60 A	< 125 A
$I^2t$	< 9.9 A <sup>2</sup> s	< 26 A <sup>2</sup> s
Integrated line-side fuse	Yes	Yes
Recommended circuit-breaker (IEC 898) in mains supply line	10 A Char. C (2-pole coupled with 2-phase operation) or motor circuit-breaker 3RV1421-...	20 A Char. C (2-pole coupled with 2-phase operation) or motor circuit-breaker 3RV1421-...
<b>Output</b>	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out\ rated}$	<b>24 V DC</b>	<b>24 V DC</b>
Total tolerance	± 3 %	± 3 %
• Stat. mains compensation	Approx. 0.1 %	Approx. 0.1 %
• Stat. load compensation	Approx. 0.1 %	Approx. 0.1 %
Residual ripple (clock frequency: approx. 50 kHz)	< 100 mV <sub>pp</sub> (typ. 30 mV <sub>pp</sub> )	< 100 mV <sub>pp</sub> (typ. 60 mV <sub>pp</sub> )
Spikes (bandwidth: 20 MHz)	< 200 mV <sub>pp</sub> (typ. 60 mV <sub>pp</sub> )	< 200 mV <sub>pp</sub> (typ. 120 mV <sub>pp</sub> )
Setting range	24 to 28.8 V (max. 480 W)	24 to 28.8 V (max. 960 W)
Status display	Green LED for 24 V O.K.	Green LED for 24 V O.K.
Power ON/OFF behavior	Overshoot of $V_{out}$ approx. 3 %	Overshoot of $V_{out}$ approx. 3 %
Starting delay/voltage rise	< 0.1 s / < 50 ms	< 0.1 s / < 50 ms
Rated current $I_{out\ rated}$	<b>20 A</b>	<b>40 A</b>
Current range		
• Up to +45 °C	0 to 20 A	0 to 40 A <sup>1)</sup>
• Up to +60 °C	0 to 20 A	0 to 40 A <sup>1)</sup>
Dyn. V/I with		
• Starting on short circuit	Approx. 23 A constant current	Approx. 46 A constant current
• Short-circuit in operation	typ. 60 A for 25 ms	typ. 120 A for 25 ms
Parallel connection for increased output	Yes, 2 (selectable current characteristic)	Yes, 2 (selectable current characteristic)

Continued on page 6/4.

1) Derating in 120 V operation necessary.

# SITOP power · Standard 24 V Single-phase and two-phase

Output currents 20 A and 40 A

## The proven type



## The two-phase version



The tried and tested power supply unit with selectable input voltage range for supplying all standard applications in automation engineering.

The power supply unit with 2-phase wide-range input for widely changing power supply networks (> 550 V) as well as industrial networks in Canada and the USA.

### 20 A

#### 6EP1 336-2BA00

Single-phase AC  
**120/230 V AC**  
Settable using wire jumper

93 to 132/187 to 264 V AC

$2.3 \times V_{in \text{ rated}}$ , 1.3 ms

> 10 ms at  $V_{in} = 93/187 \text{ V}$

50/60 Hz, 47 to 63 Hz

8.0/3.3 A

< 81 A

< 8 A<sup>2</sup>s

T 10 A (not accessible)

Circuit-breaker from 16 A

Characteristic C

Stabilized, floating direct voltage

**24 V DC**

± 3 %

< 150 mV<sub>pp</sub>

< 240 mV<sub>pp</sub>

22.8 to 26.4 V<sup>1)</sup>

Green LED for 24 V O.K.

No overshoot of  $V_{out}$

(soft start)

< 3 s/typ. 80 ms

**20 A**

0 to 20 A

0 to 20 A (55 °C)

Approx. 20 A constant current

Approx. 20 A constant current

Yes, 2<sup>1)</sup>

### 20 A

#### 6EP1 536-2AA00

Two-phase AC  
**500 to 600 V 2 AC**  
wide-range input

420 to 682 V 2 AC

$2.3 \times V_{in \text{ rated}}$ , 1.3 ms

6/30 ms at  $V_{in} = 420/600 \text{ V}$

50/60 Hz; 47 to 63 Hz

1.82 A (at 420 V)

typ. 25 A

< 1.0 A<sup>2</sup>s

none

Required: 2-pole coupled circuit-breaker Char. C max. 10 A

or motor circuit-breaker

3RV1021-1DA10, setting 3 A

Stabilized, floating direct voltage

**24 V DC**

± 3 %

< 150 mV<sub>pp</sub>

< 240 mV<sub>pp</sub>

22.8 to 28.8 V<sup>2)</sup>

Green LED for 24 V O.K.

Small overshoot of  $V_{out}$  (< 2 V for

max. 500 ms)

-

**20 A**

0 to 20 A

0 to 20 A

Approx. 25 A constant current

Approx. 28 A constant current

Yes, 2<sup>2)</sup>

Continued on page 6/5.

1) Only permissible with ambient temperature from 0 to 45 °C.

2) Only permissible with ambient temperature from 0 to 50 °C.

# SITOP power · Standard 24 V

## Single-phase and two-phase

### Output currents 20 A and 40 A

Power supply, type	20 A	40 A
<b>Order No.</b>	<b>6EP1 336-3BA00</b>	<b>6EP1 337-3BA00</b>
<b>Efficiency</b>		
Efficiency at $V_{out rated}$ , $I_{out rated}$	Approx. 89 %	Approx. 88 %
Power loss at $V_{out rated}$ , $I_{out rated}$	Approx. 59 W	Approx. 131 W
<b>Control</b>		
Dyn. mains compensation ( $V_{in rated} \pm 15\%$ )	< 1 % $V_{out}$	< 1 % $V_{out}$
Dyn. load compensation ( $I_{out}$ : 50/100/50 %)	Approx. $\pm 2\%$ $V_{out}$	Approx. $\pm 2\%$ $V_{out}$
Settling time		
• Load step from 50 to 100 %	< 5 ms (typ. 2 ms)	< 5 ms (typ. 2 ms)
• Load step from 100 to 50 %	< 5 ms (typ. 2 ms)	< 5 ms (typ. 2 ms)
<b>Protection and monitoring</b>		
Output overvoltage protection	< 35 V	< 35 V
Current limitation	typ. 23 A	typ. 46 A
Short-circuit protection	Choice of stabilized current characteristic approx. 23 A or latching shutdown	Choice of stabilized current characteristic approx. 46 A or latching shutdown
RMS sustained short-circuit current	Approx. 23 A	Approx. 46 A
Overload/short-circuit indicator	Yellow LED for "overload", red LED for "latching shutdown"	Yellow LED for "overload", red LED for "latching shutdown"
<b>Safety</b>		
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178
Protective class	Class I	Class I
Discharge current	< 3.5 mA (typ. 0.4 mA)	< 3.5 mA (typ. 0.4 mA)
TÜV test	Yes	Yes
CE marking	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E197259	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E197259
FM approval	-	-
Appr. for use in marine vessels	-	-
Degree of protection (EN 60529)	IP20	IP20
<b>EMC</b>		
Interference emission	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	EN 61000-3-2	-
Interference immunity	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>		
Ambient temperature range	0 to +60 °C with natural convection	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>		
Connections		
• Mains input L, N, PE	One screw-type terminal each for 0.2 to 4 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.2 to 4 mm <sup>2</sup> single-core/finely stranded
• Output L+	2 screw-type terminals for 0.5 to 4 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 10 mm <sup>2</sup>
• Output M	2 screw-type terminals for 0.5 to 4 mm <sup>2</sup>	2 screw-type terminals for 0.5 to 10 mm <sup>2</sup>
Dimensions (W x H x D) in mm	160 x 125 x 125	240 x 125 x 125
Weight approx.	2.2 kg	2.9 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5
<b>Accessories</b>		
	Buffer module (6EP1961-3BA00)	Buffer module (6EP1961-3BA00)
	Signalling module (6EP1961-3BA10)	Signalling module (6EP1961-3BA10)
	Redundancy module (6EP1961-3BA20)	Redundancy module (6EP1961-3BA20)

# SITOP power · Standard 24 V Single-phase and two-phase

Output currents 20 A and 40 A

**20 A**

**6EP1 336-2BA00**

**20 A**

**6EP1 536-2AA00**

Approx. 87 %  
Approx. 72 W

Approx. 89 %  
Approx. 60 W

Approx.  $\pm 0.3\%$   $V_{out}$   
 $\pm 1\%$   $V_{out}$

$< 1\%$   $V_{out}$   
-4 %, +2 %  $V_{out}$

$V_{out}$  not outside tolerance  
 $V_{out}$  not outside tolerance

$< 3$  ms  
 $< 3$  ms

Yes, acc. to EN 60950  
typ. 22 A

Yes, acc. to EN 60950  
typ. 21 to 26 A

Stabilized current characteristic  
down to 0 V

Stabilized current characteristic  
approx. 28 A

$< 22$  A

Approx. 28 A

-

-

Yes, SELV output voltage  $V_{out}$   
acc. to EN 60950  
Class I  
 $< 3.5$  mA

Yes, SELV output voltage  $V_{out}$   
acc. to EN 60950  
Class I  
 $< 0.78$  mA (550 V/60 Hz)

Yes  
Yes

Yes  
Yes

Yes, UL listed (UL 508)  
File E143289, CSA (CSA 22.2  
No. 14-95)

Yes, UL listed (UL 508)  
File E143289, CSA (CSA 22.2  
No. 14-95)

-

-

-

-

IP20

IP20

EN 55022 Class B  
EN 61000-3-2  
EN 61000-6-2

EN 55011 Class A  
-  
EN 61000-6-2

0 to +55 °C with natural  
convection

0 to +60 °C with natural  
convection

-25 to +85 °C

-25 to +85 °C

Climatic class 3K3 acc. to  
EN 60721, no condensation

Climatic class 3K3 acc. to  
EN 60721, no condensation

One screw-type terminal each  
for 0.5 to 2.5 mm<sup>2</sup> single-  
core/finely stranded  
1 screw-type terminal for  
0.33 to 10 mm<sup>2</sup>  
2 screw-type terminals for  
0.33 to 10 mm<sup>2</sup>

One screw-type terminal each  
for 0.5 to 2.5 mm<sup>2</sup> single-  
core/finely stranded  
1 screw-type terminal for  
0.33 to 10 mm<sup>2</sup>  
2 screw-type terminals for  
0.33 to 10 mm<sup>2</sup>

280 x 125 x 92

280 x 180 x 92

2.4 kg

3.3 kg

Snap-mounting on DIN rail  
EN 50022-35x15/7.5

Snap-mounting on DIN rail  
EN 50022-35x15/7.5

Mounting bracket 90°  
(6EP1971-2BA00)

Mounting bracket 90°  
(6EP1971-2BA00)

6

# SITOP power · Standard 24 V

## Single-phase and two-phase

Notes

6

## SITOP power · Standard 24 V Three-phase



7/2  
7/2  
7/3  
7/6  
7/6  
7/7

### Output currents 5 A to 40 A

- SITOP modular
  - 5 A and 10 A
  - 20 A and 40 A
- The proven types
  - 10 A and 20 A
  - 30 A and 40 A



# SITOP power · Standard 24 V Three-phase

Output currents 5 A to 40 A

## Overview

### SITOP modular



### SITOP modular



## Application

The modular power supply units with wide-range input for two-phase connection to three-phase power supply networks; for global use in many different fields of application; expansion of functions possible using add-on modules.

## Technical specifications

Power supply, type	5 A	10 A
<b>Order No.</b>	<b>6EP1 333-3BA00</b>	<b>6EP1 334-3BA00</b>
<b>Input</b>	Two-phase AC <b>120/230 to 500 V AC</b> Settable via selector switch on device	Two-phase AC <b>120/230 to 500 V AC</b> Settable via selector switch on device
Rated voltage $V_{in \text{ rated}}$	85 to 132/176 to 550 V AC	85 to 132/176 to 550 V AC
Voltage range	85 to 132/176 to 550 V AC	85 to 132/176 to 550 V AC
Overvoltage strength	1300 $V_{peak}$ , 1.3 ms	1300 $V_{peak}$ , 1.3 ms
Mains buffering at $I_{out \text{ rated}}$	> 25 ms at $V_{in} = 120/230$ V	> 25 ms at $V_{in} = 120/230$ V
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	2.2/1.2 to 0.61 A	4.4/2.4 to 1.1 A
Inrush current limitation (+25 °C)	< 35 A	< 35 A
$I^2t$	< 1.7 A <sup>2</sup> s	< 4.0 A <sup>2</sup> s
Integrated line-side fuse	T 3, 15 A	T 6.3 A
Required fuse protection in mains supply line	Circuit-breaker 6 A (10 A) Characteristic C (B), 2-pole coupled, or motor circuit-breaker 3RV1021-...	Circuit-breaker 6 A (10 A) Characteristic C (B), 2-pole coupled, or motor circuit-breaker 3RV1021-...
<b>Output</b>	Stabilized, floating direct voltage <b>24 V DC</b>	Stabilized, floating direct voltage <b>24 V DC</b>
Rated voltage $V_{out \text{ rated}}$	24 V DC	24 V DC
Total tolerance	± 3 %	± 3 %
• Stat. mains compensation	Approx. 0.1 %	Approx. 0.1 %
• Stat. load compensation	Approx. 0.1 %	Approx. 0.1 %
Residual ripple (clock frequency: approx. 50 kHz)	< 50 mV <sub>pp</sub> (typ. 10 mV <sub>pp</sub> )	< 50 mV <sub>pp</sub> (typ. 10 mV <sub>pp</sub> )
Spikes (bandwidth: 20 MHz)	< 200 mV <sub>pp</sub> (typ. 20 mV <sub>pp</sub> )	< 200 mV <sub>pp</sub> (typ. 20 mV <sub>pp</sub> )
Setting range	24 to 28.8 V (max. 120 W)	24 to 28.8 V (max. 240 W)
Status display	Green LED for 24 V O.K.	Green LED for 24 V O.K.
Power ON/OFF behavior	Overshoot of $V_{out}$ approx. 3 %	Overshoot of $V_{out}$ approx. 3 %
Starting delay/voltage rise	< 1 s / < 50 ms	< 1 s / < 50 ms
Rated current $I_{out \text{ rated}}$	<b>5 A</b>	<b>10 A</b>
Current range	0 to 5 A	0 to 10 A
• Up to +45 °C	0 to 5 A	0 to 10 A
• Up to +60 °C	0 to 5 A	0 to 10 A
Dyn. V/I with		
• Starting on short circuit	Approx. 5.5 A constant current	Approx. 12 A constant current
• Short-circuit in operation	typ. 15 A for 25 ms	typ. 30 A for 25 ms
Parallel connection for increased output	Yes, 2 (selectable current characteristic)	Yes, 2 (selectable current characteristic)

Continued on page 7/4.

# SITOP power · Standard 24 V Three-phase

Output currents 5 A to 40 A

SITOP modular



SITOP modular



The modular power supply units with three-phase wide-range input for global use in many different fields of application; expansion of functions possible using add-on modules.

## 20 A

### 6EP1 436-3BA00

Three-phase AC  
**400 to 500 V 3 AC**  
wide-range input

320 to 550 V  
(startup from  $V_{in} > 340$ )

$2.3 \times V_{in \text{ rated}}$ , 1.3 ms

> 6 ms at  $V_{in} = 400$  V

50/60 Hz; 47 to 63 Hz

1.1 A ( $V_{in} = 400$  V)

< 35 A

< 0.7 A<sup>2</sup>s

None

3-pole coupled circuit-breaker

6 to 16 A Char. C or motor

circuit-breaker 3RV1021-1DA10,  
setting 3 A

Stabilized, floating direct voltage

### 24 V DC

± 3 %

Approx. ± 0.1 %

Approx. ± 0.2 %

< 100 mV<sub>pp</sub>

< 200 mV<sub>pp</sub>

24 to 28.8 V (max. 480 W)

Green LED for 24 V O.K.

No overshoot of  $V_{out}$  (soft start)

< 2.5 s / < 500 ms

## 20 A

0 to 20 A

0 to 20 A

Approx. 23 A constant current

typ. 60 A for 25 ms

Yes, 2 (selectable current  
characteristic)

Continued on page 7/5.

## 40 A

### 6EP1 437-3BA00

Three-phase AC  
**400 to 500 V 3 AC**  
wide-range input

320 to 550 V  
(startup from  $V_{in} > 340$ )

$2.3 \times V_{in \text{ rated}}$ , 1.3 ms

> 6 ms at  $V_{in} = 400$  V

50/60 Hz; 47 to 63 Hz

2.2 A ( $V_{in} = 400$  V)

< 70 A

< 2.8 A<sup>2</sup>s

None

3-pole coupled circuit-breaker

10 to 16 A Char. C or motor

circuit-breaker 3RV1021-1DA10,  
setting 3 A

Stabilized, floating direct voltage

### 24 V DC

± 3 %

Approx. ± 0.1 %

Approx. ± 0.2 %

< 100 mV<sub>pp</sub>

< 200 mV<sub>pp</sub>

24 to 28.8 V (max. 960 W)

Green LED for 24 V O.K.

No overshoot of  $V_{out}$  (soft start)

< 2.5 s / < 500 ms

## 40 A

0 to 40 A

0 to 40 A

Approx. 46 A constant current

typ. 120 A for 25 ms

Yes, 2 (selectable current  
characteristic)

# SITOP power · Standard 24 V Three-phase

Output currents 5 A to 40 A

Power supply, type	5 A	10 A
<b>Order No.</b>	<b>6EP1 333-3BA00</b>	<b>6EP1 334-3BA00</b>
<b>Efficiency</b>		
Efficiency at $V_{out rated}$ , $I_{out rated}$	Approx. 87 %	Approx. 87 %
Power loss at $V_{out rated}$ , $I_{out rated}$	Approx. 18 W	Approx. 36 W
<b>Control</b>		
Dyn. mains compensation ( $V_{in rated} \pm 15\%$ )	Approx. 0.1 %	Approx. 0.1 %
Dyn. load compensation ( $I_{out}$ : 50/100/50 %)	Approx. +3 % $V_{out}$	Approx. +3% $V_{out}$
Settling time		
• Load step from 50 to 100 %	< 5 ms (typ. 2 ms)	< 5 ms (typ. 2 ms)
• Load step from 100 to 50 %	< 5 ms (typ. 2 ms)	< 5 ms (typ. 2 ms)
<b>Protection and monitoring</b>		
Output overvoltage protection	< 35 V	< 35 V
Current limitation	typ. 5.5 A	typ. 12 A
Short-circuit protection	Choice of stabilized current characteristic approx. 5.5 A or latching shutdown	Choice of stabilized current characteristic approx. 12 A or latching shutdown
RMS sustained short-circuit current	Approx. 5.5 A	Approx. 12 A
Overload/short-circuit indicator	Yellow LED for "overload", red LED for "latching shutdown"	Yellow LED for "overload", red LED for "latching shutdown"
<b>Safety</b>		
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178
Protective class	Class I	Class I
Discharge current	< 3.5 mA (typ. 0.25 mA)	< 3.5 mA (typ. 0.32 mA)
TÜV test	Yes	Yes
CE marking	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E197259	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E197259
FM approval	-	-
Appr. for use in marine vessels	-	-
Degree of protection (EN 60529)	IP20	IP20
<b>EMC</b>		
Interference emission	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	EN 61000-3-2	EN 61000-3-2
Interference immunity	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>		
Ambient temperature range	0 to +60 °C with natural convection	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>		
Connections		
• Mains input L1, L2, L3, PE	One screw-type terminal each for 0.2 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.2 to 2.5 mm <sup>2</sup> single-core/finely stranded
• Output L+	2 screw-type terminals for 0.2 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.2 to 2.5 mm <sup>2</sup>
• Output M	2 screw-type terminals for 0.2 to 2.5 mm <sup>2</sup>	2 screw-type terminals for 0.2 to 2.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	70 x 125 x 125	90 x 125 x 125
Weight approx.	1.2 kg	1.4 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5
<b>Accessories</b>	Buffer module (6EP1961-3BA00) Signalling module (6EP1961-3BA10) Redundancy module (6EP1961-3BA20)	Buffer module (6EP1961-3BA00) Signalling module (6EP1961-3BA10) Redundancy module (6EP1961-3BA20)

# SITOP power · Standard 24 V Three-phase

Output currents 5 A to 40 A

## 20 A

**6EP1 436-3BA00**

Approx. 90 %  
Approx. 53 W

< 1 %  $V_{out}$

Approx.  $\pm 2\%$   $V_{out}$

< 10 ms (typ. 4 ms)  
< 10 ms (typ. 4 ms)

< 35 V  
typ. 23 A

Choice of stabilized current characteristic approx. 23 A or latching shutdown  
Approx. 23 A  
Yellow LED for "overload", red LED for "latching shutdown"

Yes, SELV output voltage  $V_{out}$  acc. to EN 60950 and EN 50178  
Class I  
< 3.5 mA

Yes  
Yes  
Yes, UL listed (UL 508)  
File E197259, CSA (CSA 22.2 No. 14-95)

-  
-  
IP20

EN 55022 Class B  
EN 61000-3-2  
EN 61000-6-2

0 to +60 °C with natural convection  
-25 to +85 °C

Climatic class 3K3 acc. to EN 60721, no condensation

One screw-type terminal each for 0.2 to 4 mm<sup>2</sup> single-core/finely stranded  
2 screw-type terminals for 0.33 to 4 mm<sup>2</sup>  
2 screw-type terminals for 0.33 to 4 mm<sup>2</sup>

160 x 125 x 125  
2 kg  
Snap-mounting on DIN rail  
EN 50022-35x15/7.5

Buffer module (6EP1961-3BA00)  
Signalling module (6EP1961-3BA10)  
Redundancy module (6EP1961-3BA20)

## 40 A

**6EP1 437-3BA00**

Approx. 90 %  
Approx. 106 W

< 1 %  $V_{out}$

Approx.  $\pm 2\%$   $V_{out}$

< 10 ms (typ. 4 ms)  
< 10 ms (typ. 4 ms)

< 35 V  
typ. 46 A

Choice of stabilized current characteristic approx. 46 A or latching shutdown  
Approx. 46 A  
Yellow LED for "overload", red LED for "latching shutdown"

Yes, SELV output voltage  $V_{out}$  acc. to EN 60950 and EN 50178  
Class I  
< 3.5 mA

Yes  
Yes  
Yes, UL listed (UL 508)  
File E197259, CSA (CSA 22.2 No. 14-95)

-  
-  
IP20

EN 55022 Class B  
EN 61000-3-2  
EN 61000-6-2

0 to +60 °C with natural convection  
-25 to +85 °C

Climatic class 3K3 acc. to EN 60721, no condensation

One screw-type terminal each for 0.2 to 4 mm<sup>2</sup> single-core/finely stranded  
2 screw-type terminals for 0.33 to 10 mm<sup>2</sup>  
2 screw-type terminals for 0.33 to 10 mm<sup>2</sup>

240 x 125 x 125  
3.2 kg  
Snap-mounting on DIN rail  
EN 50022-35x15/7.5

Buffer module (6EP1961-3BA00)  
Signalling module (6EP1961-3BA10)  
Redundancy module (6EP1961-3BA20)

# SITOP power · Standard 24 V Three-phase

Output currents 10 A to 40 A

## Overview

## The proven types



## Application

The tried and tested power supply units with three-phase wide-range input for supplying all standard applications in automation engineering.

## Technical specifications

Power supply, type	10 A	20 A
<b>Order No.</b>	<b>6EP1 434-2BA00</b>	<b>6EP1 436-2BA00</b>
<b>Input</b>	Three-phase AC	Three-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>400 to 500 V 3 AC</b> wide-range input	<b>400 to 500 V 3 AC</b> wide-range input
Voltage range	360 to 550 V 3 AC (340 to 360 V for max. 2 s or at max. $0.9 \times I_{out \text{ rated}}$ )	360 to 550 V 3 AC (340 to 360 V for max. 2 s or at max. $0.9 \times I_{out \text{ rated}}$ )
Overvoltage strength	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms
Mains buffering at $I_{out \text{ rated}}$	> 6 ms at $V_{in} = 360 \text{ V}$	> 3 ms at $V_{in} = 360 \text{ V}$
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	0.65 A (at 400 V)	1.2 A (at 400 V)
Inrush current limitation (+25 °C)	< 25 A	< 25 A
$I^2t$	< 1.0 A <sup>2</sup> s	< 1.0 A <sup>2</sup> s
Integrated line-side fuse	none	none
Required fuse protection in mains supply line	3-pole coupled circuit-breaker Char. C up to 25 A (recommendation: 6 A) or motor circuit-breaker 3RV1021-1DA10, setting 3 A	3-pole coupled circuit-breaker Char. C up to 25 A (recommendation: 6 A) or motor circuit-breaker 3RV1021-1DA10, setting 3 A
<b>Output</b>	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>24 V DC</b>	<b>24 V DC</b>
Total tolerance	± 3 %	± 3 %
• Stat. mains compensation		
• Stat. load compensation		
Residual ripple (clock frequency: approx. 50 kHz)	< 150 mV <sub>pp</sub> (typ. 60 mV <sub>pp</sub> )	< 150 mV <sub>pp</sub> (typ. 60 mV <sub>pp</sub> )
Spikes (bandwidth: 20 MHz)	< 240 mV <sub>pp</sub> (typ. 120 mV <sub>pp</sub> )	< 240 mV <sub>pp</sub> (typ. 120 mV <sub>pp</sub> )
Setting range	22.8 to 26.4 V <sup>1)</sup>	22.8 to 26.4 V <sup>1)</sup>
Status display	Green LED for 24 V O.K.	Green LED for 24 V O.K.
Power ON/OFF behavior	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	< 3 s/typ. 40 ms	< 3 s/typ. 40 ms
Rated current $I_{out \text{ rated}}$	<b>10 A</b>	<b>20 A</b>
Current range		
• Up to +45 °C	0 to 10 A	0 to 20 A
• Up to +55 °C	0 to 10 A	0 to 20 A
Dyn. V/I with		
• Starting on short circuit	Constant current approx. 18 A	Constant current approx. 30 A
• Short-circuit in operation	Constant current approx. 18 A	Constant current approx. 30 A
Parallel connection for increased output	Yes, 2 <sup>1)</sup>	Yes, 2 <sup>1)</sup>

Continued on page 7/8.

1) Only permissible with ambient temperature from 0 °C to 45 °C.

## The proven types



The tried and tested power supply units with three-phase wide-range input for supplying all standard applications in automation engineering.

30 A	40 A
<b>6EP1 437-2BA00</b>	<b>6EP1 437-2BA10</b>
Three-phase AC <b>400 to 500 V 3 AC</b> wide-range input 360 to 550 V 3 AC (340 to 360 V for max. 2 s or at max. 0.9 x I <sub>out rated</sub> )	Three-phase AC <b>400 to 500 V 3 AC</b> wide-range input 360 to 550 V 3 AC (340 to 360 V for max. 2 s or at max. 0.9 x I <sub>out rated</sub> )
2.3 x V <sub>in rated</sub> , 1.3 ms > 4.5 ms at V <sub>in</sub> = 360 V 50/60 Hz; 47 to 63 Hz 1.4 A (at 400 V) < 25 A < 1.0 A <sup>2</sup> s none 3-pole coupled circuit-breaker Char. C up to 25 A (recommendation: 6 A) or motor circuit-breaker 3RV1021-1DA10, setting 3 A	2.3 x V <sub>in rated</sub> , 1.3 ms > 3 ms at V <sub>in</sub> = 360 V 50/60 Hz; 47 to 63 Hz 1.9 A (at 400 V) < 25 A < 1.0 A <sup>2</sup> s none 3-pole coupled circuit-breaker Char. C up to 25 A (recommendation: 6 A) or motor circuit-breaker 3RV1021-1DA10, setting 3 A
Stabilized, floating direct voltage <b>24 V DC</b> ± 3 %	Stabilized, floating direct voltage <b>24 V DC</b> ± 3 %
< 150 mV <sub>pp</sub> (typ. 50 mV <sub>pp</sub> ) < 240 mV <sub>pp</sub> (typ. 200 mV <sub>pp</sub> ) 22.8 to 26.4 V <sup>1)</sup> Green LED for 24 V O.K. Small overshoot of V <sub>out</sub> (< 2 V for max. 500 ms)	< 150 mV <sub>pp</sub> (typ. 50 mV <sub>pp</sub> ) < 240 mV <sub>pp</sub> (typ. 200 mV <sub>pp</sub> ) 22.8 to 26.4 V <sup>1)</sup> Green LED for 24 V O.K. Small overshoot of V <sub>out</sub> (< 2 V for max. 500 ms)
< 3 ms/typ. 40 ms <b>30 A</b>	< 3 ms/typ. 40 ms <b>40 A</b>
0 to 30 A 0 to 30 A	0 to 40 A 0 to 40 A
Approx. 60 A for 600 ms Approx. 60 A for 600 ms Yes, 2 <sup>1)</sup>	Approx. 70 A for 600 ms Approx. 70 A for 600 ms Yes, 2 <sup>1)</sup>

Continued on page 7/9.

# SITOP power · Standard 24 V Three-phase

## Output currents 10 A to 40 A

Power supply, type	10 A	20 A
<b>Order No.</b>	<b>6EP1 434-2BA00</b>	<b>6EP1 436-2BA00</b>
<b>Efficiency</b>		
Efficiency at $V_{out rated}$ , $I_{out rated}$	Approx. 89 %	Approx. 89 %
Power loss at $V_{out rated}$ , $I_{out rated}$	Approx. 30 W	Approx. 59 W
<b>Control</b>		
Dyn. mains compensation ( $V_{in rated} \pm 15\%$ )	< 1 % $V_{out}$	< 1 % $V_{out}$
Dyn. load compensation ( $I_{out}$ : 50/100/50 %)	$\pm 2\%$ $V_{out}$	$\pm 2\%$ $V_{out}$
Settling time		
• Load step from 50 to 100 %	< 2 ms	< 2 ms
• Load step from 100 to 50 %	< 2 ms	< 2 ms
<b>Protection and monitoring</b>		
Output overvoltage protection	Yes, acc. to EN 60950	Yes, acc. to EN 60950
Current limitation	typ. 10.5 to 13 A	typ. 21 to 26 A
Short-circuit protection	Stabilized current characteristic down to 0 V	Stabilized current characteristic down to 0 V
RMS sustained short-circuit current	< 20 A	< 30 A
Overload/short-circuit indicator	-	-
<b>Safety</b>		
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950	Yes, SELV output voltage $V_{out}$ acc. to EN 60950
Protective class	Class I	Class I
Discharge current	< 0.35 mA (550 V/60 Hz)	< 0.35 mA (550 V/60 Hz)
TÜV test	Yes; CB scheme	Yes; CB scheme
CE marking	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289
FM approval	-	-
Appr. for use in marine vessels	-	-
Degree of protection (EN 60529)	IP20	IP20
<b>EMC</b>		
Interference emission	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	EN 61000-3-2	EN 61000-3-2
Interference immunity	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>		
Ambient temperature range	0 to +55 °C with natural convection	0 to +55 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>		
Connections		
• Mains input L1, L2, L3, PE	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded
• Output L+	1 screw-type terminal for 0.33 to 10 mm <sup>2</sup>	1 screw-type terminal for 0.33 to 10 mm <sup>2</sup>
• Output M	2 screw-type terminals for 0.33 to 10 mm <sup>2</sup>	2 screw-type terminals for 0.33 to 10 mm <sup>2</sup>
Dimensions (W x H x D) in mm	280 x 125 x 92	280 x 125 x 92
Weight approx.	2 kg	2 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5
<b>Accessories</b>	Mounting bracket 90° (6EP1971-2BA00)	Mounting bracket 90° (6EP1971-2BA00)

# SITOP power · Standard 24 V Three-phase

Output currents 10 A to 40 A

30 A	40 A
<b>6EP1 437-2BA00</b>	<b>6EP1 437-2BA10</b>
Approx. 90 % Approx. 80 W	Approx. 90 % Approx. 107 W
< 1 % $V_{out}$ -4 %, +2 % $V_{out}$	< 1 % $V_{out}$ -4 %, +2 % $V_{out}$
< 3 ms < 3 ms	< 3 ms < 3 ms
Yes, acc. to EN 60950 typ. 31.5 to 39 A	Yes, acc. to EN 60950 typ. 42 to 52 A
Electronic shutdown, automatic restart	Electronic shutdown, automatic restart
< 48 A -	< 62 A -
Yes, SELV output voltage $V_{out}$ acc. to EN 60950 Class I < 0.78 mA (550 V/60 Hz)	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 Class I < 0.78 mA (550 V/60 Hz)
Yes; CB scheme Yes Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289	Yes; CB scheme Yes Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289
- - IP20	- - IP20
EN 55022 Class B EN 61000-3-2 EN 61000-6-2	EN 55022 Class B EN 61000-3-2 EN 61000-6-2
0 to +55 °C with natural convection -25 to +85 °C	0 to +55 °C with natural convection -25 to +85 °C
Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded 1 screw-type terminal for 0.33 to 10 mm <sup>2</sup> 2 screw-type terminals for 0.33 to 10 mm <sup>2</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded 1 screw-type terminal for 0.33 to 10 mm <sup>2</sup> 2 screw-type terminals for 0.33 to 10 mm <sup>2</sup>
280 x 180 x 92 3.6 kg Snap-mounting on DIN rail EN 50022-35x15/7.5	280 x 180 x 92 3.6 kg Snap-mounting on DIN rail EN 50022-35x15/7.5
Mounting bracket 90° (6EP1971-2BA00)	Mounting bracket 90° (6EP1971-2BA00)

7

# SITOP power · Standard 24 V

## Three-phase

Notes

7



# SITOP power · Standard 24 V Additional components

# 8



- 8/2 SITOP modular signalling module
- 8/2 SITOP modular buffer module
- 8/2 SITOP modular redundancy module
- 8/4 SITOP select diagnosis module
- 8/6 Mounting bracket 90°
- 8/7 Mounting adapter for S7 rail and PS-CPU connecting comb
- 8/7 IP65 connector seals
- 8/7 Circular input connectors and AS-Interface coupling module PG




# SITOP power · Standard 24 V

## Additional components

### Overview

#### SITOP modular signalling module



#### SITOP modular buffer module



#### SITOP modular redundancy module



### Application

Using the signalling module in combination with a stabilized SITOP modular power supply unit, signals can be provided on the operating status of the power supply unit, and remote switching ON/OFF of the unit is possible; automatic contacting with the power supply unit.

With brief interruptions in the power supply, the buffer module in combination with a stabilized SITOP modular power supply unit can buffer the load current without an interruption. The buffer module is wired in parallel with the output of the power supply unit.

The redundancy module serves to decouple two stabilized SITOP modular power supplies in parallel mode. If one power supply fails, the 24 V is safely retained.

### Technical specifications

Order No.	6EP1 961-3BA10	6EP1 961-3BA00	6EP1 961-3BA20
<b>Input/output</b>			
Rated input voltage $V_{in \text{ rated}}$	-	Stabilized, floating direct voltage <b>24 V DC</b>	Stabilized, floating direct voltage <b>24 V DC</b>
Input voltage range	-	24 to 28.8 V DC	24 to 28.8 V DC
Control input	Non-isolated input for remote ON/OFF switching of the power supply unit	-	-
Rated output voltage $V_{out \text{ rated}}$	-	$V_{in}$ – approx. 1 V	$V_{in}$ – approx. 0.5 V
Rated current $I_{out \text{ rated}}$	-	40 A	20 A (maximum total current 40 A)
Mains buffering	-	100 ms at 40 A up to 800 ms at 5 A load current	-
Buffer time, max.	-	3 s	-
Parallel connection for increased output	-	Yes, 2	-
<b>Protection and monitoring</b>			
Static current limitation	-	typ. 40 A	-
Short-circuit protection	-	Electronic	-
<b>Displays/messages</b>			
Status display	-	Green LED for supply voltage > 20.5 V	Green LED for "Power supply 1 and Power supply 2 OK"
Signals	Floating relay contacts (changeover contacts, rating 6 A/240 V AC) for "Output voltage OK" and "Power supply availability OK"	-	Floating relay contact (changeover contact, rating 6 A/240 V AC) for "Power supply 1 and Power supply 2 OK", switching threshold adjustable from 20 to 25 V

# SITOP power · Standard 24 V

## Additional components

### Technical specifications (continued)

Order No.	6EP1 961-3BA10	6EP1 961-3BA00	6EP1 961-3BA20
<b>Safety</b>			
Galvanic isolation	Yes, SELV acc. to EN 60950 (relay contacts)	Yes, SELV acc. to EN 60950	Yes, SELV acc. to EN 60950 (relay contact)
Protective class	Class I	Class I	Class I
TÜV test	Yes	Yes	Yes
CE marking	Yes	Yes	Yes
UL/cUL (CSA) approval	Yes, UL listed (UL 508) File E197259, CSA (CSA 22.2 No. 14-95)	Yes, UL listed (UL 508) File E197259, CSA (CSA 22.2 No. 14-95)	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91)
FM approval	-	-	-
Appr. for use in marine vessels	-	-	-
Degree of protection (EN 60529)	IP20	IP20	IP20
<b>EMC</b>			
Interference emission	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>			
Ambient temperature range	0 to +60 °C with natural convection	0 to +60 °C with natural convection	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C	-25 to +85 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>			
Connections	Screw-type terminals for 0.14 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for + and - for 0.5 to 10 mm <sup>2</sup> single-core/finely stranded	Input, output and ground: one screw-type terminal each for 0.33 to 10 mm <sup>2</sup> , single-core/finely stranded; relay contact: one screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> , single-core/finely stranded
Dimensions (W x H x D) in mm	26 x 125 x 116	70 x 125 x 125	70 x 125 x 125
Weight approx.	0.15 kg	1.2 kg	1.0 kg
Mounting	Can be directly snapped onto the side of the basic unit	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5

# SITOP power · Standard 24 V

## Additional components

### Overview

### SITOP select



### Application

The diagnosis module is used together with 24 V power supply units to divide the load current between several branch circuits and to monitor the individual currents. Faults in the individual circuits resulting from an overload or short-circuit are detected and switched off selectively, and other load current paths therefore remain unaffected by the fault. This results in rapid fault diagnostics, and downtimes are minimized.

### Technical specifications

<b>Type</b>	<b>Module 4 x 10 A</b>
<b>Order No.</b>	<b>6EP1 961-2BA00</b>
<b>Input</b>	<b>DC voltage</b>
Rated voltage $V_{in \text{ rated}}$	24 V DC
Voltage range	22 to 30 V
Overvoltage strength	35 V; 100 ms
<b>Output</b>	<b>DC voltage</b>
Rated voltage $V_{out \text{ rated}}$	<b><math>V_{out} - 0.5 \text{ V}</math></b>
Total tolerance/ residual ripple	Corresponding to the input voltage
Number of output channels	4
Rated current	<b>10 A per channel</b>
$I_{out \text{ rated}}$ up to +60 °C	
Setting range	2 to 10 A per channel
Parallel connection of several channels	Not permissible
<b>Efficiency</b>	
Efficiency at $V_{out \text{ rated}}, I_{out \text{ rated}}$	Approx. 97 %
Power loss at $V_{out \text{ rated}}, I_{out \text{ rated}}$	Approx. 30 W
<b>Switch-off characteristic per channel</b>	
Overcurrent	$I_{out} = 1.0$ to $1.3 \times$ set value, switch-off after approx. 5 s
Current limitation	$I_{out} = 1.35 \times$ set value, switch-off after approx. 50 to 100 ms
Immediate switch-off	$I_{out} >$ set value and $V_{in} < 20 \text{ V}$
Reset	Using keys on module
<b>Protection and monitoring</b>	
Line protection	Electronic; additionally possible via accessible FK2 blade-type fuse (equipped when delivered with 15 A fuse) per channel
Status displays	Two-color LED per channel, green for output switched through, red for output switched off
Signaling contact	Common signal contact (NO contact)
<b>Safety</b>	
Protective class	Class III
Degree of protection (EN 60529)	IP20
TÜV test	Yes
CE marking	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E197259; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273
<b>EMC</b>	
Interference emission	EN 55022 Class B
Interference immunity	EN 61000-6-2
<b>Operating specifications</b>	
Ambient temperature range	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation

### Technical specifications (continued)

Type	Module 4 x 10 A
Order No.	6EP1 961-2BA00


#### Mechanical specifications

##### Connections

- Input +24 2 screw-type terminals for 0.33 to 10 mm<sup>2</sup>
- Input 0 V 2 screw-type terminals for 0.22 to 4 mm<sup>2</sup>
- Outputs 1 to 4 1 screw-type terminal per channel for 0.22 to 4 mm<sup>2</sup>
- Signalling contact 2 screw-type terminals for 0.22 to 4 mm<sup>2</sup>


Dimensions (W x H x D) in mm	72 x 90 x 90
Weight	0.4 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5

### Characteristic curves

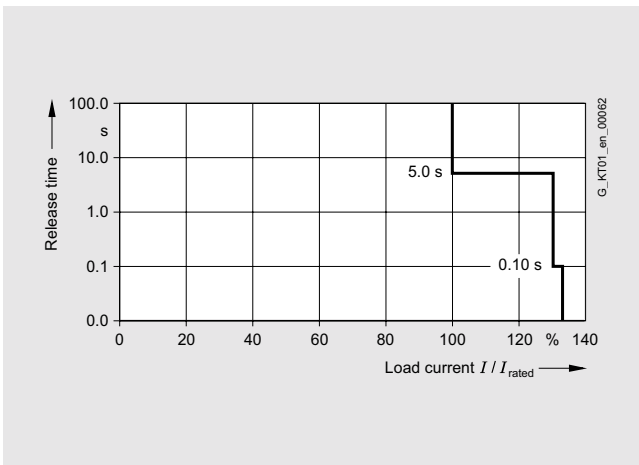

Switch-off characteristic

### Schematics

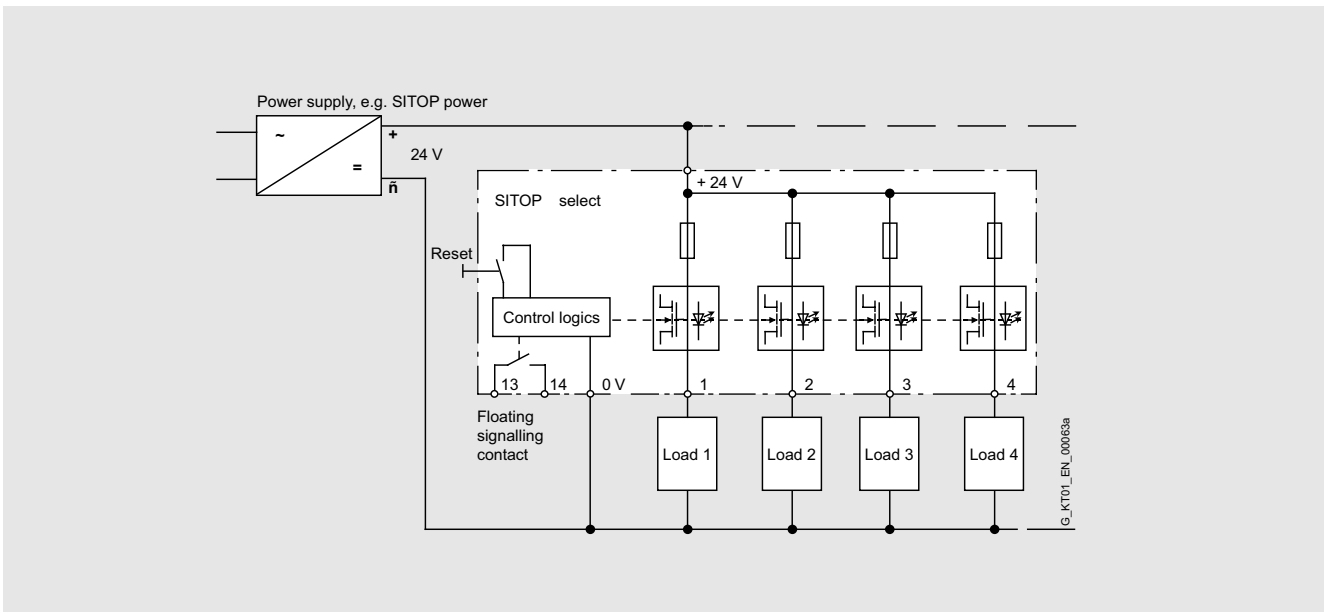


Basic circuit

# SITOP power · Standard 24 V

## Additional components

### Overview

### Mounting bracket



### Application

Combination of a SITOP power supply unit with a 90° mounting bracket results in a minimum surface requirement on the rear panel of the switchgear cabinet (the width of the power supply unit becomes the depth, the depth becomes the width). The mounting bracket is suitable for switchgear cabinets with a depth of 240 mm or 320 mm or more.

### Technical specifications

Mounting bracket	For depth 240 mm	For depth 320 mm
<b>Order No.</b>	<b>6EP1 971-1AA01</b>	<b>6EP1 971-2BA00</b>
Dimensions (W x H x D) in mm	50 x 159 x 236	100 x 150 x 320
Sheet plate thickness	2 mm	1.5 mm
Connected mounting rail	DIN rail EN 50022-35x7.5	DIN rail EN 50022-35x15
Weight approx.	0.9 kg	0.9 kg
Mounting	Can be screwed on level surface (keyhole mounting with M5 screws, drill hole distance 147.5 mm height)	Can be screwed on level surface (keyhole mounting with M6 screws, drill hole distance 90 mm height, 50 mm to the side)
Supplied accessories	Two M5 combi screws and two M5 self-tapping screws	Four M6 combi screws
Suitable for	SITOP 24 V/3.5 A (6EP1 332-1SH31) SITOP 24 V/5 A (6EP1 333-1AL12) SITOP 24 V/10 A (6EP1 334-1AL12) SITOP DC UPS module 40 A (6EP1 931-2FC01)	SITOP 24 V/10 A (6EP1 434-2BA00) SITOP 24 V/20 A (6EP1 336-2BA00, 6EP1 335-3BA00, 6EP1 436-2BA00, 6EP1 436-3BA00, 6EP1 457-3BA00, 6EP1 536-2AA00) SITOP 24 V/30 A (6EP1 437-2BA00) SITOP 24 V/40 A (6EP1 437-2BA10, 6EP1 337-3BA00, 6EP1 437-3BA00)

### Mounting adapter for S7 rail and PS-CPU connecting comb

The single-phase SITOP power supply units 24 V/2 A (6ES7 307-1BA00-0AA0, 6ES7 305-1BA80-0AA0), 24 V/5 A (6ES7 307-1EA00-0AA0, 6ES7 307-1EA80-0AA0) and 24 V/10 A (6ES7 307-1KA01-0AA0) are special mechanical versions for SIMATIC S7-300.

They can be mounted on an S7 rail, and the connection to the new CPUs or the compact CPUs of the S7-300 can be established without problem using a supplied connecting comb.

Power supply units of same design without connecting comb, but with a supplied mounting adapter for DIN rail EN 50022-35x15, are available with the Order Nos. 6EP1 331-1SL11 (24 V/2 A), 6EP1 333-1SL11 (24 V/5 A) and 6EP1 334-1SL12 (24 V/10 A).

A connecting comb for older CPUs with product phase-out since 2003 as well as the mounting adapter are available as individual accessories.

#### Selection and Ordering Data

<b>PS-CPU connecting comb</b> (spare part for CPUs 313, 314, 315, 315/316/318-2 DP, IM153)	<b>6ES7 390-7BA00-0AA0</b>
<b>Mounting adapter</b> for DIN rail EN 50022-35x15	<b>6ES7 390-6BA00-0AA0</b>

### IP65 connector seals

The single-phase SITOP power supply unit 24 V/10 A in IP65 degree of protection (6EP1 334-2CA00) has a design and functionality which are optimally adapted to the ET 200X distributed I/O system.

Thanks to integral plug-in connectors, it can be flush-mounted with the modules without any special wiring overhead.

If the power supply unit is operated outside the ET 200X system as a stand-alone power supply unit in IP65 degree of protection, connector seals are required to seal the integral plug-in connectors.

#### Selection and Ordering Data

<b>IP65 connector seal</b> for power supply unit 6EP1 334-2CA00	<b>6EP1 971-2CA00</b>
---	-----------------------

### Circular input connectors and AS interface coupling module PG

A 6-pole circular connector with socket inset is required for the ASi power supply 30 V/2.4 A in IP65 degree of protection (6EP1 632-1AL01) for connection of the input side.

The connection of the ASi power supply to the ASi network is made using the coupling module PG.

#### Selection and Ordering Data

<b>6-pole circular input connector</b> with socket inset	<b>6ES5 760-2CA11</b>
<b>AS interface coupling module</b> PG	<b>3RG9 220-0AA00</b>

# SITOP power · Standard 24 V

## Additional components

Notes

8



# SITOP power · Standard 24 V Uninterruptible power supplies

# 9



<b>DC UPS</b>	
9/2	Overview
9/2	DC UPS software
9/3	DC UPS module 6 A and 15 A
9/11	DC UPS module 40 A
9/14	Battery module 1.2 Ah
9/15	Battery module 2.5 Ah
9/16	Battery module 3.2 Ah
9/17	Battery module 7 Ah
9/18	Battery module 12 Ah



# SITOP power · Standard 24 V Uninterruptible power supplies

## DC UPS

### Overview

By combining a DC UPS module with at least one 24 V battery module and a SITOP power supply unit, longer power failures can be bridged without any interruption.

This combination is used, for example, in machine tool manufacture, in the textile industry, with all types of production lines and filling systems, and in conjunction with 24 V industrial PCs. The negative effects which frequently result from power failures can thus be prevented.

For nonstop use in the event of power failures, Siemens offers the uninterruptible power supplies

- DC UPS 6 A
- DC UPS 15 A
- DC UPS 40 A

as well as the battery modules

- 1.2 Ah
- 3.2 Ah
- 7 Ah
- 12 Ah
- 2.5 Ah (high-temperature battery).

### Selection table for battery modules with power failure buffer times

Load current	Battery module 1.2 Ah (6EP1935-6MC01)	Battery module 3.2 Ah (6EP1935-6MD11)	Battery module 7 Ah (6EP1935-6ME21)	Battery module 12 Ah (6EP1935-6MF01)	Battery module 2.5 Ah (6EP1935-6MD31)
1 A	30 min	2.5 h	6 h	10 h	2 h
2 A	11 min	45 min	2.5 h	4 h	45 min
4 A	2 min	20 min	45 min	2.5 h	20 min
6 A	1 min	10 min	30 min	1 h	13 min
8 A	-	4 min	20 min	40 min	9 min
10 A	-	1.5 min	15 min	30 min	7 min
12 A	-	1 min	10 min	25 min	5.5 min
14 A	-	50 s	8 min	20 min	4.5 min
16 A	-	40 s	6 min	15 min	4 min
20 A	-	-	2 min	11 min	-


#### Note:

- The power failure buffer times are based on the discharge period of the completely charged battery module down to a battery voltage of 21 V; ambient temperature 25 °C.
- With the DC UPS 40 A module, high electronically limited peak currents (120 A for approx. 12 ms, up to 40 A for several minutes depending on the battery capacity) are automatically delivered in the event of increased load current requirements (e.g. when switching on incandescent lamps, contactors with DC autotransformer winding, DC motors, DC/DC converters, electronic modules with high input capacitance). To achieve this, at least two battery modules of 7 Ah or more must be connected in parallel.
- Following a power failure, the battery module is automatically disconnected from the loads electronically and rapidly recharged at 0.2/0.4 A (DC UPS 6 A module), at 0.35/0.7 A (DC UPS 15 A module) or at 2 A (DC UPS 40 A module) (V/I characteristic with 27 V or 27.3 V end-of-charge voltage).

### DC UPS software

The DC UPS 6 A and 15 A modules are optionally available with a serial interface or USB interface. All relevant messages concerning the status of the DC UPS can then be sent to a PC (e.g. SIMATIC PC). The SITOP DC UPS software, with which the signals sent from the DC UPS module can be processed further on the PC, is very easy to use. In monitoring mode, the statuses of the DC UPS module are visualized on the PC. The safe shutdown in the event of a power failure and the automatic restart of the PC are supported. It is also possible to freely define the responses to the various operating states of the DC UPS module, permitting extremely flexible incorporation into many different applications.

The software executes under the WinNT 4.0, Win2000 and WinXP operating systems. It is available as freeware on the SITOP Internet site for free downloading.

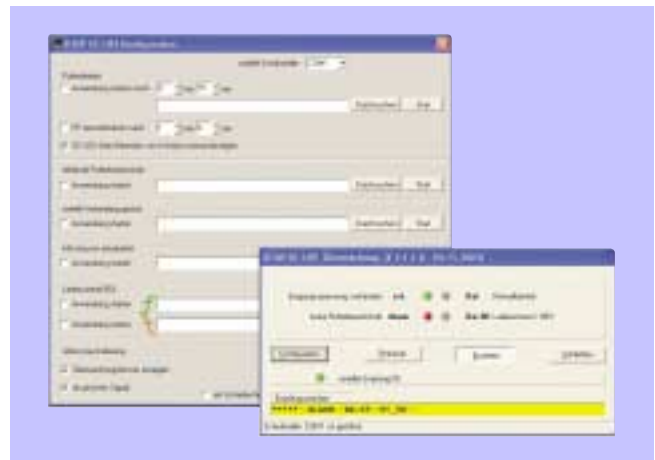

Monitoring and configuration windows of the SITOP UPS software

# SITOP power · Standard 24 V Uninterruptible power supplies


DC UPS module 6 A and 15 A

## Overview

- Compact design, only 50 mm wide
- Simple DIN rail mounting
- Absolutely interruption-free buffering of power failures through immediately electronic connection of the batteries as soon as the DC UPS input voltage drops below the value set using DIP switches
- High safety and availability through monitoring of operational readiness, battery supply line, battery aging (message "Battery replacement necessary") and battery charge (message "Battery charge >85%")
- Support of automatic restart of industrial PCs through selectable switch-off response
- Optionally with serial or USB interface.  
SW tool as download at <http://www.siemens.de/sitop>  
executes under WinNT4.0, Win2000 and WinXP.




## Integration

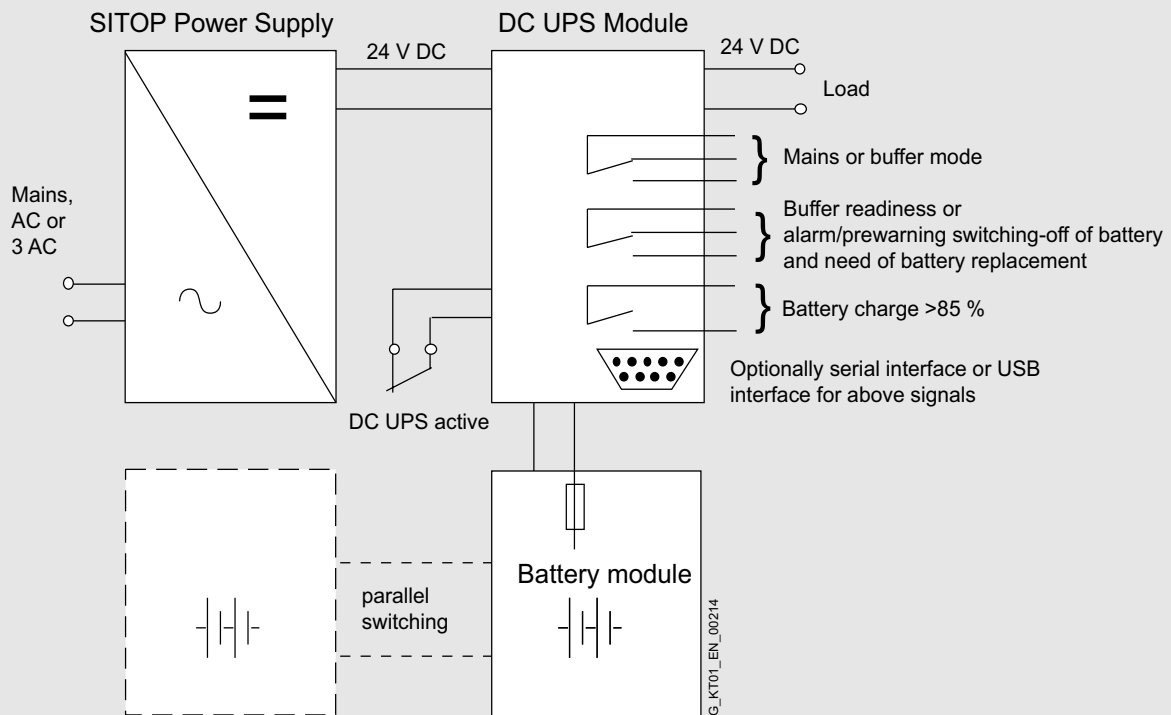

# SITOP power · Standard 24 V Uninterruptible power supplies

## DC UPS module 6 A and 15 A

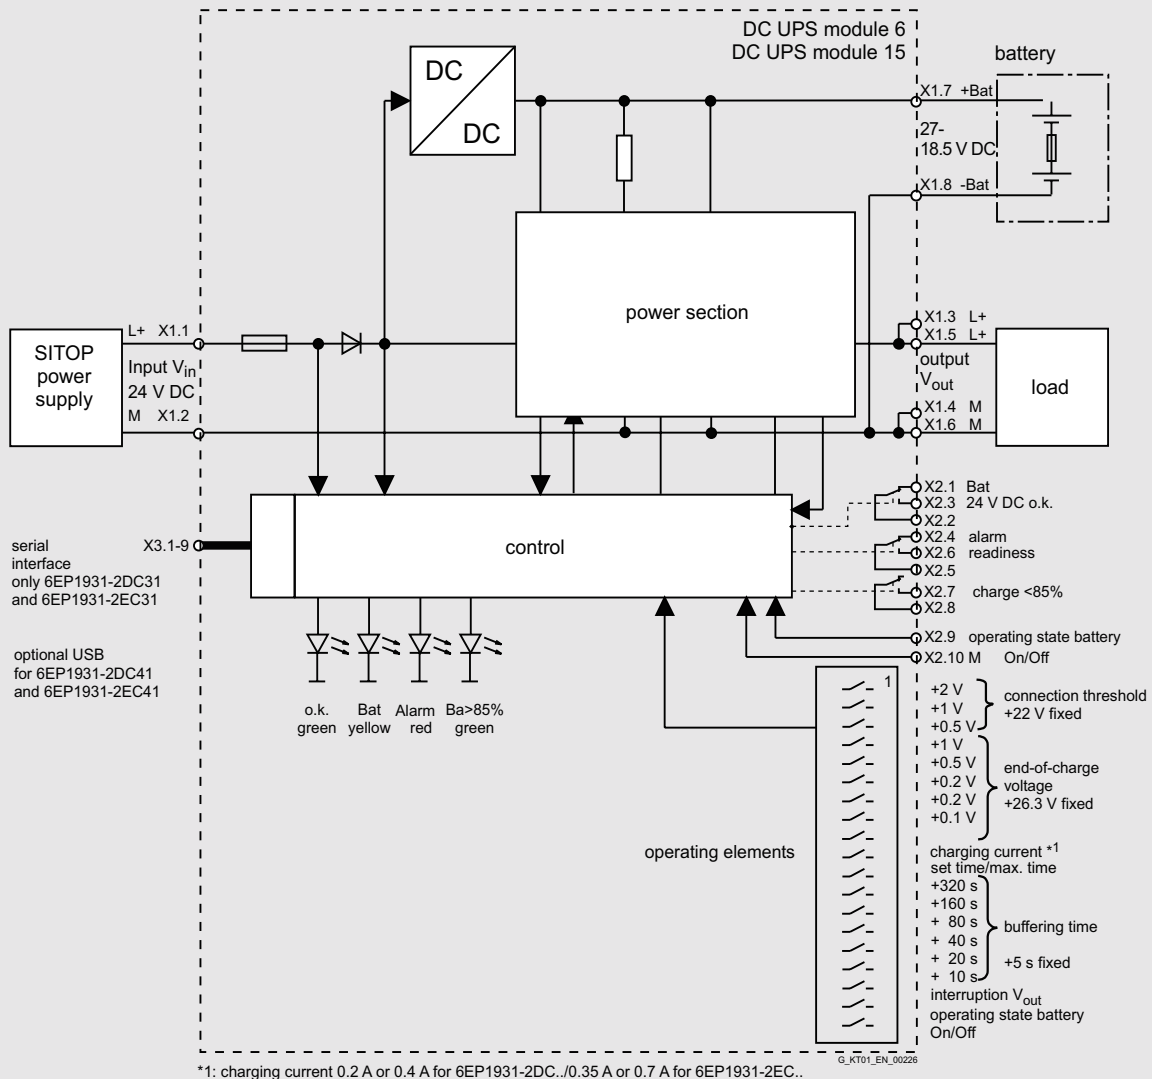

### Function

The following timing diagrams show the characteristic of the input and output voltages at the terminals of the DC UPS module as well as the signal characteristic of the signals (relays) and the remote signal (interface) as examples.

#### "Long" power failure with DC UPS without serial or USB interface (Fig. 9/1)

Power recovery only following expiry of buffer time  $t_p$  ( $t_3$  after  $t_4$ ):

If the input voltage at the DC UPS module fails (time  $t_1$ ), the battery "Bat" immediately takes over the DC supply, and the output voltage  $V_{out}$  is therefore retained completely without interruption.

The floating changeover contact "OK/Bat" switches to its deenergized position "Bat".

At the time  $t_1$ , the buffer time  $t_p$  set on the DIP switches is started automatically.

The fact that the DIP switch is set to "Interruption output  $V_{out}$ " has no effect in this example because the input voltage returns at time  $t_3$  only after the set buffer time (time  $t_4$ ) has expired.

#### "Short" power failure with DC UPS without serial or USB interface (Fig. 9/2)

Power recovery prior to expiry of buffer time  $t_p$  ( $t_3$  before  $t_4$ ):

If the input voltage at the DC UPS module fails (time  $t_1$ ), the battery "Bat" immediately takes over the DC supply, and the output voltage  $V_{out}$  is therefore retained completely without interruption.

The floating changeover contact "OK/Bat" switches to its deenergized position "Bat".

At the time  $t_1$ , the buffer time  $t_p$  set on the DIP switches is started automatically.

With the selected DIP switch position "Interruption output  $V_{out}$ ", the output voltage  $V_{out}$  is automatically interrupted for 5 seconds following expiry of the set buffer time  $t_p$  (time  $t_4$ ).

The battery has already been disconnected because the input voltage has returned at the time  $t_3$ .

If the DIP switch is not set to "Interruption output  $V_{out}$ ", there is no interruption in this example because the input voltage has already returned at time  $t_3$  prior to expiry of the set buffer time (time  $t_4$ ).

Buffer time (time  $t_4$ ) automatically interrupted for 5 s, and battery disconnected from the output at the same time which had not yet been disconnected because the input voltage was missing.

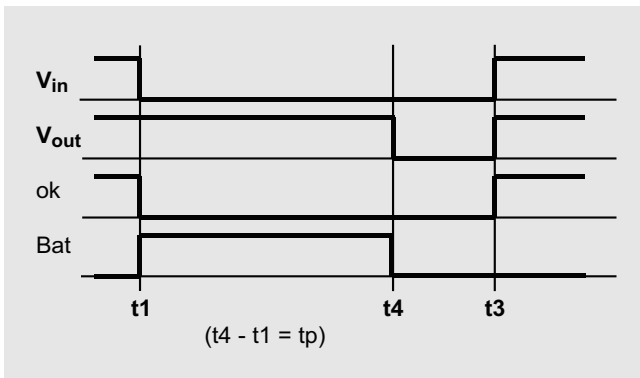


Fig. 9/1 "Long power failure"

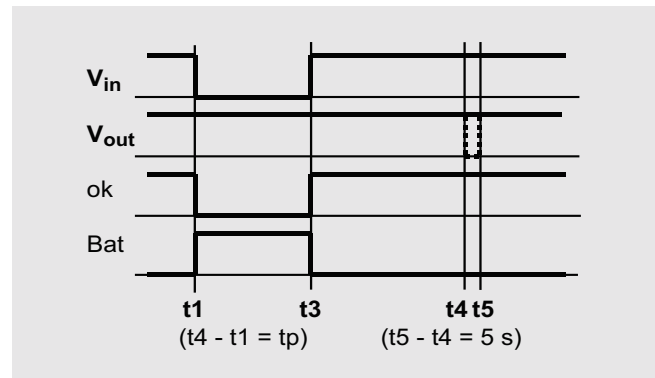


Fig. 9/2 "Short power failure"

DC UPS without serial or USB interface (6EP1931-2DC21/ -2EC21)

DIP switch settings on device: buffer time  $t_p$  (from 5 to 635 s with bottom row No. 2 to 7)/  
/t = following setting (with bottom row No. 1 to left) / = with setting interruption  $V_{out}$   
(with bottom row No. 8 to left)

#### Legend:

$V_{in}$ : input voltage at terminals X1.1 – X1.2  
 $V_{out}$ : output voltage at terminals X1.3 – X1.4 and X1.5 - X1.6  
 ok: Signal for input voltage  $V_{in}$  OK or above the set battery connection threshold  
 Bat: Signal for battery mode (batteries connected to the output, batteries supply the load)  
 Remote: Signal for remote timer start with signal level = 0 at pin 7 of the 9-pin serial interface (pin 7 is normally the positive power supply of the interface)

t1: Input voltage  $V_{in}$  missing or falls below the set connection threshold  
 t2: Buffer time set on the DIP switches is started by a remote timer start (signal level = 0)  
 t3: Input voltage  $V_{in}$  is above the set connection threshold  
 t4: End of set buffer time (output is switched off and/or battery disconnected)  
 t5: Output is connected again 5 sec. after switch-off  
 $t_p$ : Buffer time set on the DIP switches (bottom row No. 2 to 7)

# SITOP power · Standard 24 V Uninterruptible power supplies

## DC UPS module 6 A and 15 A

### Function (continued)

#### "Long" power failure with DC UPS with serial or USB interface (Fig. 9/3)

Power recovery only following expiry of buffer time  $t_p$  ( $t_3$  after  $t_4$ ):

If the input voltage at the DC UPS module fails (time  $t_1$ ), the battery "Bat" immediately takes over the DC supply, and the output voltage  $V_{out}$  is therefore retained completely without interruption.

The floating changeover contact "OK/Bat" switches to its deenergized position "Bat".

At the user-selectable time  $t_2$ , the buffer time  $t_p$  set on the DIP switches is started by means of the signal "Remote timer start" (signal level = 0 at pin 7 of the 9-pin serial interface).

The fact that the DIP switch is set to "Interruption output  $V_{out}$ " has no effect in this example because the input voltage returns at time  $t_3$  after the set buffer time (time  $t_4$ ) has expired.

Note: Without a remote signal level = 0 with the set duration  $t = \text{max.}$ , there is no interruption in the output voltage here because the set buffer time is not started (or only interrupted if the exhaustive discharge protection disconnects the battery and the input voltage has not returned by then).

#### "Short" power failure with DC UPS with serial or USB interface (Fig. 9/4)

Power recovery prior to expiry of buffer time  $t_p$  ( $t_3$  before  $t_4$ ):

If the input voltage at the DC UPS module fails (time  $t_1$ ), the battery "Bat" immediately takes over the DC supply, and the output voltage  $V_{out}$  is therefore retained completely without interruption.

The floating changeover contact "OK/Bat" switches to its deenergized position "Bat".

At the user-selectable time  $t_2$ , the buffer time  $t_p$  set on the DIP switches is started by means of the signal "Remote timer start" (signal level = 0 at pin 7 of the 9-pin serial interface following previous signal timing according to Instruction Manual).

With the selected DIP switch position "Interruption output  $V_{out}$ ", the output voltage  $V_{out}$  is automatically interrupted for 5 seconds following expiry of the set buffer time  $t_p$  (time  $t_4$ ).

The battery has already been disconnected because the input voltage has returned at the time  $t_3$ .

The output voltage interruption of  $V_{out}$  for 5 s permits an automatic restart for many industrial PCs, even if the mains voltage (or the input voltage  $V_{in}$  on the DC UPS module) returns during shutting-down of the PC, as in this example.

Note: Without a remote signal level = 0 with setting  $t = \text{max.}$  duration, there is no interruption in the output voltage here because the set buffer time is not started.

9

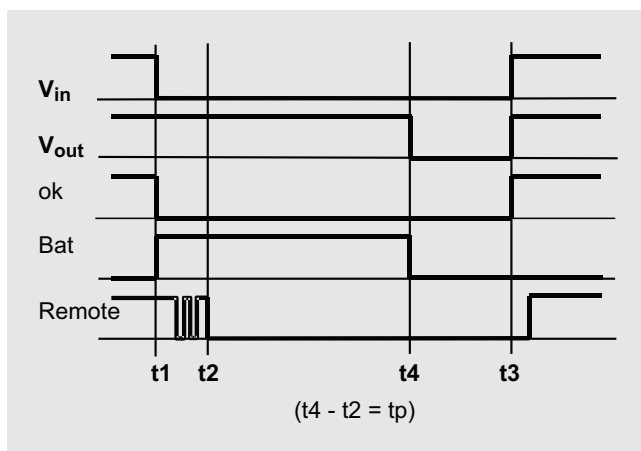


Fig. 9/3 "Long power failure"

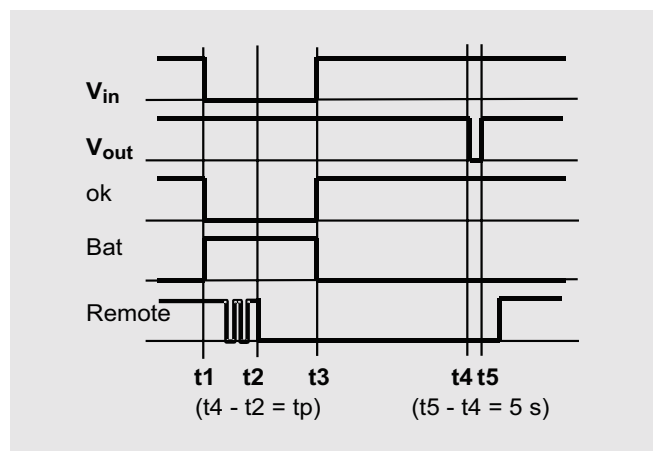


Fig. 9/4 "Short power failure"

DC UPS with serial or USB interface (6EP1931-2DC31/-2DC41/-2EC31/-2EC41)

DIP switch settings on device: buffer time  $t_p$  (from 5 to 635 s with bottom row No. 2 to 7)/  
 $t = \text{max.}$  time (with bottom row No. 1 to right)/interruption  $V_{out}$  (with bottom row No. 8 to left)

#### Legend:

$V_{in}$ : input voltage at terminals X1.1 – X1.2  
 $V_{out}$ : output voltage at terminals X1.3 – X1.4 and X1.5 - X1.6  
 ok: Signal for input voltage  $V_{in}$  OK or above the set battery connection threshold  
 Bat: Signal for battery mode (batteries connected to the output, batteries supply the load)  
 Remote: Signal for remote timer start with signal level = 0 at pin 7 of the 9-pin serial interface (pin 7 is normally the positive power supply of the interface)

$t_1$ : Input voltage  $V_{in}$  missing or falls below the set connection threshold  
 $t_2$ : Buffer time set on the DIP switches is started by a remote timer start (signal level = 0)  
 $t_3$ : Input voltage  $V_{in}$  is above the set connection threshold  
 $t_4$ : End of set buffer time (output is switched off and/or battery disconnected)  
 $t_5$ : Output is connected again 5 sec. after switch-off  
 $t_p$ : Buffer time set on the DIP switches (bottom row No. 2 to 7)

### Technical specifications

DC UPS module 6	
<b>Order No.</b>	<b>6EP1 931-2DC21</b> <b>6EP1 931-2DC31</b> (with serial interface) <b>6EP1 931-2DC41</b> (with USB interface)
<b>Input L+/ M with normal mode</b>	Stabilized direct voltage <b>24 V DC</b> 22 to 29 V DC 22.5 V DC ± 0.1 V (default setting), <b>adjustable in range from 22 to 25.5 V DC</b> (in intervals of 0.5 V)
Rated voltage $V_{in\ rated}$ <sup>1)</sup>	24 V DC
Voltage range	22 to 29 V DC
Connection threshold for battery	22.5 V DC ± 0.1 V (default setting), <b>adjustable in range from 22 to 25.5 V DC</b> (in intervals of 0.5 V)
Rated current $I_{in\ rated}$	6 A + approx. 0.6 A with empty battery
<b>Mains buffering</b>	
Mains buffering or buffer time	dependent on connected battery and load current: • With 3.2 Ah battery module (6EP1935-6MD11) at +25 °C: approx. 10 min at 6 A; 20 min at 4 A; 45 min at 2 A • With 7 Ah battery module (6EP1935-6ME21) at +25 °C: approx. 30 min at 6 A; 45 min at 4 A; 150 min at 2 A
On/off control circuit	External floating NO contact required (load max. 15 V DC/max. 10 mA). With the control circuit open, the battery is disconnected from the output L+, and the mains buffering is therefore canceled.
Buffer time	<b>Adjustable</b> using DIP switches to maximum buffer time until forced switch-off by exhaustive discharge protection (at approx. 19 V) or to timed buffering <b>from 5 to 635 seconds</b> (in intervals of 10 s)
<b>Output L+/ M with normal mode</b>	
Rated voltage $V_{out\ rated}$	<b>24 V DC</b> (output voltage of SITOP power supply unit)
Voltage range	Input voltage $V_{in}$ less approx. 0.5 V DC
Output current $I_{out}$	<b>0 to 6 A</b>
Dynamic current with overload	Electronic current limitation to 1.05 to 1.4 × $I_{out\ rated}$ for approx. 80 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts)
Dynamic current with short-circuit	Electronic current limitation to 1.5 to 3 × $I_{out\ rated}$ for approx. 20 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts)
<b>Output L+/ M with battery mode</b>	
Rated voltage $V_{out\ rated}$	<b>24 V DC</b> (from battery module)
Voltage range, approx.	27 to 19 V DC; 27 V at no load, 25 V at $I_{out} = 0.05 \times C \times 1/h$ or 24 V at $I_{out} = 1 \times C \times 1/h$ or 23 V at $I_{out} = 2 \times C \times 1/h$ (C = total connected battery capacity in Ah), 19 V switch-off threshold for exhaustive discharge protection
Output current $I_{out}$	<b>0 to 6 A</b> (permanently reliable)
Dynamic current with overload	Electronic current limitation to 1.05 to 1.4 × $I_{out\ rated}$ for approx. 80 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts)
Dynamic current with short-circuit	Electronic current limitation to 1.5 to 3 × $I_{out\ rated}$ for approx. 20 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts)
<b>Output +Bat / -Bat with normal mode</b>	
<b>I-V charging characteristic</b> (first constant current I, then constant voltage V)	
End-of-charge voltage V	27.0 V DC ± 0.1 V (default setting), <b>adjustable in range from 26.3 to 29.3 V</b> (in intervals of 0.1 V)
Charging current I	Approx. 0.4 A (default setting), <b>adjustable to 0.2 A or 0.4 A</b> (charging is carried out with the on/off circuit closed or open)
<b>Efficiency / power loss</b>	
At $V_{out\ rated}$ , $I_{out\ rated}$ approx.	95 %/7 W
With battery operation, approx.	94.5 %/8 W
<b>Protection and monitoring</b>	
Polarity reversal protection	Against input voltage and batteries with reversed polarity
Overload protection	Electronic current limitation to 1.05 to 1.4 × $I_{out\ rated}$ for approx. 80 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts)
Short-circuit protection	Electronic current limitation to 1.5 to 3 × $I_{out\ rated}$ for approx. 20 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts). Internal, non-accessible 16 A fuse
Exhaustive discharge protection	Automatic switch-off at battery voltage below approx. 19 V
Monitoring "Wire breakage, battery circuit"	Alarm signal if battery circuit is not closed or if it opens during operation (cyclic test approx. every 20 s)
Monitoring "Battery replacement necessary"	Alarm signal flashing at approx. 0.25 Hz (approx. 2 s alarm, approx. 2 s no alarm, approx. 2 s alarm etc.) Check every 4 hours if no buffer mode or switch-off has taken place within 4 hours
Monitoring "Battery charge > 85 %"	Indication whether batteries are charged to at least 85 % of the rated capacity

1) All SITOP 24 V DC power supply units are permissible without limitation.

# SITOP power · Standard 24 V

## Uninterruptible power supplies

### DC UPS module 6 A

#### Technical specifications (continued)

DC UPS module 6	
<b>Order No.</b>	<b>6EP1 931-2DC21</b> <b>6EP1 931-2DC31</b> (with serial interface) <b>6EP1 931-2DC41</b> (with USB interface)
<b>Signalling</b> <sup>1)</sup>	
Normal mode	Green LED (OK) and floating changeover contact "24 V DC OK/Bat" to position "24 V DC OK" <sup>2)</sup>
Buffer or battery mode (battery supplies load on its own, or in addition to PS in event of overload)	Yellow LED (Bat) and floating changeover contact "24 V DC OK/Bat" to position "Bat" (= de-energized position)
Alarm (buffer readiness missing or pre-warning at < 20.4 V battery voltage)	Red LED (Alarm) and floating changeover contact to position "Alarm" (= de-energized position). Causes for absence of buffer readiness during normal mode could be: Operating status Off or open on/off control circuit, battery module not connected, battery faulty or with reversed polarity (battery voltage < 18.5 V) or wire breakage between battery and UPS module. Scanning and thus updating of the signal every 20 s. Causes for absence of buffer readiness during buffer mode could be: Battery voltage has fallen below 20.4 V DC (= prewarning prior to switching-off by exhaustive discharge protection) as well as switching-off of battery because of overload, short-circuit, exhaustive discharge protection or expired buffer time. The Red LED then goes off.
"Battery replacement necessary"	Red LED (Alarm) flashes at 0.25 Hz and floating changeover contact (Alarm) switches at approx. 0.25 Hz
"Battery charge > 85 %"	Green LED (Bat > 85 %) and floating NO contact closed (de-energized position = open)
<b>Optional interface and software</b>	
Serial interface	Only with <b>6EP1 931-2DC31</b> Output of all signals, and receipt of signal "Remote timer start". Techn. design: PC-compatible. 8N1 send and receive, 9600 baud, 8 data bits, 1 stop bit, no parity bit. Required connection to PC: 1 : 1 continuous 9-pole SUB D extension cable (male/female), only pin 2 (RXD), pin 3 (TDX) and pin 7 (RTS) are required.
USB interface	Only with <b>6EP1 931-2DC41</b> Output of all signals, and receipt of signal "Remote timer start". Techn. design: Specification 2.0 with full speed, i.e. 2 Mbit/s. Powered by DC UPS with +5 V ("self powered"). Required connection to PC: Commercially available 4-core shielded cable, 90 Ohm, max. 5 m, USB series "A" connector to PC and USB series "B" connector to DC UPS
Software	A software tool (executes under WinNT4.0, Win 2000 and WinXP) for reading and processing the signals is available on the Internet at <a href="http://www.siemens.de/sitop">http://www.siemens.de/sitop</a> as a download. Further information on the interface can also be found there.
<b>Control signals</b>	
On/off control signal	By opening the control circuit (or using DIP switch on device), the buffer mode is terminated, or the battery is disconnected from the output. All other functions are retained.
"Remote timer start" via serial interface or USB	Starts the mains buffering for the set buffer time
<b>Safety</b>	
Galvanic isolation primary/secondary	No
Protective class	Class III (ext. circuit and power supply unit: SELV voltage acc. to EN 60950 is required)
<b>EMC</b>	
Interference emission	RI suppression acc. to EN 55022, limit characteristic B
Interference immunity	Interference immunity acc. to EN 61000-6-2
<b>Ambient conditions</b>	
Ambient temperature during operation	0 to +60 °C with natural convection
Transportation and storage temperature	-40 to +70 °C
Degree of protection (EN 60529)	IP20
Humidity rating	Conditions of use acc. to EN 60721, climatic class 3K3 (relative humidity 5 % to 85 % and absolute humidity 1 g/m <sup>3</sup> to 25 g/m <sup>3</sup> ; no condensation)
<b>Approvals</b>	
CE	CE conformity acc. to 98/336 EEC and 73/23 EEC
UL / cUL	UL 508 / CSA C22.2, File E197259
<b>Mechanical specifications</b>	
Connections for 24 V DC input	2 screw-type terminals for 1 to 4 mm <sup>2</sup> /17 to 11 AWG
Connections for 24 V DC output	4 screw-type terminals for 1 to 4 mm <sup>2</sup> /17 to 11 AWG
Connections for 24 V DC battery module	2 screw-type terminals for 1 to 4 mm <sup>2</sup> /17 to 11 AWG
Connections for control circuit and signals	10 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> /20 to 13 AWG
Dimensions (W x H x D) in mm	50 x 125 x approx. 125
Required clearance	50 mm above and 50 mm below the device
Weight	Approx. 0.4 kg (with serial or USB interface: approx. 0.45 kg)
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5

1) Permissible contact rating: 60 V DC/1 A or 30 V AC/1 A.

2) "24 V DC OK" means: Voltage of power supply unit is greater than the battery connection threshold set on the DC UPS module 6.

### Technical specifications

DC UPS module 15	
<b>Order No.</b>	<b>6EP1 931-2EC21</b> <b>6EP1 931-2EC31</b> (with serial interface) <b>6EP1 931-2EC41</b> (with USB interface)
<b>Input L+/ M with normal mode</b>	Stabilized direct voltage
Rated voltage $V_{in\ rated}^{1)}$	<b>24 V DC</b>
Voltage range	22 to 29 V DC
Connection threshold for battery	22.5 V DC $\pm$ 0.1 V (default setting), <b>adjustable in range from 22 to 25.5 V DC</b> (in intervals of 0.5 V)
Rated current $I_{in\ rated}$	15 A + approx. 1 A with empty battery
<b>Mains buffering</b>	
Mains buffering or buffer time	Dependent on connected battery and load current: <ul style="list-style-type: none"> <li>• With 3.2 Ah battery module (6EP1935-6MD11) at +25 °C: approx. 45 s at 15 A; 1.5 min at 10 A; 13 min at 5 A</li> <li>• With 7 Ah battery module (6EP1935-6ME21) at +25 °C: approx. 7 min at 15 A; 15 min at 10 A; 38 min at 5 A</li> </ul>
On/off control circuit	External floating NO contact required (load max. 15 V DC/max. 10 mA). With the control circuit open, the battery is disconnected from the output L+, and the mains buffering is therefore canceled.
Buffer time	<b>Adjustable</b> using DIP switches to maximum buffer time until forced switch-off by exhaustive discharge protection (at approx. 19 V) or to timed buffering <b>from 5 to 635 seconds</b> (in intervals of 10 s)
<b>Output L+/ M with normal mode</b>	
Rated voltage $V_{out\ rated}$	<b>24 V DC</b> (output voltage of SITOP power supply unit)
Voltage range	Input voltage $V_{in}$ less approx. 0.5 V DC
Output current $I_{out}$	<b>0 to 15 A</b>
Dynamic current with overload	Electronic current limitation to 1.05 to 1.4 x $I_{out\ rated}$ for approx. 80 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts)
Dynamic current with short-circuit	Electronic current limitation to 1.5 to 3 x $I_{out\ rated}$ for approx. 20 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts)
<b>Output L+/ M with battery mode</b>	
Rated voltage $V_{out\ rated}$	<b>24 V DC</b> (from battery module)
Voltage range, approx.	27 to 19 V DC; 27 V at no load, 25 V at $I_{out} = 0.05 \times C \times 1/h$ or 24 V at $I_{out} = 1 \times C \times 1/h$ or 23 V at $I_{out} = 2 \times C \times 1/h$ (C = total connected battery capacity in Ah), 19 V switch-off threshold for exhaustive discharge protection
Output current $I_{out}$	<b>0 to 15 A</b> (permanently reliable)
Dynamic current with overload	Electronic current limitation to 1.05 to 1.4 x $I_{out\ rated}$ for approx. 80 ms, then electronic switching-off of output with automatic attempt at restarting (approx. 20 s interval between the restart attempts)
Dynamic current with short-circuit	Electronic current limitation to 1.5 to 3 x $I_{out\ rated}$ for approx. 20 ms, then electronic switching-off of output with automatic attempt at restarting (approx. 20 s interval between the restart attempts)
<b>Output +Bat / -Bat with normal mode</b>	
<b>I-V charging characteristic</b> (first constant current I, then constant voltage V)	
End-of-charge voltage V	27.0 V DC $\pm$ 0.1 V (default setting), <b>adjustable in range from 26.3 to 29.3 V</b> (in intervals of 0.1 V)
Charging current I	Approx. 0.7 A (default setting), <b>adjustable to 0.35 A or 0.7 A</b> (charging is carried out with the on/off circuit closed or open)
<b>Efficiency / power loss</b>	
At $V_{out\ rated} \cdot I_{out\ rated}$ approx.	96.2 %/14 W
With battery operation, approx.	96 %/15 W
<b>Protection and monitoring</b>	
Polarity reversal protection	Against input voltage and batteries with reversed polarity
Overload protection	Electronic current limitation to 1.05 to 1.4 x $I_{out\ rated}$ for approx. 80 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts)
Short-circuit protection	Electronic current limitation to 1.5 to 3 x $I_{out\ rated}$ for approx. 20 ms, then electronic switching-off of output with automatic attempts at restarting (approx. 20 s interval between the restart attempts). Internal, non-accessible 16 A fuse
Exhaustive discharge protection	Automatic switch-off at battery voltage below approx. 19 V
Monitoring "Wire breakage, battery circuit"	Alarm signal if battery circuit is not closed or if it opens during operation (cyclic test approx. every 20 s)
Monitoring "Battery replacement necessary"	Alarm signal flashing at approx. 0.25 Hz (approx. 2 s alarm, approx. 2 s no alarm, approx. 2 s alarm etc.). Check every 4 hours if no buffer mode or switch-off has taken place within 4 hours
Monitoring "Battery charge > 85 %"	Signal whether batteries are charged to at least 85 % of the rated capacity

1) All SITOP 24 V DC power supply units are permissible without limitation.

# SITOP power · Standard 24 V

## Uninterruptible power supplies

### DC UPS module 15 A

#### Technical specifications (continued)

DC UPS module 15	
<b>Order No.</b>	<b>6EP1 931-2EC21</b> <b>6EP1 931-2EC31</b> (with serial interface) <b>6EP1 931-2EC41</b> (with USB interface)
<b>Signalling</b> <sup>1)</sup>	
Normal mode	Green LED (OK) and floating changeover contact "24 V DC OK/Bat" to position "24 V DC OK" <sup>2)</sup>
Buffer or battery mode (battery supplies load on its own, or in addition to PS in event of overload)	Yellow LED (Bat) and floating changeover contact "24 V DC OK/Bat" to position "Bat" (= de-energized position)
Alarm (buffer readiness missing or pre-warning at < 20.4 V battery voltage)	Red LED (Alarm) and floating changeover contact to position "Alarm" (= de-energized position). Causes for absence of buffer readiness during normal mode could be: Operating status Off or open on/off control circuit, battery module not connected, battery faulty or with reversed polarity (battery voltage < 18.5 V) or wire breakage between battery and UPS module. Scanning and thus updating of the signal every 20 s. Causes for absence of buffer readiness during buffer mode could be: Battery voltage fallen below 20.4 V DC (= prewarning prior to switching-off by exhaustive discharge protection) as well as switching-off of battery because of overload, short-circuit, exhaustive discharge protection or expired buffer time. The Red LED then goes off.
"Battery replacement necessary"	Red LED (Alarm) flashes at 0.25 Hz and floating changeover contact (Alarm) switches at approx. 0.25 Hz
"Battery charge > 85 %"	Green LED (Bat > 85 %) and floating NO contact closed (de-energized position = open)
<b>Optional interface and software</b>	
Serial interface	Only with <b>6EP1 931-2EC31</b> Output of all signals, and receipt of signal "Remote timer start". Techn. design: PC-compatible. 8N1 send and receive, 9600 baud, 8 data bits, 1 stop bit, no parity bit. Required connection to PC: 1 : 1 continuous 9-pole SUB D extension cable (male/female), only pin 2 (RXD), pin 3 (TDX) and pin 7 (RTS) are required.
USB interface	Only with <b>6EP1 931-2EC41</b> Output of all signals, and receipt of signal "Remote timer start". Techn. design: Specification 2.0 with full speed, i.e. 2 Mbit/s. Powered by DC UPS with +5 V ("self powered"). Required connection to PC: Commercially available 4-core shielded cable, 90 Ohm, max. 5 m, USB series "A" connector to PC and USB series "B" connector to DC UPS
Software	A software tool (executes under WinNT4.0, Win 2000 and WinXP) for reading and processing the signals is available on the Internet at <a href="http://www.siemens.de/sitop">http://www.siemens.de/sitop</a> as a download. Further information on the interface can also be found there.
<b>Control signals</b>	
On/off control signal	By opening the control circuit (or using DIP switch on the device), buffer mode is terminated, or the battery is disconnected from the output. All other functions are retained.
"Remote timer start" via serial interface or USB	Starts the mains buffering for the set buffer time
<b>Safety</b>	
Galvanic isolation primary/secondary	No
Protective class	Class III (ext. circuit and power supply unit: SELV voltage acc. to EN 60950 is required)
<b>EMC</b>	
Interference emission	RI suppression acc. to EN 55022, limit characteristic B
Interference immunity	Interference immunity acc. to EN 61000-6-2
<b>Ambient conditions</b>	
Ambient temperature during operation	0 to +60 °C with natural convection
Transportation and storage temperature	-40 to +70 °C
Degree of protection (EN 60529)	IP20
Humidity rating	Conditions of use acc. to EN 60721, climatic class 3K3 (relative humidity 5 % to 85 % and absolute humidity 1 g/m <sup>3</sup> to 25 g/m <sup>3</sup> ; no condensation)
<b>Approvals</b>	
CE	CE conformity acc. to 98/336 EEC and 73/23 EEC
UL / cUL	UL 508 / CSA C22.2, File E197259
<b>Mechanical specifications</b>	
Connections for 24 V DC input	2 screw-type terminals for 1 to 4 mm <sup>2</sup> /17 to 11 AWG
Connections for 24 V DC output	4 screw-type terminals for 1 to 4 mm <sup>2</sup> /17 to 11 AWG
Connections for 24 V DC battery module	2 screw-type terminals for 1 to 4 mm <sup>2</sup> /17 to 11 AWG
Connections for control circuit and signals	10 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> /20 to 13 AWG
Dimensions (W x H x D) in mm	50 x 125 x approx. 125
Required clearance	50 mm above and 50 mm below the device
Weight	Approx. 0.4 kg (with serial or USB interface: approx. 0.45 kg)
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5

1) Permissible contact rating: 60 V DC/1 A or 30 V AC/1 A.

2) "24 V DC OK" means: Voltage of power supply unit is greater than the battery connection threshold set on the DC UPS module 15.

# SITOP power · Standard 24 V Uninterruptible power supplies

DC UPS module 40 A


## Overview

- Mounting depth only approx. 65 mm
- Rated output power 480 W with one battery module, 960 W with two battery modules
- Extremely high efficiency of approx. 99% as result of patented circuit concept
- Immediate electronic connection of battery as soon as the consumer voltage or the voltage present between the L+/M terminals of the DC UPS module falls below a value of 22.5 V DC. The consumer voltage only drops to 22 V DC for a maximum of 1 ms.
- High electronically limited peak currents (120 A for approx. 12 ms, up to 40 A for several minutes depending on the battery capacity) are automatically delivered in the event of increased load current requirements (e.g. when switching on incandescent lamps, contactors with DC autotransformer winding, DC motors, DC/DC converters, electronic modules with high input capacitance). To achieve this, at least two battery modules of 7 Ah or more must be connected in parallel.
- Following a power failure, the battery module is automatically disconnected from the consumers electronically and rapidly recharged with a constant current of 2 A (V/I characteristic with 27.3 V end-of-charge voltage).



- Signalling
  - Green LED/yellow LED and floating changeover contact for mains/battery mode
  - Red LED and floating changeover contact for buffer readiness (LED off)/ alarm (LED on)

## Integration

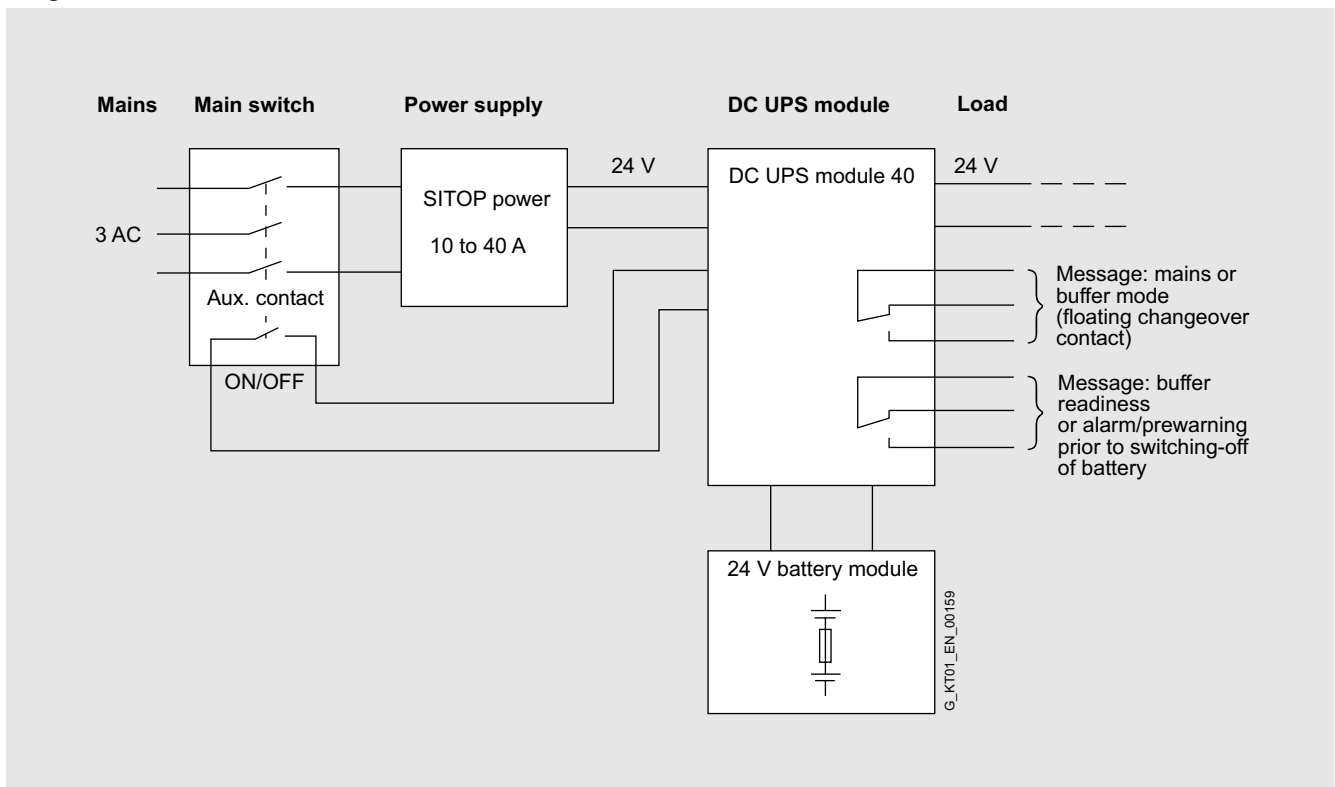


Block diagram: Configuration of uninterruptible SITOP power supply 40 A

# SITOP power · Standard 24 V Uninterruptible power supplies


## DC UPS module 40 A

### Integration (continued)

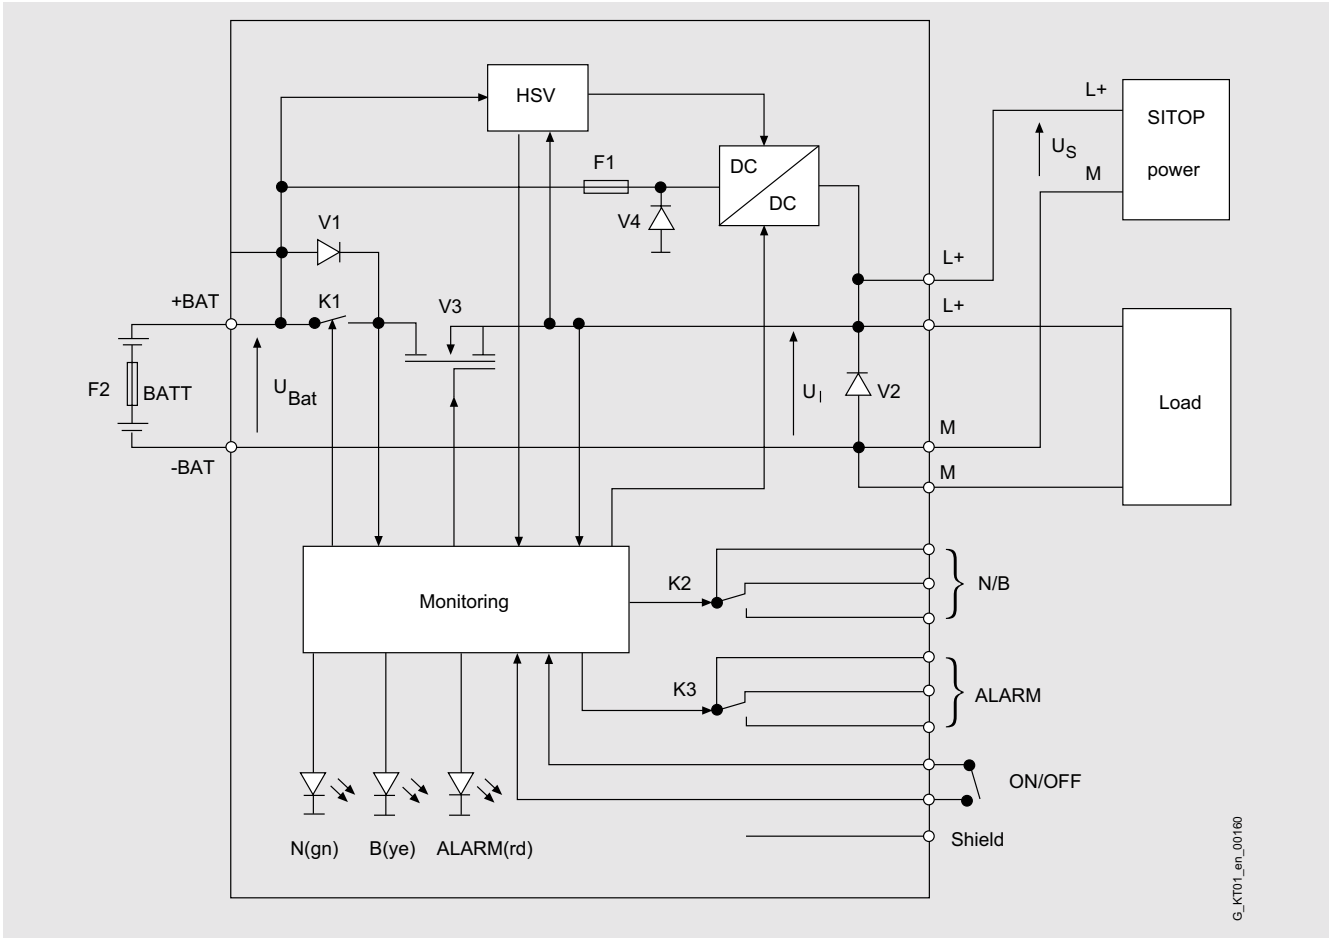

Block diagram

### Characteristic curves

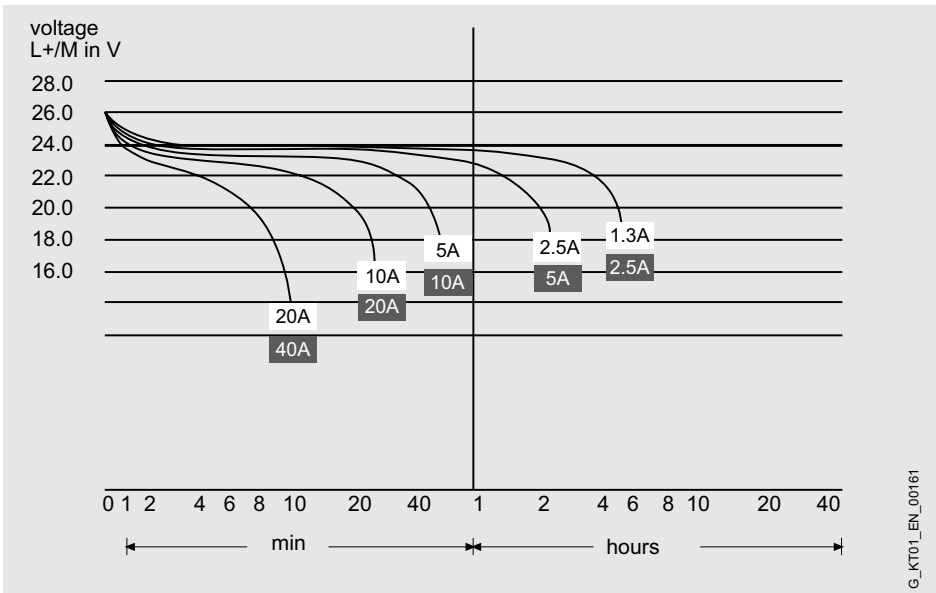

Voltage characteristic between the terminals L+/M of the DC UPS module with connection of 1 battery module 24 V/7 Ah depending on duration and load current.

Parameters: Load current 20 A/ 10 A/5 A/2.5 A/1.3 A;

2 battery modules 24 V/7 Ah

Parameters: Load current 40 A/ 20 A/10 A/5 A/2.5 A

G\_KT01\_EN\_00161

G\_KT01\_en\_00160

### Technical specifications

	DC UPS module 40 6EP1 931-2FC01
<b>Order No.</b>	6EP1 931-2FC01
<b>Input L+/ M with normal mode</b>	Stabilized direct voltage
Rated voltage $V_{in\ rated}$ <sup>1)</sup>	<b>24 V DC</b>
Voltage range	23.5 to 26 V DC
Overvoltage strength	VDE 0160 A1 (April 1989), limit curve B2 (2 x $V_{rated}$ , 0.4 ms)
Connection threshold for battery	Approx. 22.5 V
Mains buffering at $I_{out\ rated}$	Dependent on connected battery, see discharge characteristic of battery module
Rated current $I_{in\ rated}$	40 A
On/off control circuit	External floating NO contact required (load max. 12 V DC/max. 5 mA). With the control circuit open, the battery is disconnected from the output L+, and the mains buffering is therefore canceled.
<b>Output L+/ M with normal mode</b>	<b>24 V DC</b> (output voltage of SITOP power supply unit)
Rated voltage $V_{out\ rated}$	Input voltage less approx. 0.1 V
Voltage range	<b>0 to 37 A</b> (max. 3 A required for battery charging)/ <b>0 to 40 A</b>
Output current $I_{out}$ with discharged/charged battery	
<b>Output L+/ M with battery mode</b>	<b>24 V DC</b> (from battery module)
Rated voltage $V_{out\ rated}$	27 to 18.5 V DC; 27 V at no load, 25 V at $I_{out} = 0.05 \times C \times 1/h$ or 24 V at $I_{out} = 1 \times C \times 1/h$ or 23 V at $I_{out} = 2 \times C \times 1/h$ (C = total connected battery capacity in Ah), 18.5 V switch-off threshold for exhaustive discharge protection
Voltage range, approx.	0 to 25 A
Output current $I_{out}$ with a battery module of 7 Ah or more	0 to 40 A
Output current $I_{out}$ with two battery modules of 7 Ah or more	0 to 40 A
Dyn. V/I with short-circuit	Typ. 120 A for approx. 12 ms (with two battery modules of 7 Ah or more)
Output +Bat/-Bat with normal mode	<b>I-V charging characteristic</b> (first constant current I, then constant voltage V)
End-of-charge voltage	27.3 V ± 0.3 V
Charging current	<b>0 to 2.5 A</b> (typ. 2 A); charging is carried out with the on/off circuit closed or open
<b>Efficiency/power loss</b>	
at $V_{out\ rated}$ , $I_{out\ rated}$ and fully charged battery	Approx. 99 %/approx. 7 W
With battery operation	Approx. 97 %/approx. 30 W
<b>Protection and monitoring</b>	
Exhaustive discharge protection	Automatic switch-off at battery voltage < 18.5 V
Short-circuit protection	Temperature monitoring of circuit-breaker, electronic switch-off with automatic restart
Monitoring "Wire breakage, battery circuit"	Alarm signal flashing at approx. 1/3 Hz if battery circuit is not closed or if it opens during operation (cyclic test every 20 s)
<b>Signalling</b>	
On/off (battery switch-off)	External NO contact (load 12 V DC/5 mA)
Normal mode	Green LED + N/B signal (floating changeover contact N/B in position N) <sup>2)</sup>
Buffer or battery mode (battery supplies load on its own, or in addition to PS in event of overload)	Yellow LED + N/B signal (floating changeover contact N/B in position N) <sup>2)</sup>
Alarm (buffer readiness missing or pre-warning at < 20.4 V battery voltage)	Red LED + alarm signal (floating changeover contact for alarm) <sup>2)</sup>
<b>Safety</b>	
Galvanic isolation primary/secondary	No
Protective class	Class III (ext. circuit and power supply unit: SELV voltage acc. to EN 60950 is required)
TÜV test/CE marking	Yes/yes
UL/cUL (CSA) approval <sup>3)</sup>	Yes, UL/cUL recognized (UL 1950), File E172952
Degree of protection (EN 60529)	IP20
<b>EMC</b>	
Interference emission	EN 55022 Class B
Interference immunity	EN 61000-6-2
<b>Ambient conditions</b>	
Ambient temperature range in operation	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C
Humidity rating	H acc. to DIN 40040: relative humidity up to 75 % as mean value, 95 % on 30 days/year, no condensation
<b>Mechanical specifications</b>	
Input connections <sup>4)</sup> L+, M	2 screw-type terminals for 0.5 to 10 mm <sup>2</sup> single-core/finely stranded
Output connections <sup>4)</sup> L+, M	2 screw-type terminals for 0.5 to 10 mm <sup>2</sup> single-core/finely stranded
Battery connections +/-	2 screw-type terminals for 0.5 to 10 mm <sup>2</sup> single-core/finely stranded
Signals On/Off, N/B, alarm, shield connections	9 screw-type terminals for 0.5 to 2,5 mm <sup>2</sup> single-core/finely stranded
Dimensions (W x H x D) in mm, approx.	220 x 130 x 65
Approx. weight	1.2 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x7.5 or on SITOP power 90° mounting bracket

1) Reliable power supplies are the single-phase SITOP power 10 A and 20 A and the three-phase SITOP power 10 A to 40 A if their output voltage is set between 25 V and 25.5 V DC. The single-phase SITOP power supply units 2 A to 10 A with Order Nos. 6EP13...-1... are not reliable.

2) Permissible contact rating: 60 V DC/1 A or 30 V AC/1 A.

3) Approval only in combination with battery module 7 Ah (6EP1935-6ME01).

4) Both L+ and M connections are electrically connected within the device, and a differentiation of the input/output connections on the device is therefore unnecessary.

# SITOP power · Standard 24 V Uninterruptible power supplies

## Battery module 1.2 Ah

### Overview



- Battery module for DC UPS module 6 A
- Contains two maintenance-free, sealed lead-acid batteries from the same batch fitted in a holder and connected in series
- Completely prewired with battery fuse holder and terminals
- Low self-discharge rate of approx. 3 % per month (at +20 °C)

### Technical specifications

#### Battery module 1.2 Ah

**6EP1 935-6MC01**

**Maintenance-free lead-acid batteries<sup>1)</sup>**

<b>Order No.</b>	6EP1 935-6MC01
<b>Battery type, charging current/charging voltage</b>	Maintenance-free lead-acid batteries <sup>1)</sup>
Recommended end-of-charge voltage (standby use)	
• For +25 °C battery temperature	27.0 V DC
• For other battery temperatures	27.8 V for +10 °C; 27.3 V for +20 °C; 26.8 V for +30 °C; 26.7 V for +35 °C; 26.6 V for +40 °C
Recommended charging current	Max. 0.3 A
<b>Protection</b>	
Short-circuit protection	Battery fuse 15 A/32 V (FK2 flat fuse + holder)
Battery protection	Valve control
<b>Safety</b>	
Protective class	Class III
UL/cUL (CSA) approval	UL/cUL recognized (UL1778, CSA 22.2 No. 107.1-95), File E219627
Degree of protection (EN 60529)	IP00
<b>Operating specifications</b>	
Ambient temperature range	+5 to +40 °C
Transportation and storage temperature range	-20 to +50 °C
Self-discharge rate	Approx. 3 % per month at a battery temperature of 20 °C (increased value at higher temperature)
<b>Service life</b>	
The service life of the chemical lead-acid batteries (reduction to 50 % of original capacity) depends on the battery temperature as follows:	
At +20 °C	Approx. 4 years
At +25 °C	Approx. 3.5 years
At +30 °C	Approx. 3 years
At +35 °C	Approx. 2.5 years
At +40 °C	Approx. 2 years
At +45 °C	Approx. 1.5 years
At +50 °C	Approx. 1 year
<b>Mechanical specifications</b>	
Connection	1 terminal each for 0.08 to 2.5 mm <sup>2</sup> for + BAT and - BAT
Supplied accessories	Accessory pack with FK2 fuse 15 A
Dimensions (W x H x D) in mm	Approx. 96 x 106 x 108
Weight	Approx. 2 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5 or keyhole mounting for hanging in M4 screws

1) For storage, installation and operation of the lead-acid batteries, the appropriate DIN/VDE regulations or the country-specific directives (e.g. VDE 0510 Part 2/EN 50272-2) must be observed. The battery location must be sufficiently ventilated, potential ignition sources must be at least 50 cm away.

# SITOP power · Standard 24 V Uninterruptible power supplies

Battery module 2.5 Ah

## Overview



- High-temperature battery for DC UPS module 6 A and 15 A
- Contains two maintenance-free, sealed chemical lead-acid batteries from the same batch fitted in a holder and connected in series
- Completely prewired with battery fuse holder and terminals
- Low self-discharge rate of approx. 3 % per month (at +20 °C)

## Technical specifications

<b>Order No.</b>	<b>Battery module 2.5 Ah</b> <b>6EP1 935-6MD31</b>
<b>Battery type, charging current/ charging voltage</b>	<b>Maintenance-free chemical lead-acid batteries <sup>1)</sup></b>
Recommended end-of-charge voltage (standby use)	27.7 V DC
• For +25 °C battery temperature	27.7 V DC
• For other battery temperatures	29.0 V for -10 °C; 28.6 V for 0 °C; 28.3 V for +10 °C; 27.9 V for +20 °C; 27.5 V for +30 °C; 27.2 V for +40 °C; 26.8 V for +50 °C; 26.4 V for +60 °C
Recommended charging current	Max. 5 A
<b>Protection</b>	
Short-circuit protection	Battery fuse 15 A/32 V (FK2 flat fuse + holder)
Battery protection	Valve control
<b>Safety</b>	
Protective class	Class III
UL/cUL (CSA) approval	UL/cUL recognized (UL1778, CSA 22.2 No. 107.1-95), File E219627
Degree of protection (EN 60529)	IP00
<b>Operating specifications</b>	
Ambient temperature range	-40 to +60 °C with natural convection
Transportation and storage temper- ature range	-40 to +60 °C
Self-discharge rate	Approx. 3 % per month at a battery temperature of 20 °C (increased value at higher tem- perature)
<b>Service life</b>	
The service life of the chemical lead-acid batteries (reduction to 80 % of original capacity) depends on the battery temperature as follows:	
At +15 °C	Approx. 19 years
At +20 °C	Approx. 13 years
At +25 °C	Approx. 9 years
At +30 °C	Approx. 7 years
At +35 °C	Approx. 5 years
At +40 °C	Approx. 3 years
At +45 °C	Approx. 2 years
At +50 °C	Approx. 1.5 years
At +60 °C	Approx. 1 year
<b>Mechanical specifications</b>	
Connection	1 terminal each for 0.08 to 2.5 mm <sup>2</sup> for + BAT and - BAT
Supplied accessories	Accessory pack with FK2 fuse 15 A
Dimensions (W x H x D) in mm	Approx. 265 x 151 x 91
Weight	Approx. 3.8 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5 or keyhole mounting for hanging in M4 screws

1) For storage, installation and operation of the lead-acid batteries, the appropriate DIN/VDE regulations or the country-specific directives (e.g. VDE 0510 Part 2/EN 50272-2) must be observed. The battery location must be sufficiently ventilated, potential ignition sources must be at least 50 cm away.

# SITOP power · Standard 24 V Uninterruptible power supplies

## Battery module 3.2 Ah

### Overview



- Battery module for DC UPS module 6 A and 15 A
- Contains two maintenance-free, sealed lead-acid batteries from the same batch fitted in a holder and connected in series
- Includes battery fuse holder and terminals
- Low self-discharge rate of approx. 3 % per month (at +20 °C)

### Technical specifications

#### Battery module 3.2 Ah

**6EP1 935-6MD11**

**Maintenance-free, sealed lead-acid batteries<sup>1)</sup>**

<b>Order No.</b>	6EP1 935-6MD11
<b>Battery type, charging current/charging voltage</b>	Maintenance-free, sealed lead-acid batteries <sup>1)</sup>
Recommended end-of-charge voltage (standby use)	
• For +25 °C battery temperature	27.0 V DC
• For other battery temperatures	27.8 V for +10 °C; 27.3 V for +20 °C; 26.8 V for +30 °C; 26.7 V for +35 °C; 26.6 V for +40 °C
Recommended charging current	Max. 0.8 A
<b>Protection</b>	
Short-circuit protection	Battery fuse 15 A/32 V (FK2 flat fuse + holder)
Battery protection	Valve control
<b>Safety</b>	
Protective class	Class III
UL/cUL (CSA) approval	UL/cUL recognized (UL1778, CSA 22.2 No. 107.1-95), File E219627
Degree of protection (EN 60529)	IP00
<b>Operating specifications</b>	
Ambient temperature range	+5 to +40 °C with natural convection
Transportation and storage temperature range	-20 to +50 °C
Self-discharge rate	Approx. 3 % per month at a battery temperature of 20 °C (increased value at higher temperature)
<b>Service life</b>	
The service life of the chemical lead-acid batteries (reduction to 50 % of original capacity) depends on the battery temperature as follows:	
At +20 °C	Approx. 4 years
At +25 °C	Approx. 3.5 years
At +30 °C	Approx. 3 years
At +35 °C	Approx. 2.5 years
At +40 °C	Approx. 2 years
At +45 °C	Approx. 1.5 years
At +50 °C	Approx. 1 year
<b>Mechanical specifications</b>	
Connection	1 terminal each for 0.08 to 2.5 mm <sup>2</sup> for + BAT and - BAT
Supplied accessories	Accessory pack with FK2 fuse 15 A
Dimensions (W x H x D) in mm	Approx. 190 x 151 x approx. 82
Weight	Approx. 3.2 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5 or keyhole mounting for hanging in M4 screws

1) For storage, installation and operation of the lead-acid batteries, the appropriate DIN/VDE regulations or the country-specific directives (e.g. VDE 0510 Part 2/EN 50272-2) must be observed. The battery location must be sufficiently ventilated, potential ignition sources must be at least 50 cm away.

# SITOP power · Standard 24 V Uninterruptible power supplies

Battery module 7 Ah

## Overview



- Battery for DC UPS module 6 A and 15 A and DC UPS module 40 A
- Contains two maintenance-free, sealed lead-acid batteries from the same batch fitted in a holder and connected in series
- Completely prewired with battery fuse holder and terminals
- Accessory pack with FK2 spare fuses 15 A and 20 A
- Low self-discharge rate of approx. 3 % per month (at +20 °C)

## Technical specifications

		<b>Battery module 7 Ah</b>
<b>Order No.</b>		<b>6EP1 935-6ME21</b>
<b>Battery type, charging current/ charging voltage</b>		<b>Maintenance-free, sealed lead-acid batteries<sup>1)</sup></b>
Recommended end-of-charge voltage (standby use)		
• For +25 °C battery temperature	27.0 V DC	
• For other battery temperatures	27.8 V for +10 °C; 27.3 V for +20 °C; 26.8 V for +30 °C; 26.7 V for +35 °C; 26.6 V for +40 °C	
Recommended charging current	Max. 1.75 A	
<b>Protection</b>		
Short-circuit protection	Battery fuse 15 A/32 V (FK2 flat fuse + holder)	
Battery protection	Valve control	
<b>Safety</b>		
Protective class	Class III	
UL/cUL (CSA) approval	UL/cUL recognized (UL1778, CSA 22.2 No. 107.1-95), File E219627	
Degree of protection (EN 60529)	IP00	
<b>Operating specifications</b>		
Ambient temperature	+5 to +40 °C	
Transportation and storage temperature range	-20 to +50 °C	
Self-discharge rate	Approx. 3 % per month at a battery temperature of 20 °C	
<b>Service life</b>		
The service life of the chemical lead-acid batteries (reduction to 50 % of original capacity) depends on the battery temperature as follows:		
At +20 °C	Approx. 4 years	
At +25 °C	Approx. 3.5 years	
At +30 °C	Approx. 3 years	
At +35 °C	Approx. 2.5 years	
At +40 °C	Approx. 2 years	
At +45 °C	Approx. 1.5 years	
At +50 °C	Approx. 1 year	
<b>Mechanical specifications</b>		
Connection	1 terminal each for 0.08 to 4 mm <sup>2</sup> for + BAT - BAT	
Supplied accessories	Accessory pack with FK2 spare fuses 15 A and 20 A	
Dimensions (W x H x D) in mm	Approx. 186 x 168 x 121	
Weight	Approx. 6.0 kg	
Mounting	Can be screwed on level surface (Keyhole mounting for hanging in M4 screws)	

1) For storage, installation and operation of the lead-acid batteries, the appropriate DIN/VDE regulations or the country-specific directives (e.g. VDE 0510 Part 2/EN 50272-2) must be observed. The battery location must be sufficiently ventilated, potential ignition sources must be at least 50 cm away.

# SITOP power · Standard 24 V Uninterruptible power supplies

## Battery module 12 Ah

### Overview



- Battery for DC UPS module 6 A and 15 A and DC UPS module 40 A
- Contains two maintenance-free, sealed lead-acid batteries from the same batch fitted in a holder and connected in series
- Completely prewired with battery fuse holder and terminals
- Accessory pack with FK2 spare fuses 15 A and 20 A
- Low self-discharge rate of approx. 3 % per month (at +20 °C)

### Technical specifications

#### Battery module 12 Ah

**6EP1 935-6MF01**

#### Battery type, charging current/ charging voltage

**Maintenance-free, sealed lead-acid batteries<sup>1)</sup>**

Recommended end-of-charge voltage (standby use)

- For +25 °C battery temperature 27.0 V DC
- For other battery temperatures 27.8 V for +10 °C;  
27.3 V for +20 °C;  
26.8 V for +30 °C;  
26.7 V for +35 °C;  
26.6 V for +40 °C

Recommended charging current Max. 3 A

#### Protection

Short-circuit protection	Battery fuse 15 A/32 V (FK2 flat fuse + holder)
Battery protection	Valve control

#### Safety

Protective class	Class III
UL/cUL (CSA) approval	UL/cUL recognized (UL1778, CSA 22.2 No. 107.1-95), File E219627

Degree of protection (EN 60529) IP00

#### Operating specifications

Ambient temperature	+5 to +40 °C
Transportation and storage temperature range	-20 to +50 °C
Self-discharge rate	Approx. 3 % per month at a battery temperature of 20 °C

#### Service life

The service life of the chemical lead-acid batteries (reduction to 50 % of original capacity) depends on the battery temperature as follows:

At +20 °C	Approx. 4 years
At +25 °C	Approx. 3.5 years
At +30 °C	Approx. 3 years
At +35 °C	Approx. 2.5 years
At +40 °C	Approx. 2 years
At +45 °C	Approx. 1.5 years
At +50 °C	Approx. 1 year

#### Mechanical specifications

Connection	1 terminal each for 0.08 to 4 mm <sup>2</sup> for + BAT - BAT
Supplied accessories	Accessory pack with FK2 spare fuses 15 A and 20 A
Dimensions (W x H x D) in mm	Approx. 253 x 118 x 121
Weight	Approx. 9.0 kg
Mounting	Can be screwed on level surface (Keyhole mounting for hanging in M4 screws)

1) For storage, installation and operation of the lead-acid batteries, the appropriate DIN/VDE regulations or the country-specific directives (e.g. VDE 0510 Part 2/EN 50272-2) must be observed. The battery location must be sufficiently ventilated, potential ignition sources must be at least 50 cm away.

## SITOP power Alternative voltages

# 10



- 10/2 SITOP power flexi 120 W
- 10/2 SITOP power dual 15 V
- 10/2 SITOP modular 48 V/20 A



# SITOP power

## Alternative voltages

### Overview

#### SITOP power flexi 120 W



#### SITOP power dual 15 V



#### SITOP modular 48 V/20 A



### Application

The power supply unit with adjustable output voltage from 3 V to 52 V; suitable for all applications where a special voltage deviating from 24 V is required.

The industry-standard power supply unit with two 15 V outputs which can be connected in parallel or in series; can be used, for example, for supplying electronic loads with  $\pm 15$  V.

The modular 48 V power supply unit with three-phase wide-range input for powerful loads which are powered by twice the voltage instead of the usual 24 V.

### Technical specifications

Power supply, type	3 to 52 V/2 to 10 A	2 x 15 V/3.5 A	48 V/20 A
Order No.	6EP1 353-2BA00	6EP1 353-0AA00	6EP1 457-3BA00
Input	Single-phase AC	Single-phase AC	Three-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>120/230 V AC</b>	<b>120 to 230 V AC</b>	<b>400 to 500 V 3 AC</b>
Voltage range	Settable using wire jumper 85 to 132 V/170 to 264 V AC	wide-range input 93 to 264 V AC	wide-range input 320 to 550 V (startup from $V_{in} > 340$ V)
Overvoltage strength	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms	Surge voltage acc. to EN 61000-6-2 Table 4	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms
Mains buffering at $I_{out \text{ rated}}$	$> 10$ ms at $V_{in} = 93/187$ V ( $P_{out} = 120$ W)	$> 10/40$ ms at $V_{in} = 120/187$ V	$> 6$ ms at $V_{in} = 400$ V
Rated line frequency; range	50/60 Hz, 47 to 63 Hz	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	2.2/0.9 A	1.9 to 1.15 A	2.2 A ( $V_{in} = 400$ V)
Inrush current limitation (+ 25 °C)	$< 32$ A	$< 30$ A, typ. 3 ms	$< 70$ A
$I^2t$	$< 0.8$ A <sup>2</sup> s	$< 3$ A <sup>2</sup> s	$< 2.8$ A <sup>2</sup> s
Integrated line-side fuse	T3.15 A/250 V (not accessible)	T4 A/250 V (not accessible)	none
Recommended circuit-breaker (IEC 898) in mains supply line	From 6 A Characteristic C	From 10 A Characteristic C or from 16 A Characteristic B	Required: 3-pole coupled circuit-breaker 10 to 16 A Char. C or motor circuit-breaker 3RV1021-1DA10, setting 3 A
Output	Stabilized, floating direct voltage	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>3 to 52 V DC</b>	<b>2 x 15 V DC</b>	<b>48 V DC</b>
Total tolerance	$\pm 1$ %	$\pm 2$ %	$\pm 3$ %
• Stat. mains compensation	Approx. 0.1 %	Approx. 0.2 %	Approx. $\pm 0.1$ %
• Stat. load compensation	Approx. 0.2 %	Approx. 0.2 %	Approx. $\pm 0.2$ %
Sense line connection	Yes, maximum voltage control 0.5 V per line	-	-
Residual ripple (clock frequency: approx. 50 kHz)	$< 50$ mV <sub>pp</sub>	$< 50$ mV <sub>pp</sub> (typ. 20 mV <sub>pp</sub> )	$< 100$ mV <sub>pp</sub>
Spikes (bandwidth: 20 MHz)	$< 100$ mV <sub>pp</sub>	$< 150$ mV <sub>pp</sub> (typ. 150 mV <sub>pp</sub> )	$< 200$ mV <sub>pp</sub>
Setting range	3 to 52 V, via potentiometer or analog control voltage signal 0 to 2.5 V	14.5 to 17 V	42 to 56 V (max. 960 W)
Status display	Green LED for 24 V O.K.	Green LED for $V_{out} > 10$ V (summation display)	Green LED for 48 V O.K.
Signalling	Power Good via relay contact, current monitor signal 0 to 2.5 V	-	possible using signalling module (6EP1 961-3BA10)
Power ON/OFF behavior	No overshoot of $V_{out}$ (soft start)	Overshoot of $V_{out} < 3$ %	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	$< 3$ s/typ. 80 ms	$< 1$ s	$< 2.5$ s/ $< 500$ ms
Rated current $I_{out \text{ rated}}$	<b>2 to 10 A</b> (max. 120 W)	<b>2 x 3.5 A</b>	<b>20 A</b>
Current range	0 to 10 A (max. 120 W)	2 x 0 to 3.5 A	0 to 20 A
• up to + 45 °C	0 to 10 A (max. 120 W)	2 x 0 to 2.5 A	0 to 20 A
• up to + 60 °C	0 to 10 A (max. 120 W)		

Continued on page 10/3.

## Technical specifications (continued)

Power supply, type	3 to 52 V/2 to 10 A	2 x 15 V/3.5 A	48 V/20 A
Order No.	6EP1 353-2BA00	6EP1 353-0AA00	6EP1 457-3BA00
Dyn. V/I with			
• Starting on short circuit	Constant current 2 to 10 A		Constant current approx. 23 A
• Short-circuit in operation	Constant current 2 to 10 A		typ. 60 A for 25 ms
Parallel connection for increased output	Yes, 2	Yes, 2	Yes, 2
<b>Efficiency</b>			
Efficiency at $V_{out\ rated}, I_{out\ rated}$	Approx. 84 % (at 24 V/5 A)	Approx. 80 %	Approx. 90 %
Power loss at $V_{out\ rated}, I_{out\ rated}$	Approx. 23 W (at 24 V/5 A)	Approx. 27 W	Approx. 106 W
<b>Protection and monitoring</b>			
Output overvoltage protection	Yes, acc. to EN 60950	Yes, acc. to EN 60950	Yes, acc. to EN 60950
Current limitation	2 to 10 A, adjustable via potentiometer or analog control voltage signal 0 to 2.5 V	Limit point < 4.9 A; switch-off point < 6 A	typ. 23 A
Short-circuit protection	Electronic current limiting (2 to 10 A) in the range 3 to 12 V or power limiting (120 W) in the range 12 to 52 V	Electronic shutdown, automatic restart	Choice of stabilized current characteristic approx. 23 A or latching shutdown
Overload/short-circuit indicator	Red LED for current or power limiting	-	Yellow LED for "overload", red LED for "latching shutdown"
<b>Safety</b>			
Galvanic isolation primary/ secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950	Yes, SELV output voltage $V_{out}$ acc. to EN 60950
Protective class	Class I	Class I	Class I
Discharge current	< 3.5 mA	< 3.5 mA	< 3.5 mA
TÜV test	Yes	-	Yes
CE marking	Yes	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E143289	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M91), File E179336	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M95), File E197259
FM approval	-	-	-
Appr. for use in marine vessels	-	-	-
Degree of protection (EN 60529)	IP20	IP20	IP20
<b>EMC</b>			
Interference emission	EN 55022 Class B	EN 55011 Class A	EN 55022 Class B
Line harmonics limitation	EN 61000-3-2	-	EN 61000-3-2
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>			
Ambient temperature range	0 to +60 °C with natural convection	0 to +60 °C with natural convection, derating above +45 °C	0 to +60 °C with natural convection
Transportation and storage temperature range	-25 to +85 °C	-40 to +70 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721	Climatic class 3K3 acc. to EN 60721	Climatic class 3K3 acc. to EN 60721
<b>Mechanical specifications</b>			
Connections			
• Mains input L1, N, PE	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded	One screw-type terminal each for 0.2 to 4 mm <sup>2</sup> single-core/finely stranded (L1, L2, L3, PE)
• Output	One screw-type terminal for 0.5 to 2.5 mm <sup>2</sup> (L+) and 2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> (M)	One screw-type terminal for 0.5 to 2.5 mm <sup>2</sup> (P15_1, GND1, GND2) and 2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup> (P15_2)	2 screw-type terminals each for 0.33 to 10 mm <sup>2</sup> (+, -)
• Messages, control inputs	One screw-type terminal each for 0.14 to 1.5 mm <sup>2</sup>	-	-
Dimensions (W x H x D) in mm	75 x 125 x 125	75 x 125 x 125	240 x 125 x 125
Weight approx.	Approx. 0.9 kg	Approx. 0.75 kg	3.2 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5
<b>Accessories</b>	-	-	Signalling module (6EP1961-3BA10)

# SITOP power

## Alternative voltages

Notes

10



# SITOP power AS interface power supplies

# 11



11/2 The IP65 version  
11/2 The IP20 version



# SITOP power AS interface power supplies

Single-phase AS interface power supplies,  
stabilized

## Overview

### The IP65 version



### The IP20 version



## Application

The AS interface power supply unit with IP65 degree of protection for any mounting position is particularly suitable for use in extremely harsh environments. Thanks to the 24 V DC input voltage it is ideally suitable for use together with a proven SITOP power 24 V standard power supply unit.

This AS interface power supply unit with its wide-range input of 93 to 264 V AC and 110 to 350 V DC can be universally used in all typical power supply networks. With limitation of the input current harmonics acc. to EN 61000-3-2; with SIMATIC S7-300 design.

## Technical specifications

Power supply, type	2.4 A	7 A
Order No.	6EP1 632-1AL01	6EP1 354-1AL01
<b>Input</b>	DC voltage	Single-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>24 V DC</b>	<b>120 to 230 V AC</b> wide-range input 93 to 264 V AC/110 to 350 V DC
Voltage range	20.4 to 28.8 V DC	
Overvoltage strength	35 V DC for max. 500 ms	$2.3 \times V_{in \text{ rated}}$ , 1.3 ms
Mains buffering at $I_{out \text{ rated}}$	> 10 ms	> 20 ms at $V_{in} = 93/187 \text{ V}$
Rated line frequency; range	-	0/50/60 Hz; 47 to 63 Hz
Rated input current $I_{in \text{ rated}}$	3.6 A	2.2 to 1.2 A
Inrush current limitation (+25 °C)	-	< 20 A, < 3 ms
$I^2t$	-	< 1.5 A <sup>2</sup> s
Integrated line-side fuse	T 6.3 A (not accessible)	T 6.3 A (not accessible)
Recommended circuit-breaker (IEC 898) in mains supply line	From 10 A, Characteristic C or from 6 A, Characteristic D	From 16 A, Characteristic C
<b>Output</b>	Stabilized, floating direct voltage acc. to AS interface specifications	Stabilized, floating direct voltage acc. to AS interface specification
Rated voltage $V_{out \text{ rated}}$	<b>30 V DC</b>	<b>30 V DC</b>
Total tolerance	29.5 V to 31.6 V DC	29.5 to 31.6 V DC
Residual ripple	< 300 mV <sub>pp</sub>	< 300 mV <sub>pp</sub>
Spikes	< 50 mV <sub>pp</sub>	< 50 mV <sub>pp</sub>
Status display	Green LED	Green LED
Rated current $I_{out \text{ rated}}$	<b>2.4 A</b>	<b>7 A</b>
<b>Efficiency / power loss</b>		
Efficiency at $V_{out \text{ rated}}$ , $I_{out \text{ rated}}$	> 81%	> 85%
Power loss at $V_{out \text{ rated}}$ , $I_{out \text{ rated}}$	< 17 W	< 37 W
<b>Protection and monitoring functions</b>		
Output overvoltage protection	-	Yes
Current limiting	From approx. 2.9 A	From approx. 7.4 A
Short-circuit protection	Constant current characteristic approx. 2.9 A	Constant current characteristic approx. 7.4 A

Continued on page 11/3.

# SITOP power AS interface power supplies

Single-phase AS interface power supplies,  
stabilized

Power supply, type	2.4 A	7 A
<b>Order No.</b>	<b>6EP1 632-1AL01</b>	<b>6EP1 354-1AL01</b>
<b>Safety</b>		
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950	Yes, SELV output voltage $V_{out}$ acc. to EN 60950
Protective class	Class I	Class I
Degree of protection (EN 60529)	IP65 <sup>1)</sup>	IP20
CE marking	Yes	Yes
UL/cUL (CSA) approval	UL (UL 508), File 179336, CSA (CSA 22.2 No. 14-95)	cULus (UL 508, CSA 22.2 No.14-M91), File E143289
<b>EMC</b>		
Interference emission	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	Not applicable	EN 61000-3-2
Interference immunity	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>		
Ambient temperature range	-25 to +55 °C	0 to +55 °C
Transportation and storage temperature range	-25 to +85 °C	-25 to +85 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>		
Input connections	Circular connector 0.5 to 2.5 mm <sup>2</sup> <sup>1)2)</sup>	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/finely stranded
Output connections AS i +	500 mm three-core cable AWG 14 <sup>1)</sup>	3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
Output connections AS i -	500 mm three-core cable AWG 14 <sup>1)</sup>	3 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
Output connections Ground	500 mm three-core cable AWG 14 <sup>1)</sup>	2 screw-type terminals for 0.5 to 2.5 mm <sup>2</sup>
Dimensions (W x H x D) in mm	224 x 80 x 57	200 x 125 x 135
Weight approx.	1.0 kg	1.8 kg
Mounting	Wall mounting, any mounting position	Snap-mounting on DIN rail EN 50022-35x15 mm and S7 rail
<b>Accessories</b>	6-pin circular input connector (6ES5 760-2CA11) and AS interface coupling module PG (3RG9 220-0AA00)	-

1) In IP20 degree of protection with screw-type terminals on request.

2) The counterpart must be ordered separately (not included in the scope of delivery); see Accessories.

# SITOP power AS interface power supplies

Notes



# SITOP power Customized

# 12



12/2 Description  
12/3 Specification sheet



# SITOP power Customized

## Overview

Our tried and tested standard power supplies cannot, of course, be suitable for absolutely every application. Does your application require a voltage level other than 24 V, or is a 19" or open-frame version necessary, or are the environmental conditions of your system sometimes outside the normal ranges? We offer the possibility for optimum adaptation to your application-specific requirements.

Thanks to the experience and know-how of our development team, we are able to offer you a tailored solution by applying a modular power supply concept. Your specific requirements can be fulfilled by modifying existing equipment or by complete new developments on the basis of pre-developed standard components. Your advantages are evident:

- Adaptation of the power supply to your application, and not vice versa as in the past
- Highly flexible electrical parameters
- AC or DC input
- Several output voltages possible
- High reliability through use of standard components
- Variability with respect to design requirements
- Adaptable mechanical system.

You therefore benefit from the competence of mass production together with a maximum of development reliability and quality. Further decisive criteria for the success of your application are:

- High availability thanks to fast development cycles
- Short time span between development and start of series production thanks to tried and tested launch procedures
- Prices in line with the market.

Our customized solutions are currently in use in many sectors of mechanical engineering, automation engineering, vehicle electronics, equipment design and industrial measurement engineering, among others.

Our product range is open to any application. If you are interested and require further information, please copy the following page, fill in the parameters of your specific requirement and fax it to the stated number.

Form for inquiry is also available at:

[http://intra1.nbgm.siemens.de/extern/spiegeln/sitop/html\\_76/formular.htm](http://intra1.nbgm.siemens.de/extern/spiegeln/sitop/html_76/formular.htm)

You can fill it out right on the screen and send it to us immediately. We will contact you without delay.



**FAX reply**

**Specification sheet for customized power supplies**

**Recipient:**

SIEMENS AG  
A&D SE PS 1  
Würzburger Straße 121  
90766 Fürth

**FAX: 0911 750-9991**

Sender:

Company: \_\_\_\_\_

Department: \_\_\_\_\_

Name: \_\_\_\_\_

City: \_\_\_\_\_

FAX: \_\_\_\_\_

Phone: \_\_\_\_\_

**Application:**

**Electrical requirements:**

Input voltage:  $V_{in}$ : \_\_\_\_\_ Tolerance  $\Delta V_{in}$ : \_\_\_\_\_

Frequency:  $f_{in}$ : \_\_\_\_\_ Tolerance  $\Delta f_{in}$ : \_\_\_\_\_

Mains buffering time:  $T_{in}$ : \_\_\_\_\_

Output voltage:  $V_{out1}$ : \_\_\_\_\_  $V_{out2}$ : \_\_\_\_\_  $V_{out3}$ : \_\_\_\_\_  $V_{out4}$ : \_\_\_\_\_

Output current:  $I_{out1}$ : \_\_\_\_\_  $I_{out2}$ : \_\_\_\_\_  $I_{out3}$ : \_\_\_\_\_  $I_{out4}$ : \_\_\_\_\_

Other: \_\_\_\_\_  
\_\_\_\_\_

**Mechanical requirements:**

Design/dimensions: \_\_\_\_\_ Enclosure: \_\_\_\_\_  
(attach drawing if necessary)

Connections: \_\_\_\_\_ Other: \_\_\_\_\_

**General requirements:**

Efficiency: \_\_\_\_\_

Ambient temperature: \_\_\_\_\_ Signalling: \_\_\_\_\_

Standards:  EN 60950  UL  cUL (CSA) \_\_\_\_\_

EN 61000-6-1/2  EN 61000-6-3/4

\_\_\_\_\_

Quantity/year: \_\_\_\_\_ Delivery: \_\_\_\_\_

Price expectations: \_\_\_\_\_

Remarks: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_





- 13/2 LOGO!Power 5 V
- 13/4 LOGO!Power 12 V
- 13/6 LOGO!Power 15 V
- 13/8 LOGO!Power 24 V



## LOGO!Power 5 V

### Overview

### LOGO!Power 5 V



### Application

LOGO!Power supplies are primary switched-mode power supplies that are optimized to the LOGO! logic modules in terms of functionality and design. With the wide input range of 85 V to 264 V AC, radio interference level B and assembly option in built-in miniature distribution boards, they can be used universally in a diverse range of applications in the low-end performance range.

### Technical specifications

Power supply, type	5 V/3 A	5 V/6.3 A
Order No.	6EP1 311-1SH02	6EP1 311-1SH12
<b>Input</b>	Single-phase AC	Single-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>100 to 240 V AC</b>	<b>100 to 240 V AC</b>
Voltage range	wide-range input 85 to 264 V AC	wide-range input 85 to 264 V AC
Overvoltage strength	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$
Mains buffering at $I_{out \text{ rated}}$	> 40 ms at $V_{in} = 187 \text{ V}$	> 40 ms at $V_{in} = 187 \text{ V}$
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	0.36 to 0.22 A	0.71 to 0.37 A
Inrush current limitation (+25 °C)	< 15 A	< 30 A
$I^2t$	< 0.8 A <sup>2</sup> s	< 3 A <sup>2</sup> s
Integrated line-side fuse	Internal	Internal
Recommended circuit-breaker (IEC 898) in mains supply line	From 16 A Characteristic B or from 10 A Characteristic C	From 16 A Characteristic B or from 10 A Characteristic C
<b>Output</b>	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>5 V DC</b>	<b>5 V DC</b>
Total tolerance, static	± 3 %	± 3 %
• Static mains compensation	Approx. 0.2 %	Approx. 0.1 %
• Static load compensation	Approx. 1.5 %	Approx. 2 %
Residual ripple (clock frequency approx. 90 kHz)	< 100 mV <sub>pp</sub>	< 100 mV <sub>pp</sub>
Spikes (bandwidth approx. 20 MHz)	< 100 mV <sub>pp</sub>	< 100 mV <sub>pp</sub>
Setting range	4.6 to 5.4 V	4.6 to 5.4 V
Status display	Green LED for output voltage OK	Green LED for output voltage OK
Power ON/OFF behavior	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	< 0.5 s/typ. 15 ms	< 0.5 s/typ. 10 ms
Rated current $I_{out \text{ rated}}$	<b>3 A</b>	<b>6.3 A</b>
Current range up to +55 °C	0 to 3 A	0 to 6.3 A
Parallel connection for increased output	Yes	Yes

Continued on page 13/3.

Power supply, type	5 V/3 A	5 V/6.3 A
<b>Order No.</b>	<b>6EP1 311-1SH02</b>	<b>6EP1 311-1SH12</b>
<b>Efficiency</b>		
Efficiency at $V_{out\ rated}$ , $I_{out\ rated}$	typ. 76 %	typ. 83 %
Power loss at $V_{out\ rated}$ , $I_{out\ rated}$	typ. 5 W	typ. 6 W
<b>Control</b>		
Dyn. mains compensation ( $V_{in\ rated} \pm 15\%$ )	< 0.2 % $V_{out}$	< 0.2 % $V_{out}$
Dyn. load compensation ( $I_{out}$ : 10/90/10 %)	$\pm 4\%$ $V_{out}$	$\pm 6.5\%$ $V_{out}$
<b>Settling time</b>		
• Load step from 10 to 90 %	typ. 20 ms	typ. 20 ms
• Load step from 90 to 10 %	typ. 20 ms	typ. 20 ms
<b>Protection and monitoring</b>		
Current limitation	typ. 3.8 A	typ. 8.2 A
Short-circuit protection	Stabilized current characteristic	Stabilized current characteristic
RMS sustained short-circuit current	< 5 A	< 10 A
Overload/short-circuit indicator	-	-
<b>Safety</b>		
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178
Protective class	Class II (without PE conductor)	Class II (without PE conductor)
CE marking	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M95), File E197259; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M95), File E197259; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273
FM approval	Yes, Class I Div. 2, Group A, B, C, D T4	Yes, Class I Div. 2, Group A, B, C, D T4
Appr. for use in marine vessels	Yes, GL (Germanischer Lloyd)	Yes, GL (Germanischer Lloyd)
Degree of protection (EN 60529)	IP20	IP20
<b>EMC</b>		
Interference emission	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	Not applicable	Not applicable
Interference immunity	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>		
Ambient temperature range	-20 to +55 °C with natural convection	-20 to +55 °C with natural convection
Transportation and storage temperature range	-40 to +70 °C	-40 to +70 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>		
Mains input connections L1, N	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded
Connections		
• Output +	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>
• Output -		
Dimensions (W x H x D) in mm	54 x 90 x 55	72 x 90 x 55
Weight	Approx. 0.17 kg	Approx. 0.25 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x7.5/15	Snap-mounting on DIN rail EN 50022-35x7.5/15

## LOGO!Power 12 V

### Overview



### Application

LOGO!Power supplies are primary switched-mode power supplies that are optimized to the LOGO! logic modules in terms of functionality and design. With the wide input range of 85 V to 264 V AC, radio interference level B and assembly option in built-in miniature distribution boards, they can be used universally in a diverse range of applications in the low-end performance range.

### Technical specifications

Power supply, type	12 V/1.9 A	12 V/4.5 A
Order No.	<b>6EP1 321-1SH02</b>	<b>6EP1 322-1SH02</b>
<b>Input</b>	Single-phase AC	Single-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>100 to 240 V AC</b>	<b>100 to 240 V AC</b>
Voltage range	wide-range input 85 to 264 V AC	wide-range input 85 to 264 V AC
Oversvoltage strength	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$
Mains buffering at $I_{out \text{ rated}}$	> 40 ms at $V_{in} = 187 \text{ V}$	> 40 ms at $V_{in} = 187 \text{ V}$
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	0.53 to 0.3 A	1.13 to 0.61 A
Inrush current limitation (+25 °C)	< 15 A	< 30 A
$I^2t$	< 0.8 A <sup>2</sup> s	< 3 A <sup>2</sup> s
Integrated line-side fuse	Internal	Internal
Recommended circuit-breaker (IEC 898) in mains supply line	From 16 A Characteristic B or from 10 A Characteristic C	From 16 A Characteristic B or from 10 A Characteristic C
<b>Output</b>	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>12 V DC</b>	<b>12 V DC</b>
Total tolerance, static	± 3 %	± 3 %
• Static mains compensation	Approx. 0.2 %	Approx. 0.1 %
• Static load compensation	Approx. 1.5 %	Approx. 1.5 %
Residual ripple (clock frequency approx. 90 kHz)	< 200 mV <sub>pp</sub>	< 200 mV <sub>pp</sub>
Spikes (bandwidth approx. 20 MHz)	< 300 mV <sub>pp</sub>	< 300 mV <sub>pp</sub>
Setting range	10.5 to 16.1 V	10.5 to 16.1 V
Status display	Green LED for output voltage OK	Green LED for output voltage OK
Power ON/OFF behavior	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	< 0.5 s/typ. 15 ms	< 0.5 s/typ. 10 ms
Rated current $I_{out \text{ rated}}$	<b>1.9 A</b>	<b>4.5 A</b>
Current range up to +55 °C	0 to 1.9 A	0 to 4.5 A
Parallel connection for increased output	Yes	Yes

Continued on page 13/5.

Power supply, type	12 V/1.9 A	12 V/4.5 A
<b>Order No.</b>	<b>6EP1 321-1SH02</b>	<b>6EP1 322-1SH02</b>
<b>Efficiency</b>		
Efficiency at $V_{out\ rated}$ , $I_{out\ rated}$	typ. 80 %	typ. 85 %
Power loss at $V_{out\ rated}$ , $I_{out\ rated}$	typ. 5 W	typ. 10 W
<b>Control</b>		
Dyn. mains compensation ( $V_{in\ rated} \pm 15\%$ )	< 0.2 % $V_{out}$	< 0.2 % $V_{out}$
Dyn. load compensation ( $I_{out}$ : 10/90/10 %)	$\pm 3\%$ $V_{out}$	$\pm 4.2\%$ $V_{out}$
<b>Settling time</b>		
• Load step from 10 to 90 %	typ. 20 ms	typ. 20 ms
• Load step from 90 to 10 %	typ. 20 ms	typ. 20 ms
<b>Protection and monitoring</b>		
Current limitation	typ. 2.5 A	typ. 5.9 A
Short-circuit protection	Stabilized current characteristic	Stabilized current characteristic
RMS sustained short-circuit current	< 4 A	< 8 A
Overload/short-circuit indicator	-	-
<b>Safety</b>		
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178
Protective class	Class II (without PE conductor)	Class II (without PE conductor)
CE marking	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M95), File E197259; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M95), File E197259; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273
FM approval	Yes, Class I Div. 2, Group A, B, C, D T4	Yes, Class I Div. 2, Group A, B, C, D T4
Appr. for use in marine vessels	Yes, GL, ABS	Yes, GL, ABS
Degree of protection (EN 60529)	IP20	IP20
<b>EMC</b>		
Interference emission	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	Not applicable	Not applicable
Interference immunity	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>		
Ambient temperature range	-20 to +55 °C with natural convection	-20 to +55 °C with natural convection
Transportation and storage temperature range	-40 to +70 °C	-40 to +70 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>		
Connections		
• Mains input L1, N	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/ finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single-core/ finely stranded
• Output +	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>
• Output -		
Dimensions (W x H x D) in mm	54 x 90 x 55	72 x 90 x 55
Weight	Approx. 0.17 kg	Approx. 0.25 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x7.5/15	Snap-mounting on DIN rail EN 50022-35x7.5/15

## LOGO!Power 15 V

### Overview



### Application

LOGO!Power supplies are primary switched-mode power supplies that are optimized to the LOGO! logic modules in terms of functionality and design. With the wide input range of 85 V to 264 V AC, radio interference level B and assembly option in built-in miniature distribution boards, they can be used universally in a diverse range of applications in the low-end performance range.

### Technical specifications

Power supply, type	15 V/1.9 A	15 V/4 A
Order No.	<b>6EP1 351-1SH02</b>	<b>6EP1 352-1SH02</b>
<b>Input</b>	Single-phase AC	Single-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>100 to 240 V AC</b>	<b>100 to 240 V AC</b>
Voltage range	wide-range input	wide-range input
Overvoltage strength	85 to 264 V AC	85 to 264 V AC
Overvoltage strength	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$
Mains buffering at $I_{out \text{ rated}}$	$> 40 \text{ ms}$ at $V_{in} = 187 \text{ V}$	$> 40 \text{ ms}$ at $V_{in} = 187 \text{ V}$
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	0.63 to 0.33 A	1.24 to 0.68 A
Inrush current limitation (+25 °C)	$< 15 \text{ A}$	$< 30 \text{ A}$
$I^2t$	$< 0.8 \text{ A}^2\text{s}$	$< 3 \text{ A}^2\text{s}$
Integrated line-side fuse	Internal	Internal
Recommended circuit-breaker (IEC 898) in mains supply line	From 16 A Characteristic B or from 10 A Characteristic C	From 16 A Characteristic B or from 10 A Characteristic C
<b>Output</b>	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>15 V DC</b>	<b>15 V DC</b>
Total tolerance, static	$\pm 3 \%$	$\pm 3 \%$
• Static mains compensation	Approx. 0.1 %	Approx. 0.1 %
• Static load compensation	Approx. 1.5 %	Approx. 1.5 %
Residual ripple (clock frequency approx. 90 kHz)	$< 200 \text{ mV}_{pp}$	$< 200 \text{ mV}_{pp}$
Spikes (bandwidth approx. 20 MHz)	$< 300 \text{ mV}_{pp}$	$< 300 \text{ mV}_{pp}$
Setting range	10.5 to 16.1 V	10.5 to 16.1 V
Status display	Green LED for output voltage	Green LED for output voltage
Power ON/OFF behavior	OK	OK
Starting delay/voltage rise	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	$< 0.5 \text{ s/typ. } 15 \text{ ms}$	$< 0.5 \text{ s/typ. } 10 \text{ ms}$
Rated current $I_{out \text{ rated}}$	<b>1.9 A</b>	<b>4 A</b>
Current range up to +55 °C	0 to 1.9 A	0 to 4 A
Parallel connection for increased output	Yes	Yes

Continued on page 13/7.

Power supply, type	15 V/1.9 A	15 V/4 A
Order No.	6EP1 351-1SH02	6EP1 352-1SH02
<b>Efficiency</b>		
Efficiency at $V_{out\ rated}$ , $I_{out\ rated}$	typ. 80 %	typ. 85 %
Power loss at $V_{out\ rated}$ , $I_{out\ rated}$	typ. 7 W	typ. 11 W
<b>Control</b>		
Dyn. mains compensation ( $V_{in\ rated} \pm 15\%$ )	< 0.2 % $V_{out}$	< 0.2 % $V_{out}$
Dyn. load compensation ( $I_{out}$ : 10/90/10 %)	$\pm 2.8\%$ $V_{out}$	$\pm 3.3\%$ $V_{out}$
<b>Settling time</b>		
• Load step from 10 to 90 %	typ. 20 ms	typ. 20 ms
• Load step from 90 to 10 %	typ. 20 ms	typ. 20 ms
<b>Protection and monitoring</b>		
Current limitation	typ. 2.7 A	typ. 5.0 A
Short-circuit protection	Stabilized current characteristic	Stabilized current characteristic
RMS sustained short-circuit current	< 4 A	< 8 A
Overload/short-circuit indicator	-	-
<b>Safety</b>		
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178
Protective class	Class II (without PE conductor)	Class II (without PE conductor)
CE marking	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M95), File E197259; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273	Yes, cULus listed (UL 508, CSA 22.2 No. 14-M95), File E197259; cURus recognized (UL 60950, CSA 22.2 No. 60950), File E151273
FM approval	Yes, Class I Div. 2, Group A, B, C, D T4	Yes, Class I Div. 2, Group A, B, C, D T4
Appr. for use in marine vessels Degree of protection (EN 60529)	Yes, GL (Germanischer Lloyd) IP20	Yes, GL (Germanischer Lloyd) IP20
<b>EMC</b>		
Interference emission	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	Not applicable	Not applicable
Interference immunity	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>		
Ambient temperature range	-20 to +55 °C with natural convection	-20 to +55 °C with natural convection
Transportation and storage temperature range	-40 to +70 °C	-40 to +70 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>		
Mains input connections L1, N	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded
Connections		
• Output +	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>
• Output -		
Dimensions (W x H x D) in mm	54 x 90 x 55	72 x 90 x 55
Weight	Approx. 0.17 kg	Approx. 0.25 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5

## LOGO!Power 24 V

### Overview



### Application

LOGO!Power supplies are primary switched-mode power supplies that are optimized to the LOGO! logic modules in terms of functionality and design. With the wide input range of 85 V to 264 V AC, radio interference level B and assembly option in built-in miniature distribution boards, they can be used universally in a diverse range of applications in the low-end performance range.


### Technical specifications

Power supply, type	24 V/1.3 A	24 V/2.5 A	24 V/4 A
Order No.	<b>6EP1 331-1SH02</b>	<b>6EP1 332-1SH42</b>	<b>6EP1 332-1SH51</b>
<b>Input</b>	Single-phase AC	Single-phase AC	Single-phase AC
Rated voltage $V_{in \text{ rated}}$	<b>100 to 240 V AC</b>	<b>100 to 240 V AC</b>	<b>100 to 240 V AC</b>
Voltage range	wide-range input 85 to 264 V AC	wide-range input 85 to 264 V AC	wide-range input 85 to 264 V AC
Overvoltage strength	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$	$2.3 \times V_{in \text{ rated}}/1.3 \text{ ms}$
Mains buffering at $I_{out \text{ rated}}$	> 40 ms at $V_{in} = 187 \text{ V}$	> 40 ms at $V_{in} = 187 \text{ V}$	> 40 ms at $V_{in} = 187 \text{ V}$
Rated line frequency; range	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz	50/60 Hz; 47 to 63 Hz
Rated current $I_{in \text{ rated}}$	0.7 to 0.35 A	1.22 to 0.66 A	1.95 to 0.97 A
Inrush current limitation (+25 °C)	< 15 A	< 30 A	< 30 A
$I^2t$	< 0.8 A <sup>2</sup> s	< 3 A <sup>2</sup> s	< 2.5 A <sup>2</sup> s
Integrated line-side fuse	Internal	Internal	Internal
Recommended circuit-breaker (IEC 898) in mains supply line	From 16 A Characteristic B or from 10 A Characteristic C	From 16 A Characteristic B or from 10 A Characteristic C	From 16 A Characteristic B or from 10 A Characteristic C
<b>Output</b>	Stabilized, floating direct voltage	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>24 V DC</b>	<b>24 V DC</b>	<b>24 V DC</b>
Total tolerance, static	± 3 %	± 3 %	± 3 %
• Static mains compensation	Approx. 0.1 %	Approx. 0.1 %	Approx. 0.1 %
• Static load compensation	Approx. 1.5 %	Approx. 1.5 %	Approx. 1.5 %
Residual ripple (clock frequency approx. 90 kHz)	< 200 mV <sub>pp</sub>	< 200 mV <sub>pp</sub>	< 200 mV <sub>pp</sub>
Spikes (bandwidth approx. 20 MHz)	< 300 mV <sub>pp</sub>	< 300 mV <sub>pp</sub>	< 300 mV <sub>pp</sub>
Setting range	22.2 to 26.4 V	22.2 to 26.4 V	22.2 to 26.4 V
Status display	Green LED for output voltage OK	Green LED for output voltage OK	Green LED for output voltage OK
Power ON/OFF behavior	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)	No overshoot of $V_{out}$ (soft start)
Starting delay/voltage rise	< 0.5 s/typ. 15 ms	< 0.5 s/typ. 10 ms	< 0.5 s/typ. 35 ms
Rated current $I_{out \text{ rated}}$	<b>1.3 A</b>	<b>2.5 A</b>	<b>4 A</b>
Current range up to +55 °C	0 to 1.3 A	0 to 2.5 A	0 to 4 A
Parallel connection for increased output	Yes	Yes	Yes

Continued on page 13/9.

Power supply, type	24 V/1.3 A	24 V/2.5 A	24 V/4 A
<b>Order No.</b>	<b>6EP1 331-1SH02</b>	<b>6EP1 332-1SH42</b>	<b>6EP1 332-1SH51</b>
<b>Efficiency</b>			
Efficiency at $V_{out\ rated}$ , $I_{out\ rated}$	typ. 82 %	typ. 87 %	typ. 89 %
Power loss at $V_{out\ rated}$ , $I_{out\ rated}$	typ. 7 W	typ. 9 W	typ. 12 W
<b>Control</b>			
Dyn. mains compensation ( $V_{in\ rated} \pm 15\%$ )	< 0.2 % $V_{out}$	< 0.2 % $V_{out}$	< 0.2 % $V_{out}$
Dyn. load compensation ( $I_{out}$ : 10/90/10 %)	$\pm 1.5\%$ $V_{out}$	$\pm 1.5\%$ $V_{out}$	$\pm 1.5\%$ $V_{out}$
<b>Settling time</b>			
• Load step from 10 to 90 %	typ. 20 ms	typ. 20 ms	typ. 20 ms
• Load step from 90 to 10 %	typ. 20 ms	typ. 20 ms	typ. 20 ms
<b>Protection and monitoring</b>			
Current limitation	typ. 2 A	typ. 3.4 A	typ. 4.7 A
Short-circuit protection	Stabilized current characteristic	Stabilized current characteristic	Stabilized current characteristic
RMS sustained short-circuit current	< 4 A	< 8 A	< 10 A
Overload/short-circuit indicator	-	-	-
<b>Safety</b>			
Galvanic isolation primary/secondary	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178	Yes, SELV output voltage $V_{out}$ acc. to EN 60950 and EN 50178
Protective class	Class II (without PE conductor)	Class II (without PE conductor)	Class II (without PE conductor)
CE marking	Yes	Yes	Yes
UL/cUL (CSA) approval	Yes, cULus listed (UL 508, CSA 22.2), File E197259; cURus rec- ognized (UL 60950, CSA 22.2), File E151273	Yes, cULus listed (UL 508, CSA 22.2), File E197259; cURus rec- ognized (UL 60950, CSA 22.2), File E151273	Yes, cULus listed (UL 508, CSA 22.2), File E197259; cURus rec- ognized (UL 60950, CSA 22.2), File E151273
FM approval	Yes, Class I Div. 2, Group A, B, C, D T4	Yes, Class I Div. 2, Group A, B, C, D T4	Available soon
Appr. for use in marine vessels	Yes, GL, ABS	Yes, GL, ABS	Yes, ABS
Degree of protection (EN 60529)	IP20	IP20	IP20
<b>EMC</b>			
Interference emission	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B
Line harmonics limitation	Not applicable	Not applicable	EN 61000-3-2
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
<b>Operating specifications</b>			
Ambient temperature range	-20 to +55 °C with natural convection	-20 to +55 °C with natural convection	-20 to +55 °C with natural convection
Transportation and storage temperature range	-40 to +70 °C	-40 to +70 °C	-40 to +70 °C
Humidity rating	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation	Climatic class 3K3 acc. to EN 60721, no condensation
<b>Mechanical specifications</b>			
Mains input connections L1, N	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded	One screw-type terminal each for 0.5 to 2.5 mm <sup>2</sup> single- core/finely stranded
Connections			
• Output +	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>	2 screw-type terminals each for 0.5 to 2.5 mm <sup>2</sup>
• Output -			
Dimensions (W x H x D) in mm	54 x 90 x 55	72 x 90 x 55	90 x 90 x 55
Weight	Approx. 0.17 kg	Approx. 0.25 kg	Approx. 0.34 kg
Mounting	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5	Snap-mounting on DIN rail EN 50022-35x15/7.5



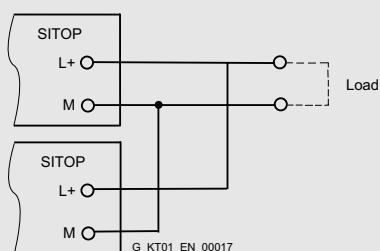

- 14/2 Power supplies general
- 14/2 Stabilized DC power supplies
- 14/5 Mains specifications, line-side connection
- 14/9 Possible system disturbances and causes
- 14/10 Mounting, mounting areas and fixing options
- 14/11 Planning aids
- 14/12 Parallel connection for redundant operation and performance enhancement
- 14/14 Series connection to increase the voltage
- 14/15 Battery charging
- 14/15 Fusing of the output circuit, selectivity



## Power supplies general

### Power supplies

In plant construction or mechanical engineering, or in any other situations in which electrical controls are used, a safe and reliable power supply is needed to supply the process with power.

The functional reliability of electronic controls and therefore the reliable operation of automated installations is extremely closely linked to the resistance of the load power supply to failure. Final control elements as well as input and output modules will only respond to command signals if the power supply is operating reliably.

In addition to general requirements such as reliability, particular demands are placed on the electromagnetic compatibility (EMC) of the power supply with reference to the tolerance range of the output voltage as well as its ripple.

Important factors that determine problem-free implementation are, in particular:

- An input current with a low harmonic content
- Low emitted interference and
- Adequate immunity (noise immunity) to interference

### General notes on DC power supplies

The DC power supply is a static device with one or more inputs and one or more outputs that converts a system of AC voltage and AC current and/or DC voltage and DC current to a system with different values of DC voltage and DC current by means of

EMC	Types of interference
Emission (emitted interference)	Interference caused by television and radio reception Interference coupling with data lines or power supply cables
Immunity (immunity to interference)	Faults on the power cable due to switching non-resistive loads such as motors or contactors Static discharge due to lightning strikes Electrostatic discharge through the human body Conducted noise induced by radio frequencies

Certain disturbing phenomena

electromagnetic induction for the purpose of transmitting electrical energy.


The type of construction of a DC power supply is usually decided by its intended use.

### Unstabilized DC power supplies

The AC mains voltage is transformed using 50 Hz/60 Hz safety transformers to a protective extra-low voltage and smoothed with down-circuit rectification and capacitor filtering.

In the case of unstabilized DC power supplies, the DC output voltage is not stabilized at a specific value, but the value is varied in accordance with the variation in (mains) input voltage and the loading.

The ripple is in the Volt range and is dependent on the loading. The value for the ripple is usually specified as a percentage of the DC output voltage level. Unstabilized DC power supplies are characterized by their rugged, uncomplicated design that is limited to the important factors and focussed on a long service life.

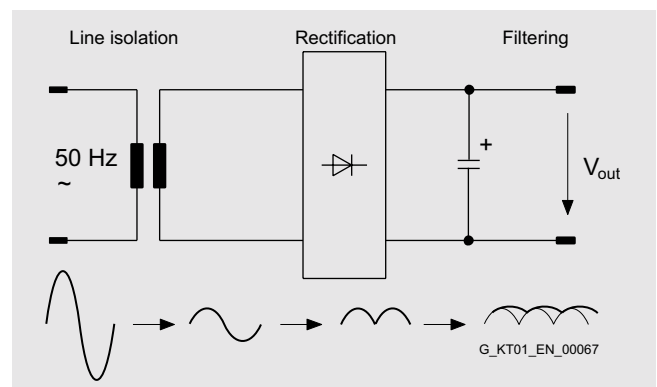

Block diagram of an unstabilized power supply

### Stabilized DC power supplies

Stabilized DC power supplies have electronic regulation circuits that maintain the DC voltage at the output at a specific value with as little variation as possible. Effects such as variation in input voltage or changes in load at the output are electrically compensated in the specified function area.

The ripple in the output voltage for stabilized DC power supplies lies in the millivolt range and is mainly dependent on the loading at the outputs.


Stabilized DC power supplies can be implemented on different functional principles. The most common types of circuit are:

- Linear stabilized power supplies
- Magnetic voltage stabilizer
- Secondary pulsed switched-mode power supplies
- Primary pulsed switched-mode power supplies

The most suitable principle for a particular application case will depend mainly on the application. The objective is to generate a DC voltage to supply the specific load as inexpensively and as accurately as possible.

### Stabilized DC power supplies (continued)

#### Linear stabilized power supplies

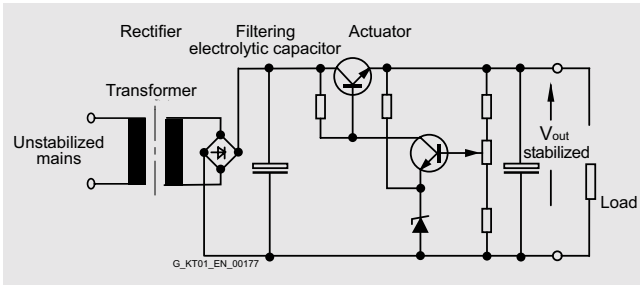

Block diagram: Linear regulator

The linear regulator operates according to a conventional principle. The supply is provided from an AC supply system (one, two or three conductor supply).

A transformer is used to adapt it to form the required secondary voltage.

The rectified and filtered secondary voltage is converted into a stabilized voltage at the output by a regulation section. The regulation section comprises a final control element and a control amplifier. The difference between the stabilized output voltage and the unstabilized voltage at the filter capacitor is converted into a thermal loss in the final control element. The final control element functions in this case like a rapidly changeable ohmic impedance. The thermal loss that arises in each case is the product of output current and voltage drop over the final control element.

This system is extremely adaptable. Even without any further modifications, several output voltages are possible. In the case of multiple outputs, the individual secondary circuits are generated from separate secondary windings of the input transformer. Some applications can only be resolved in accordance with this circuit principle. Especially when highly accurate regulation, minimal residual ripple and fast compensation times are required.

The efficiency is, however, poor and the weight and volume are considerable. The linear regulator is therefore only an economical alternative at low power ratings.


#### Advantages:

- Simple, well-proven circuit principle
- Good to excellent control characteristics
- Fast settling time

#### Disadvantages:

- Relatively high weight and large volume due to the 50 Hz transformer
- Poor efficiency, heat dissipation problems
- Low storage time

#### Magnetic stabilizer

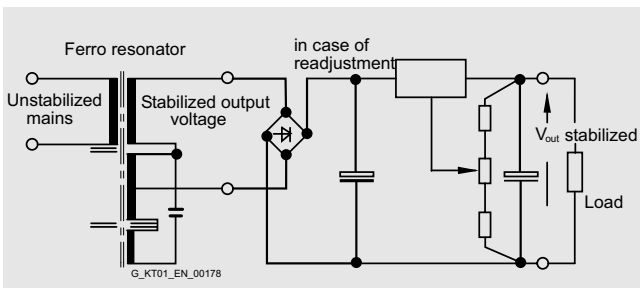

Block diagram: Magnetic stabilizer

The complete transformer comprises two components. The so-called "ferro resonator" and a series connected auxiliary regulation section. The input winding and the resonance winding of the magnetic stabilizer are decoupled to a large extent by means of the air gap. The magnetic stabilizer supplies a well-stabilized AC voltage. This is rectified and filtered. The transformer itself is operated in the saturation range.

The ferro resonator frequently has a linear regulator connected to the output to improve the control accuracy. Secondary pulsed switched-mode regulators are frequently also connected to the output.

The magnetic stabilizer technique is reliable and rugged but is also large-volume, heavy and relatively expensive.


#### Advantages:

- Good to excellent control characteristics in combination with series connected linear regulators
- Significantly better efficiency than a linear regulator alone

#### Disadvantages:

- The ferro resonator is frequency dependent
- The power supplies are large and heavy due to the magnetic components

#### Secondary pulsed switched-mode power supplies:

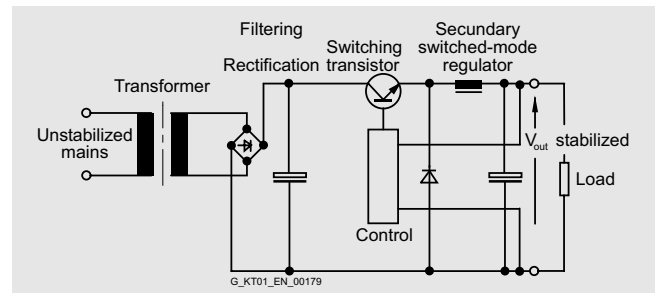

Block diagram: Secondary pulsed switched-mode power supply

Isolation from the supply system is implemented in this case with a 50 Hz transformer. Following rectification and filtering, the energy is switched at the output by means of pulsing through a switching transistor in the filtering and storage circuit. Thanks to the transformer at the input, that acts as an excellent filter, the mains pollution is low. The efficiency of this circuit is extremely high.

This concept offers many advantages for power supplies with numerous different output voltages.

To protect the connected loads, however, care must be taken; in the event of the switching transistor breaking down, the full, unstabilized DC voltage of the filter capacitor will be applied to the output. This danger, however, also exists in the case of linear stabilized power supplies.

#### Advantages:

- Simple design and high efficiency
- Multiple outputs, also galvanically isolated from one another, are easily implemented by means of several secondary windings
- Fewer problems with interference than with primary pulsed switched-mode power supplies

#### Disadvantages:


- The 50 Hz transformer makes the power supplies relatively large and heavy
- The output ripple (spikes) correspond to those of a primary pulsed switched-mode power supply

## Stabilized DC power supplies

### Stabilized DC power supplies (continued)

#### Primary pulsed switched-mode power supplies:

In other literature, the term SMPS (Switch Mode Power Supply) or primary switched-mode regulator is often used.

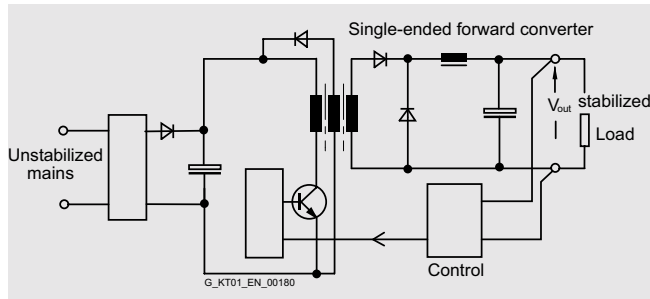

Block diagram: Single-ended forward converter

The primary switched-mode regulators are available in many different circuit variants. The most important basic circuits are single-ended forward converters, flyback converters, half-bridge converters, full-bridge converters, push-pull converters and resonance converters.

The general principle of operation of the primary switched-mode regulator is shown in the block diagram of the single-ended forward converters.

The unstabilized supply voltage is first rectified and filtered. The capacitance of the capacitor in the DC link determines the storage time of the power supply on failure of the input voltage. The voltage at the DC link is approximately 320 V DC for a 230 V supply. A single-ended converter is then supplied with this DC voltage and transfers the primary energy through a transformer to the secondary side with the help of a pulse width regulator at a high switching frequency. The switching transistor has low power losses when functioning as a switch, so that the power balance lies between > 70 % and 90 % depending on the output voltage and current.

The volume of the transformer is small in comparison with a 50 Hz transformer due to the high switching frequency because the transformer size taking into account the higher switching frequency is smaller. Using modern semiconductors, switching frequencies of 100 kHz and above can be achieved. At excessively high switching frequencies, the switching losses increase, so that in each case a compromise has to be made between a high efficiency and the largest possible switching frequency. In most applications, the switching frequencies lie between 20 kHz and 250 kHz depending on the output power.

The voltage from the secondary winding is rectified and filtered. The system deviation at the output is fed back to the primary circuit through an optocoupler. By controlling the pulse width (conducting phase of the switching transistor in the primary circuit), the necessary energy is transferred to the secondary circuit and the output voltage is regulated. During the non-conducting phase of the switching transistor, the transformer is demagnetized through an auxiliary winding. Just enough energy is transferred as is removed at the output.

The maximum pulse width for the pulse/pause ratio for these circuits is < 50 %.

#### Advantages:

- Small magnetic components (transformer, storage reactor, filter) thanks to the high operating frequency
- High efficiency thanks to pulse width regulation
- Compact equipment units
- Forced-air cooling is not necessary up to the kW range
- High storage times are possible on mains failure by increasing the capacitance in the DC link
- Larger input voltage range is possible

#### Disadvantages:

- High cost circuit, many active components
- Higher costs for interference suppression
- The mechanical design must be in accordance with HF criteria

Primary switched-mode power supplies have become more and more popular over the last few years. Especially due to the small size, low weight, high efficiency and excellent price/performance ratio.

#### Summary

The most important characteristics of the circuit types described above are summarized in Table 2.

Comparison criteria	Circuit types			
	Primary switched-mode	Secondary switched-mode	Linear regulator	Magnetic stabilizer
Input voltage range	Very large	Medium	Very small	Large
Regulation speed	Medium	Medium	Very fast	Slow
Storage time after power failure	Very long	Long	Very short	Long
Residual ripple	Medium	Medium	Very low	Medium
Power loss	Very small	Small	Large	Very small
Frame size	Very small	Medium	Very large	Large
Weight	Very light	Medium	Heavy	Very heavy
Interference suppression costs	Very large	Medium	Low	Medium

Comparison criteria for basic circuit variants

### Supply system data

When dimensioning and selecting plant components, the mains data, mains conditions and the operating modes must be taken into account for these components.

The most important data for a supply system is the rated voltage and rated frequency. These data for the supply system are designated as rated values in accordance with international agreements.

#### Rated voltage and rated frequency

Since May 1987, the standard DIN IEC 60038 "IEC rated voltages" has been applicable in the Federal Republic of Germany.

The international standard IEC 60038, Edition 6, 1983, "IEC standard voltages" has been included in this standard unmodified.

The IEC 60038 standard is the result of an international agreement to reduce the diverse rated voltage values that are in use for electrical supply networks and traction power supplies, load installations and equipment.

#### Conversion of low-voltage supply systems

In the low-voltage range, it is emphasized in IEC 60038 that 220/380 V and 240/415 V voltage values for three-phase electricity supplies have been replaced by a single internationally standardized value of 230/400 V.

The tolerances for the rated voltages of the supply systems that were specified for the transition period up to 2003 were intended to ensure that equipment rated for the previous voltages could be operated safely until the end of its service life.

Year	Rated voltage	Tolerance range
Up to 1987	220 V/380 V	-10 % to +10 %
From 1988 to 2003	230 V/400 V	-10 % to + 6 %
From 2003	230 V/400 V	-10 % to +10 %

Conversion of low-voltage supply systems

The IEC recommendations have been implemented as national regulations in the most important countries, as far as the conditions in the country allow.

### International supply voltages and frequencies in low-voltage supply systems

Country	Mains voltage
<b>Western Europe:</b>	
Belgium	50 Hz 230/400 – 127-220 V
Denmark	50 Hz 230/400 V
Germany	50 Hz 230/400 V
Finland	50 Hz 230/400-500 <sup>1)</sup> – 660 <sup>1)</sup> V
France	50 Hz 127/220 – 230/400 – 500 <sup>1)</sup> – 380/660 <sup>1)</sup> – 525/910 <sup>1)</sup> V
Greece	50 Hz 230/400 – 127/220 <sup>2)</sup> V
Great Britain	50 Hz (230/400 V) <sup>3)</sup>
Ireland	50 Hz 230/400 V
Iceland	50 Hz 127/220 <sup>2)</sup> – 230/400 V
Italy	50 Hz 127/220 – 230/400 V
Luxembourg	50 Hz 230/400 V
Netherlands	50 Hz 230/400 – 660 <sup>1)</sup> V
Northern Ireland	50 Hz 230/400 – Belfast 220/380 V
Norway	50 Hz 230-230/400-500 <sup>1)</sup> – 690 <sup>1)</sup> V
Austria	50 Hz 230/400 – 500 <sup>1)</sup> – 690 <sup>1)</sup> V
Portugal	50 Hz 230/400 V
Sweden	50 Hz 230/400 V
Switzerland	50 Hz 230/400 – 500 <sup>2)</sup> V
Spain	50 Hz 230/400 V
<b>Eastern Europe:</b>	
Albania	50 Hz 230/400 V
Bulgaria	50 Hz 230/400 V
Russian Federation	50 Hz 230/400 – 690 <sup>1)</sup> V
Croatia	50 Hz 230/400 V
Poland	50 Hz 230/400 V
Rumania	50 Hz 230/400 V
Serbia	50 Hz 230/400 V
Slovakia	50 Hz 230/400 – 500 <sup>1)</sup> – 690 <sup>1)</sup> V
Slovenia	50 Hz 230/400 V
Chechnya	50 Hz 230/400 – 500 <sup>1)</sup> – 690 <sup>1)</sup> V
Hungary	50 Hz 230/400 V

1) Industry only.

2) No further expansion.

3) From 2003.

# Technical information and configuration

## Mains specifications, line-side connection

### International supply voltages and frequencies in low-voltage supply systems (continued)

Country	Mains voltage
<b>Middle-East:</b>	
Afghanistan	50 Hz 220/380 V
Bahrain	50 Hz 230/400 V
Cyprus	50 Hz 240/415 V
Iraq	50 Hz 220/380 V
Israel	50 Hz 230/400 V
Jordan	50 Hz 220/380 V
Kuwait	50 Hz 240/415 V
Lebanon	50 Hz 110/190 – 220/380 V
Oman	50 Hz 220/380 – 240/415 V
Qatar	50 Hz 240/415 V
Saudi Arabia	60 Hz 127/220 – 220/380 – 480 <sup>1)</sup> V (220/380 – 240/415 V 50 Hz: remainder only)
Syria	50 Hz 115/200 – 220/380 – 400 <sup>1)</sup> V
Turkey	50 Hz 220/380 V (parts of Istanbul: 110/190 V)
United Arab Emirates (Abu Dhabi; Ajman; Dubai; Fujayrah; Ras al Khaymah; Sharjah; Um al Qaywayn)	50 Hz 220/380 – 240/415 V
Yemen (North)	50 Hz 220/380 V
Yemen (South)	50 Hz 230/400 V
<b>Far East:</b>	
Bangladesh	50 Hz 230/400 V
Burma	50 Hz 230/400 V
Peoples Republic of China	50 Hz 127/220 – 220/380 V (in mining: 1140 V)
Hong Kong	50 Hz 200/346 V
India	50 Hz 220/380 – 230/400 – 240/415 V
Indonesia	50 Hz 127/220 – 220/380 – 400 <sup>1)</sup> V
Japan	50 Hz 100/200 – 400 <sup>1)</sup> V
South Honshu, Shikoku, Kyushu, Hokkaido, North Honshu	60 Hz 110/220 – 440 <sup>1)</sup> V
Cambodia	50 Hz 120/208 V – Phnom Penh 220/238 V
Korea (North)	60 Hz 220/380 V
Korea (South)	60 Hz 100/200 <sup>2)</sup> – 220/380 – 440 <sup>1)</sup> V
Malaysia	50 Hz 240/415 V
Peoples Republic of Mongolia	50 Hz 220/380 V
Pakistan	50 Hz 230/400 V
Philippines	60 Hz 110/220 – 440 V
Singapore	50 Hz 240/415 V
Sri Lanka	50 Hz 230/400 V
Taiwan	60 Hz 110/220 – 220 – 440 V
Thailand	50 Hz 220/380 V
Vietnam	50 Hz 220/380 V
<b>North America:</b>	
Canada	60 Hz 600 – 120/240 – 460 – 575 V
USA	60 Hz 120/208 – 120/240 – 277/480 – 600 <sup>1)</sup> V
<b>Central America:</b>	
Bahamas	60 Hz 115/200 – 120/208 V
Barbados	50 Hz 110/190 – 120/208 V
Belize	60 Hz 110/220 – 220/440 V
Costa Rica	60 Hz 120/208 <sup>2)</sup> – 120/240 – 127/220 – 254/440 <sup>2)</sup> – 227/480 <sup>1)</sup> V
Dominican Republic	60 Hz 120/208 – 120/240 – 480 <sup>1)</sup> V

1) Industry only.

2) No further expansion.

### International supply voltages and frequencies in low-voltage supply systems (continued)

Country	Mains voltage
<b>Central America (continued):</b>	
Guatemala	60 Hz 120/208 – 120/240 – 127/220 – 277/480 <sup>1)</sup> – 480 <sup>1)</sup> – 550 <sup>1)</sup> V
Haiti	50 Hz 220/380 V (Jacmel), 60 Hz 110/220 V
Honduras	60 Hz 110/220 – 127/220 – 277/480 V
Jamaica	50 Hz 110/220 – 440 <sup>1)</sup> V
Cuba	60 Hz 120/240 – 220/380 – 277/480 <sup>1)</sup> – 440 <sup>1)</sup> V
Mexico	60 Hz 127/220 – 440 <sup>1)</sup> V
Nicaragua	60 Hz 110/220 – 120/240 – 127/220 – 220/440 – 254/40 <sup>1)</sup> V
Panama	60 Hz 120/208 <sup>1)</sup> – 120/240 – 254/440 <sup>1)</sup> – 277/480 <sup>1)</sup> V
Puerto Rico	60 Hz 120/208 – 480 V
El Salvador	60 Hz 110/220 – 120/208 – 127/220 – 220/440 – 240/480 <sup>1)</sup> – 254/440 <sup>1)</sup> V
Trinidad	60 Hz 110/220 – 120/240 – 230/400 V
<b>South America:</b>	
Argentina	50 Hz 220/380 V
Bolivia	60 Hz 220/380 – 480 V, 50 Hz 110/220 – 220/380 V (exception)
Brazil	60 Hz 110/220 – 220/440 – 127/220 – 220/380 V
Chile	50 Hz 220/380 V
Ecuador	60 Hz 120/208 – 127/220 V
Guyana	50 Hz 110/220 V (Georgetown), 60 Hz 110/220 – 240/480 V
Columbia	60 Hz 110/220 – 150/260 – 440 V
Paraguay	60 Hz 220/380 – 220/440 V
Peru	60 Hz 220 – 220/380/440 V
Surinam	60 Hz 115/230 – 127/220 V
Uruguay	50 Hz 220 V
Venezuela	60 Hz 120/208 – 120/240 – 208/416 – 240/480 V
<b>Africa:</b>	
Egypt	50 Hz 110/220 – 220/380 V
Ethiopia	50 Hz 220/380 V
Algeria	50 Hz 127/220 – 220/380 V
Angola	50 Hz 220/380 V
Benin	50 Hz 220/380 V
Ivory Coast	50 Hz 220/380 V
Gabon	50 Hz 220/380 V
Ghana	50 Hz 127/220 – 220/380 V
Guinea	50 Hz 220/380 V
Kenya	50 Hz 220/380 V
Cameroon	50 Hz 127/220 – 220/380 V
Congo	50 Hz 220/380 V
Liberia	60 Hz 120/208 – 120/240 V
Libya	50 Hz 127/220 <sup>2)</sup> – 220/380 V
Madagascar	50 Hz 127/220 – 220/380 V
Malawi	50 Hz 220/380 V
Mali	50 Hz 220/380 V
Morocco	50 Hz 115/200 – 127/220 – 220/380 – 500 <sup>1)</sup> V
Mauritius	50 Hz 240/415 V
Mozambique	50 Hz 220/380 V
Namibia	50 Hz 220/380 V
Niger	50 Hz 220/380 V

1) Industry only.

2) No further expansion.

## Mains specifications, line-side connection

### International supply voltages and frequencies in low-voltage supply systems (continued)

Country	Mains voltage
<b>Africa (continued):</b>	
Nigeria	50 Hz 220/415 V
Rwanda	50 Hz 220/380 V
Zambia	50 Hz 220/380 V – 415 – 550 <sup>1)</sup> V
Senegal	50 Hz 127/220 – 220/380 V
Sierra Leone	50 Hz 220/380 V
Somalia	50 Hz 220-220/440 V
Sudan	50 Hz 240/415 V
South Africa	50 Hz 220/380 – 500 <sup>1)</sup> – 550/950 <sup>1)</sup> V
Swaziland	50 Hz 220/380 V
Tanzania	50 Hz 230/400 V
Togo	50 Hz 127/220 – 220/380 V
Tunisia	50 Hz 115/200 – 220/380 V
Uganda	50 Hz 240/415 V
Zaire	50 Hz 220/380 V
Zimbabwe	50 Hz 220/380 V

### Connection and fusing on the line side

All SITOP and LOGO!Power supplies are built-in devices. For installation of the devices, the relevant DIN/VDE specifications or country-specific regulations must be taken into account. The supply voltage must be connected in accordance with VDE 0100 and VDE 0160. On installation, protective gear and isolating gear must be provided for disconnecting the power supply.

Power supply units cause a current inrush immediately after application of the input voltage due to charging of the load capacitor; it soon falls back to the rated input current level after a few milliseconds. Aside from the internal impedances of the power supply, the current inrush is largely dependent on the size of the input voltage applied as well as the source impedance of the supply network and the line impedance of the supply line. The maximum current inrush for SITOP power supplies is specified in the applicable technical data. It is important for dimensioning up-circuit protective devices.

Single-phase SITOP and LOGO!Power supplies are equipped with internal device protection (fuses). For connection to the

supply system, only one protective device (fuse or circuit-breaker) must be provided for conductor protection in accordance with the current rating of the installed cable. The circuit-breakers recommended in the data sheets and operating instructions have been selected such that even during the maximum current inrush that can occur under worst case conditions on switching on the supply voltage, the circuit-breaker will not trip.

Three-phase SITOP power supplies do not have internal device protection. The up-circuit protective device (three-phase coupled miniature circuit-breaker or motor protection switch) protects the cables and devices. The protective devices specified in the data sheets and operating instructions are optimized to the characteristics of the relevant power supplies.

### Overview

The quality of the mains voltage has become a decisive factor in the functioning, reliability, maintenance costs and service life of highly sensitive electronic installations and devices (computers, industrial controls, instrumentation, etc.).

Mains disturbances cause system failures and affect the function of plants as well as electronic consumers. They can also result in total failure of the installation or equipment.

The most frequent types of disturbance are:

- Long-term overvoltages
- Long-term undervoltages
- Burst interference and transients
- Voltage reduction and surges
- Electrical noise
- Momentary mains breaks
- Long-term mains breaks

Disturbances in mains voltages can occur individually or in combination. Possible reasons for these disturbances and reactions can be:

Mains disturbances can be caused by a number of things, e.g.:

- Switching operations in the supply system
- Long cable paths in the supply system
- Environmental influences, such as storms
- Mains overloads

Typical causes of mains disturbances generated in-house are:

- Thyristor-controlled drives
- Lifts, air-conditioning, photocopiers
- Motors, power factor correction equipment
- Electrical welding, large machines
- Switching of lighting equipment

Mains disturbances	Percentage of total disturbance	Effect
<b>Overvoltage</b> Over a long period, the mains voltage is exceeded by more than +6% (acc. to DIN IEC 60038)	approx. 15% - 20%	Can result in overheating and even thermal destruction of individual components. Causes total failure.
<b>Undervoltage</b> Over a long period, the mains voltage is reduced by more than 10% (acc. to DIN IEC 60038)	approx. 20% - 30%	Can result in undefined operating states for loads. Causes data errors.
<b>Burst interference</b> Energy-rich impulses (e.g. 700 V/1 ms) and energy-poor transients (e.g. 2500 V/20 μs) result from switching operations in the supply system	approx. 30% - 35%	Can result in undefined operating states for the loads and can lead to the destruction of components.
<b>Voltage reduction and surges</b> The voltage level changes suddenly and in an uncontrolled manner, e.g. due to changes in loading and long cable runs	approx. 15% - 30%	Can result in undefined operating states and destruction of components. Causes data errors.
<b>Electrical noise</b> A mix of frequencies superimposed on the mains due to bad grounding and/or strong HF emitters, such as television transmitters or storms	approx. 20% - 35%	Can result in undefined operating states for loads. Causes data errors.
<b>Voltage interruption</b> Short-term interruption of the mains voltage (up to 10 ms), due to short-circuiting in neighboring supply systems or starting of large electrical machines	approx. 8% - 10%	Can result in undefined operating states for loads especially those with insufficient mains buffering. Causes data errors.
<b>Voltage interruption</b> Long interruption of the mains voltage (longer than 10 ms)	approx. 2% - 5%	Can result in undefined operating states for loads especially those with insufficient mains buffering. Causes data errors.

Mains disturbances and effects

The SITOP product family offers a range of possibilities for minimizing or preventing the risk of mains disturbances at the planning stage.

# Technical information and configuration

## Mounting, Mounting areas and fixing options

### Mounting

All SITOP and LOGO!Power supplies are built-in devices. With the exception of the variants with IP65 degree of protection, the power supplies must be mounted vertically so that the air can enter the ventilation slots at the bottom of the devices and leave through the upper part of the devices. If the units are not mounted vertically (at your own risk), the ambient temperature

should not exceed +45 °C and the load current should not exceed approx. 50% of the rated current value. Variants with IP65 degree of protection can be mounted in any mounting position. The minimum distances specified in the corresponding operating manual for the top, bottom, and side of the devices must be observed to ensure free air convection.

### Mounting areas and fixing options

Power supply	Order No.	Required mounting area in mm (W x H)	Mounting on a standard rail acc. to DIN EN 50022		Wall mounting
			35 x 7.5 mm	35 x 15 mm	
<b>SITOP power 24 V, one-phase and two-phase power supplies</b>					
24 V/0.5 A	6EP1331-2BA10	22.5 x 180	X	X	
24 V/0.375 A	6EP1731-2BA00	22.5 x 180	X	X	
24 V/2 A	6EP1331-2BA00	50 x 225	X	X	
	6ES7307-1BA00-0AA0	50 x 205		1)	
	6ES7305-1BA80-0AA0	80 x 225		1)	
	6EP1732-0AA00	80 x 235		X	X
24 V/2.5 A	6EP1332-1SH12	80 x 335		X	X
24 V/3.5 A	6EP1332-1SH31	160 x 280	X	X	X
24 V/4 A	6EP1332-1SH22	80 x 335		X	X
24 V/5 A	6EP1333-3BA00	70 x 225	X	X	
	6EP1333-2BA00	75 x 225	X	X	
	6EP1333-2AA00	75 x 225	X	X	
	6ES7307-1EA00-0AA0	80 x 205		1)	
	6ES7307-1EA80-0AA0	80 x 225		1)	
	6EP1333-1AL12	160 x 230	X	X	
24 V/10 A	6EP1334-3BA00	90 x 225	X	X	
	6EP1334-2BA00	100 x 225	X	X	
	6EP1334-2AA00	100 x 225	X	X	
	6EP1334-2CA00	160 x 290			X
	6ES7307-1KA01-0AA0	120 x 205		1)	
	6EP1334-1AL12	160 x 230	X	X	
	6EP1334-1SH01	200 x 325		X	
24 V/20 A	6EP1336-3BA00	160 x 225	X	X	
	6EP1336-2BA00	320 x 225	X	X	
	6EP1536-2AA00	320 x 280	X	X	
24 V/40 A	6EP1337-3BA00	240 x 225	X	X	
<b>SITOP power 24 V, three-phase power supplies</b>					
24 V/10 A	6EP1434-2BA00	320 x 225	X	X	
24 V/20 A	6EP1436-3BA00	160 x 225	X	X	
	6EP1436-2BA00	320 x 225	X	X	
24 V/30 A	6EP1437-2BA00	320 x 280	X	X	
24 V/40 A	6EP1437-3BA00	240 x 225	X	X	
	6EP1437-2BA10	320 x 280	X	X	
<b>SITOP power 24 V, uninterruptible power supplies</b>					
DC UPS 6 A (with serial interface / USB interface)	6EP1931-2DC21 (-2DC31/-2DC41)	50 x 225	X	X	
DC UPS 15 A (with serial interface / USB interface)	6EP1931-2EC21 (-2EC31/-2EC41)	50 x 225	X	X	
DC UPS 40 A	6EP1931-2FC01	280 x 290	X	X	

# Technical information and configuration

## Planning aids

Power supply	Order No.	Required mounting area in mm (W x H)	Mounting on a standard rail acc. to DIN EN 50022		Wall mounting
			35 x 7.5 mm	35 x 15 mm	
<b>SITOP power 24 V, uninterruptible power supplies</b>					
Battery module 2.5 Ah	6EP1935-6MD31	285 x 171	X	X	X
Battery module 3.2 Ah	6EP1935-6MD11	210 x 171	X	X	X
Battery module 7 Ah	6EP1935-6ME21	206 x 188			X
Battery module 12 Ah	6EP1935-6MF01	273 x 138			X
<b>SITOP power 24 V, additional components</b>					
Buffer module	6EP1961-3BA00	70 x 225	X	X	
Redundancy module	6EP1961-3BA20	70 x 225	X	X	
Diagnosis module	6EP1961-2BA00	72 x 190	X	X	
<b>SITOP power alternative voltages</b>					
3-52 V/120 W	6EP1353-2BA00	75 x 225	X	X	
2 x 15 V/3.5 A	6EP1353-0AA00	75 x 325	X	X	
48 V/20 A	6EP1457-3BA00	240 x 255	X	X	
<b>SITOP power AS interface</b>					
30 V/2.4 A	6EP1632-1AL01	260 x 80			X
30 V/7 A	6EP1354-1AL01	200 x 325		X	
<b>LOGO!Power supplies</b>					
5 V/3 A	6EP1311-1SH02	54 x 130	X	X	
12 V/1.9 A	6EP1321-1SH02	54 x 130	X	X	
15 V/1.9 A	6EP1351-1SH02	54 x 130	X	X	
24 V/1.3 A	6EP1331-1SH02	54 x 130	X	X	
5 V/6.3 A	6EP1311-1SH12	72 x 130	X	X	
12 V/4.5 A	6EP1322-1SH02	72 x 130	X	X	
15 V/4 A	6EP1352-1SH02	72 x 130	X	X	
24 V/2.5 A	6EP1332-1SH42	72 x 130	X	X	
24 V/4 A	6EP1332-1SH51	90 x 130	X	X	

1) With an additional mounting adapter.

### Planning aids

For planning and construction, operating manuals with mounting options, dimension drawings, and principle circuits with pin names in different file formats (suitable for CAD applications) are available for download on the Internet.

Additional information is available in the Internet under:



<http://www.siemens.com/automation/sitop>

## Parallel connection for redundant operation and performance enhancement

### Parallel connection for redundant operation

Two SITOP power supplies of the same type can be connected in parallel through diodes for a redundant configuration. Hundred percent redundancy only exists for two power supplies when the total load current is no higher than that which one power supply can supply alone and when the supply for the primary side is also implemented redundantly (i.e. a short-circuit on the primary side will not trigger a shared fuse which would disconnect both power supplies from the mains).

Parallel connection with decoupling diodes for redundant operation is permitted for all SITOP power supplies. The diodes V1 and V2 are used for decoupling. They must have a blocking voltage of at least 40 V and it must be possible to load them with a current equal to or greater than the maximum output current of the respective SITOP power supply. For diode dimensioning, see the following note "General information on selection of diodes".


As a simple alternative to diode dimensioning, the prepared add-on module "SITOP modular redundancy module" (Order No. 6EP1961-3BA20, see Section 8) is available for redundant connection of two power supplies.

#### General information on selection of diodes:

The diodes must be dimensioned for the maximum dynamic current. This can be the dynamic current during power-up in the short-circuit case or the dynamic current during a short-circuit in operation (the largest of the two values should be taken from the relevant technical specifications).

To dissipate the significant power losses of the decoupling diodes (current x diode conductive-state voltage), the diodes must be mounted on suitably dimensioned heat sinks.

An additional safety margin is recommended, because the output capacitor integral to the power supply generates an additional peak current in the short-circuit case. This additional current flows only for a few milliseconds which is a period (< 8.3 ms, so-called permissible surge current for diodes) in which diodes are permitted to be loaded with a multiple of the rated current.

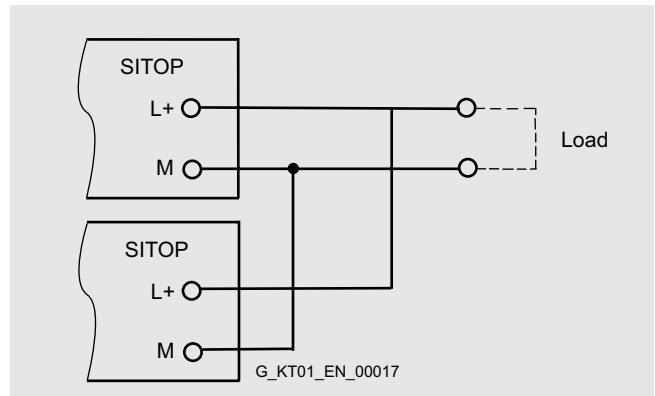

Parallel connection of two SITOP power supplies for redundant operation

#### Example 1

Two single-phase SITOP modular power supplies with 10 A rated output current (Order No.: 6EP1334-3BA00) are connected in parallel. The dynamic current in the event of a short-circuit during operation is approx. 30 A for 25 ms.

The diodes should therefore have a loading capability of 40 A to be safe, the common heat sink for both diodes must be dimensioned for the maximum possible current of approx. 24 A (RMS sustained short-circuit current) x diode conductive-state voltage.

#### Example 2

Two SITOP power supplies with 40 A rated output current (Order No. 6EP1437-2BA10) are connected in parallel. The dynamic current in the event of a short-circuit during operation is approx. 70 A for 600 ms, the RMS value is < 54 A.

The selected diodes should therefore have a loading capability of 100 A to be safe, the heat sink per diode must be dimensioned for the continuous possible current of 54 A x diode conductive-state voltage.

### Parallel connection for performance enhancement

To enhance performance, identical types of most SITOP power supplies can be connected in parallel galvanically (the same principle as parallel connection for redundant operation, but without decoupling diodes):

#### Advantage

The costs for mounting the diodes onto heat sinks and the not insignificant power losses of the decoupling diodes (current x diode conducting-state voltage) are avoided.

The types permitted for direct galvanic parallel connection are listed in the relevant technical specifications under "Output, parallel connection for performance enhancement".

#### Precondition

- The output cables connected to terminals L+ and M of every SITOP power supply should be installed with an identical length and cross-section (or the same impedance) to the common external linking point.

- The SITOP power supplies connected in parallel must be switched simultaneously using a common switch in the mains supply line (e.g. using the main switch available in control cabinets).
- The output voltages of the power supplies must be measured under no-load operation before they are connected in parallel and are permitted to differ by up to 50 mV. This usually corresponds to the factory default setting. If the output voltage is changed in the case of variable power supplies, the M terminals should first be connected and then the voltage difference between the L+ output terminals measured under no-load conditions before these are connected. This voltage difference must not exceed 50 mV.

#### Note

With a direct galvanic connection in parallel of more than two SITOP power supplies, further circuit measures may be necessary for short-circuit and overload protection!

### Parallel connection for redundant operation and for performance enhancement

#### Almost 100% redundancy

Using the types permitted for direct galvanic parallel connection (see the relevant technical specifications under "Output, parallel connection for performance enhancement"), the performance can be increased without the need for decoupling diodes and redundancy of almost 100% can be implemented by direct galvanic parallel connection of an additional power supply of the same type to the power supplies required to satisfy the performance requirements. This means that at least one more power supply is required than is necessary for the sum of all load currents.

A decoupling diode is normally required for redundancy to ensure that a power supply that has failed as a result of short-circuiting of the outputs (especially as a result of short-circuiting the output electrolytic capacitor) does not also short-circuit the power supply that remains intact. A redundancy of almost 100% can be implemented with this type of circuit.

#### Example

A load current of up to 40 A is required, the power supply must operate on both 400 V and 500 V three-phase supplies (without switch-over).

The three-phase 20 A SITOP modular power supply (Order No.: 6EP1436-3BA00) is suitable for this purpose. For load currents up to 40 A, direct galvanic parallel connection of two SITOP modular power 20 supplies is necessary. By connecting another SITOP modular 20 in parallel, performance enhancement and redundancy are implemented simultaneously (if one of the three power supplies fails to supply an output voltage, the remaining two 20 A power supplies are capable of supplying a total load current of 40 A).

#### Note

With a direct galvanic connection in parallel of more than two SITOP power supplies, further circuit measures may be necessary for short-circuit and overload protection!

## Series connection to increase the voltage

### Series connection to increase the voltage

To generate a load voltage of e.g. 48 V DC, two 24 V SITOP power supplies of the same type can be connected in series. The SITOP outputs L+ and M are isolated up to at least 60 V DC against PE (air gaps and creepage distances as well as radio interference suppression capacitors on L+ and M against PE), so that with this type of series connection (see Figure), the following points can be earthed:


- M of the lower power supply (results in +48 V DC against PE)
- Midway M/L+ between both power supplies (results in  $\pm 24$  V DC against PE)
- L+ of the upper power supply (results in -48 V DC against PE)

#### Note:

If two devices are connected in parallel, it cannot be guaranteed that the voltage will remain below maximum permissible SELV voltage of 60 V DC in the event of a fault.

The purpose of diodes V1 and V2 is to protect the electrolytic output capacitor integrated in the power supply against reverse voltages  $> 1$  V. As a result of the not absolutely simultaneous power-up (even when a common mains switch is used for switching on, differences of a few tens of milliseconds can occur between the various start-up delays), the SITOP power which starts up more quickly supplies current from output L+ to the M output of the slower SITOP power whose output electrolytic capacitor is then theoretically impermissibly discharged.

The internal LC filter causes the internal rectifier diode on the secondary side to accept this current a few milliseconds later; this means that the external diode connected with its anode to M and cathode to L+ is essential on each power supply. These diodes are, however, only loaded dynamically, so the 8.3 ms surge current loading capability (specified in the data sheets for suitable diodes) can be used as a basis for dimensioning and it is not usually necessary to cool the diodes using heat sinks.

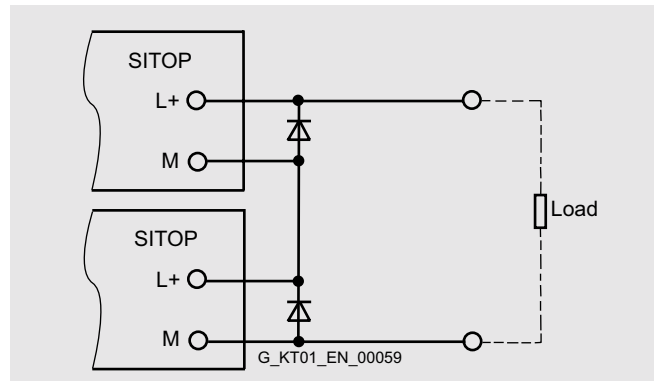

Series connection: Two SITOP power supplies for doubling the voltage

#### Example:

Two single-phase SITOP power supplies with 10 A rated output current (Order No.: 6EP1334-2BA00) should be connected in series to increase the voltage. They supply approximately 38 A dynamically for 200 ms on power-up in the short-circuit case or e.g. also with loads with a high-capacitance input capacitor that momentarily act as a short-circuit at the start.

Suitable diodes for V1 and V2 are, for example, of Type SB 340 <sup>1)</sup> (Schottky diode in axially wired enclosure DO-201AD with approx. 5.3 mm diameter and approx. 9.5 mm length of body).

40 V are permissible as the blocking voltage, and the stationary direct current load capacity  $I_{F AV}$  is 3 A. The important dynamic surge current loading capacity  $I_{F SM}$  important in this case is sufficient for the selected SITOP power supply (more than 100 A for 8.3 ms). For SITOP power supplies with a low rated output current, this diode can also be used, but is over-dimensioned.

- Manufacturer: General Instrument
- Distributor: e.g. RS Components, Spoerle

<sup>1)</sup> We do not accept any liability for this diode recommendation.

### Battery charging with SITOP power supplies

The SITOP modular power supplies 5 A to 40 A with stabilized output voltage that can be set between 24.0 V and 28.8 V supply a constant output current of approximately 1.2 x rated current under overload conditions (e.g. a completely discharged 24 V lead-acid battery). In the case of a V/I characteristic set for parallel operation, the battery will be charged with a constant current until approximately 95% of the set SITOP output voltage has been achieved. The charging current is then continuously reduced from 1.2 x rated current at 95% of the set voltage to approx. 0 A or the self-discharge current of the battery at 100% of the set output voltage, i.e. resistance characteristic in this range.

As reverse voltage protection and polarity reversal protection, we recommend that a diode suitable for at least 1.2 x rated current of the power supply with a blocking voltage of at least 40 V is connected in series with the + output (anode connected to + output of the SITOP modular and cathode connected to positive pole of the battery).

The output voltage of the power supply must be set at no-load to the end-of-charge voltage plus the voltage drop at the diode. For an end-of-charge voltage of e.g. 27.0 V DC (usual at 20 °C to 30 °C battery temperature; in each case, compliance with the specifications of the battery manufacturer must be observed!) and 0.8 V voltage drop at the diode, SITOP modular must be set to 27.8 V during no-load operation.

### Fusing of 24 V power supply circuits and selectivity

With unstabilized rectifiers (power transformer equipped with rectifier) the output usually had to be protected with a suitable fuse so that its rectifier diodes would not fail in the event of an overload or a short-circuit (this would destroy the DC loads due to the resulting alternating voltage and lead to serious damage in most cases).

On the other hand, the stabilized SITOP power supplies comply with the standard applicable to the electrical equipment of machines DIN VDE 0113 Part 1, Section 7.2.9 (November 1998) or EN 60204-1 and are provided with integral electronic short-circuit protection which automatically protects both the power supply and the supplied 24 V DC circuits against an excess current in the event of an overload/short-circuit. A differentiation must be made between the following three cases with respect to fusing on the secondary side:

#### Example 1: No fusing

Fusing the secondary side (24 V DC) for protecting the load circuits and lines is not required if the respective cross-sections are selected for the maximum possible output current RMS value. Depending on the event (short-circuit or overload) this may either be the short-circuit RMS value or the current limitation value.

Example SITOP power 10 (Order No.: 6EP1334-2BA00)

- Rated current 10 A
- Current limitation typ. 13 to 15 A
- Short-circuit RMS value < 21 A

The technical specifications usually specify typical values, maximum values are approx. 2 A above the typical value. In the example here, a maximum possible output current RMS value of approx. 23 A must therefore be used for line dimensioning.

#### Example 2: Reduced cross-sections

If smaller cross-sections are used than specified in DIN VDE 0113 Part 1 or EN 60204-1, the associated 24 V load supply lines must be provided with appropriate line protection (see DIN VDE 0113 Part 1 or EN 60204-1).

It is then unimportant whether the power supply enters current limiting mode (overload) or delivers the maximum short-circuit current (low-resistance short-circuit). The load supply line is in any case protected against an overload by the line protection matched to the conductor cross-section.

### General note for using SITOP power supplies as a battery charging unit

When SITOP modular is used as a battery charging unit, the regulations of VDE 0510 or the relevant national regulations must be observed and adequate ventilation must be provided. The SITOP modular power supplies are designed as rack-mounting units, and protection against electric shock should therefore be provided by installation in an appropriate housing.

The value recommended by the battery manufacturer must be set as the end-of-charge voltage (depending on the battery temperature). An ideal temperature for the lead-acid battery is between +20 and 30 °C and the recommended end-of-charge voltage in this case is usually about 27 V.

### Example 3: Selectivity

In cases where a load which has failed (e.g. because of a short-circuit) has to be rapidly detected or where it is essential to selectively switch it off before the power supply enters current limiting mode (with current limiting mode, the voltage would also fall for all remaining 24 V DC loads), there are two possibilities for the secondary side connection.

- **Use of a 4-channel electronic diagnosis module SITOP select (Order No.: 6EP1961-2BA00), with a current adjustable from 2 A to 10 A for each channel**
- Series connection of appropriate 24 V DC fuses or circuit-breakers

The basis for selection of the 24 V DC fuse or circuit-breaker is the short-circuit current above the rated current which the SITOP power supplies deliver in the event of a short-circuit during operation (values are specified in the respective technical specifications under "Output, dynamic V/I on short-circuit during operation").

It is not easy to calculate the amount of the short-circuit current flowing into the usually not ideal "short-circuit" and the amount flowing into the remaining loads. This depends on the type of overload (high-resistance or low-resistance short-circuit) and the type of load connected (resistive, inductive and capacitive/electronic loads).

However, it can be assumed with a first approximation in the average case encountered in practice that the difference of dyn. V/I minus 50% SITOP rated output current is available for the immediate tripping of a circuit-breaker within a typical time of 12 ms (with 14 times the rated DC with a circuit-breaker characteristic C acc. to IEC 898 or with 7 times the rated DC with a circuit-breaker characteristic B or with 5 times the rated DC with a circuit-breaker characteristic A). Please refer to the following tables for circuit-breakers appropriate for selected fusing according to this assumption.

# Technical information and configuration

## Fusing of the output circuit 24 V DC, selectivity

### List of ordering data and tripping characteristics of single-pole circuit-breakers 5SY4...

acc. to IEC 898/EN 60898 (DIN VDE 0641 Part 11), for use up to 60 V DC (250 V AC, switching capacity 10,000 A)

Rated current	Tripping characteristic	Order No.	Range for immediate tripping < 100 ms for operation with direct current (alternating current)	Required DC for immediate tripping in < 100 ms	Required DC for immediate tripping in approx. 12 ms
1 A	Type A	5SY4 101-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	2 to 5 A DC	5 A DC
1 A	Type C	5SY4 101-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	5 to 14 A DC	14 A DC
1.6 A	Type A	5SY4 115-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	3.2 to 8 A DC	8 A DC
1.6 A	Type C	5SY4 115-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	8 to 22.4 A DC	22.4 A DC
2 A	Type A	5SY4 102-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	4 to 10 A DC	10 A DC
2 A	Type C	5SY4 102-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	10 to 28 A DC	28 A DC
3 A	Type A	5SY4 103-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	6 to 15 A DC	15 A DC
3 A	Type C	5SY4 103-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	15 to 42 A DC	42 A DC
4 A	Type A	5SY4 104-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	8 to 20 A DC	20 A DC
4 A	Type C	5SY4 104-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	20 to 56 A DC	56 A DC
6 A	Type A	5SY4 106-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	12 to 30 A DC	30 A DC
6 A	Type B	5SY4 106-6	DC: 3 to 7 (AC: 3 to 5) × $I_{rated}$	18 to 42 A DC	42 A DC
6 A	Type C	5SY4 106-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	30 to 84 A DC	84 A DC
8 A	Type A	5SY4 108-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	16 to 40 A DC	40 A DC
8 A	Type C	5SY4 108-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	40 to 112 A DC	112 A DC
10 A	Type A	5SY4 110-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	20 to 50 A DC	50 A DC
10 A	Type B	5SY4 110-6	DC: 3 to 7 (AC: 3 to 5) × $I_{rated}$	30 to 70 A DC	70 A DC
10 A	Type C	5SY4 110-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	50 to 140 A DC	140 A DC
13 A	Type A	5SY4 113-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	26 to 65 A DC	65 A DC
13 A	Type B	5SY4 113-6	DC: 3 to 7 (AC: 3 to 5) × $I_{rated}$	39 to 91 A DC	91 A DC
13 A	Type C	5SY4 113-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	65 to 182 A DC	182 A DC
16 A	Type A	5SY4 116-5	DC: 2 to 5 (AC: 2 to 3) × $I_{rated}$	32 to 80 A DC	80 A DC
16 A	Type B	5SY4 116-6	DC: 3 to 7 (AC: 3 to 5) × $I_{rated}$	48 to 112 A DC	112 A DC
16 A	Type C	5SY4 116-7	DC: 5 to 14 (AC: 5 to 10) × $I_{rated}$	80 to 224 A DC	224 A DC

### Ordering data and tripping characteristics of Siemens single-pole circuit-breaker terminals type 8WA1 011-...

#### Suitable for up to 60 V DC (250 V AC)

The following space-saving circuit-breaker terminals for mere short-circuit protection can only be snap-mounted on DIN rail EN 50 022-35x15. They are also available with an auxiliary switch (1 NO contact and 1 NC contact) and feature higher sensitivity than circuit breakers acc. to IEC 898 (EN 60 898), type B.

Tripping times/ranges are within narrower tolerances than those of circuit-breakers. When operated with DC, these circuit-breaker terminals do not trip at currents below the rated current, from 1.1 times the rated current, the circuit-breaker terminal may trip after as little as 100 ms.

The circuit-breaker rated value must therefore be above the load inrush current peak value. In general, however, the first three milliseconds of the load inrush current may be ignored because no less than 20 to 100 times the rated current is required to trip the circuit-breaker terminals during this period of time.

- The circuit-breaker terminals already trip after 40 ms at 1.2 to 1.9 times the rated DC.
- The circuit-breaker terminals already trip after 20 ms at 1.7 to 2.6 times the rated DC.
- The circuit-breaker terminals already trip after 12 ms at 2.2 to 3.8 times the rated DC.

### Ordering data and tripping characteristics of Siemens single-pole circuit-breaker terminals type 8WA1 011-...

Rated current DC	2 A	4 A	6 A	10 A
Order No. (without auxiliary switch)	<b>8WA1 011-1SF25</b>	<b>8WA1 011-1SF26</b>	<b>8WA1 011-1SF27</b>	<b>8WA1 011-1SF28</b>
Order No. (with auxiliary switch 1 NO + 1 NC)	<b>8WA1 011-6SF25</b>	<b>8WA1 011-6SF26</b>	<b>8WA1 011-6SF27</b>	<b>8WA1 011-6SF28</b>
Required DC for immediate tripping in 40 ms	2.4 to 3.8 A	4.8 to 7.6 A	7.2 to 11.4 A	12 to 19 A
Required DC for immediate tripping in 20 ms	3.4 to 5.2 A	6.8 to 10.7 A	10.2 to 15.6 A	17 to 26 A
Required DC for immediate tripping in approx. 12 ms	4.4 to 7.6 A	8.8 to 15.2 A	13.2 to 22.8 A	22 to 38 A

For more data, refer to catalog "Industrial switchgear" (Catalog LV 10)



# Technical information and configuration

## Fusing of the output circuit 24 V DC, selectivity

### Miniature circuit-breakers in 24 V DC circuits which are powered by SITOP power supply units

#### Technical specifications

Type	5 A	10 A
<b>Order No.</b>	<b>6EP1 333-3BA00</b>	<b>6EP1 334-3BA00</b>
<b>Input</b>	Single-phase, two-phase	Single-phase, two-phase
Rated voltage $V_{in \text{ rated}}$	<b>120/230-500 V AC</b>	<b>120/230-500 V AC</b>
<b>Output</b>	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out \text{ rated}}$	<b>24 V DC</b>	<b>24 V DC</b>
Rated current $I_{out \text{ rated}}$	<b>5 A</b>	<b>10 A</b>
Dyn. V/I with short-circuit in operation, typ.	15 A for 25 ms	30 A for 25 ms
<b>Tripping of output m.c.b</b>	The following are approximately available for selective tripping in practice	
SITOP, dyn. V/I - 50% $I_{out \text{ rated}}$ , typ.	12.5 A for 25 ms	25 A for 25 ms
CBs to IEC 898, type 5SY4 1..., selectively trippable in approx. 12 ms	1 A Type A (trips at 5 A DC after typ. 12 ms)	
	-	1 A Type C (trips at 14 A DC after typ. 12 ms)
	1.6 A Type A (trips at 8 A DC after typ. 12 ms)	
	-	1.6 A Type C (trips at 22.4 A DC after typ. 12 ms)
	2 A Type A (trips at 10 A DC after typ. 12 ms)	
	-	3 A Type A (trips at 15 A DC after typ. 12 ms)
Siemens CB terminals, Type 8WA1 011..., selectively trippable in approx. 12 ms	-	4 A Type A (trips at 20 A DC after typ. 12 ms)
	2 A Order No. 8WA1 011-1SF25 (trips at 7.6 A DC after max. 12 ms)	
	-	4 A Order No. 8WA1 011-1SF26 (trips at 15.2 A DC after max. 12 ms)
	-	6 A Order No. 8WA1 011-1SF27 (trips at 22.8 A DC after max. 12 ms)
in 20 ms	4 A Order No. 8WA1 011-1SF26 (trips at 10.7 A DC after max. 20 ms)	-

# Technical information and configuration

## Fusing of the output circuit 24 V DC, selectivity

### Miniature circuit-breakers in 24 V DC circuits which are powered by SITOP power supply units

Technical specifications		
Type	20 A	40 A
Order No.	6EP1 436-2BA00	6EP1 437-2BA10
Input	Three-phase	Single-phase, two-phase
Rated voltage $V_{in rated}$	400-500 V 3 AC	400-500 V AC
Output	Stabilized, floating direct voltage	Stabilized, floating direct voltage
Rated voltage $V_{out rated}$	24 V DC	24 V DC
Rated current $I_{out rated}$	20 A	40 A
Dyn. V/I with short-circuit in operation, typ.	Approx. 30 A constant current	70 A for 600 ms
<b>Tripping of output m.c.b</b>	The following are approximately available for selective tripping in practice	
SITOP, dyn. V/I - 50% $I_{out rated}$ , typ.	20 A (without interruption)	50 A for 600 ms
CBs to IEC 898, type 5SY4 1..., selectively trippable in approx. 12 ms	1 A Type A (trips at 5 A DC after typ. 12 ms)	
	1 A Type C (trips at 14 A DC after typ. 12 ms)	
	1.6 A Type A (trips at 8 A DC after typ. 12 ms)	
	-	1.6 A Type C (trips at 22.4 A DC after typ. 12 ms)
	2 A Type A (trips at 10 A DC after typ. 12 ms)	
	-	2 A Type C (trips at 28 A DC after typ. 12 ms)
	3 A Type A (trips at 15 A DC after typ. 12 ms)	
	-	3 A Type C (trips at 42 A DC after typ. 12 ms)
	4 A Type A (trips at 20 A DC after typ. 12 ms)	
	-	6 A Type A (trips at 30 A DC after typ. 12 ms)
	-	6 A Type B (trips at 42 A DC after typ. 12 ms)
	-	8 A Type A (trips at 40 A DC after typ. 12 ms)
	-	10 A Type A (trips at 50 A DC after typ. 12 ms)
Siemens CB terminals, Type 8WA1 011..., selectively trippable in approx. 12 ms	2 A Order No. 8WA1 011-1SF25 (trips at 7.6 A DC after max. 12 ms)	
	4 A Order No. 8WA1 011-1SF26 (trips at 15.2 A DC after max. 12 ms)	
	-	6 A Order No. 8WA1 011-1SF27 (trips at 22.8 A DC after max. 12 ms)
	-	10 A Order No. 8WA1 011-1SF28 (trips at 38 A DC after max. 12 ms)




# Technical information and configuration

Notes

14



## Dimension drawings

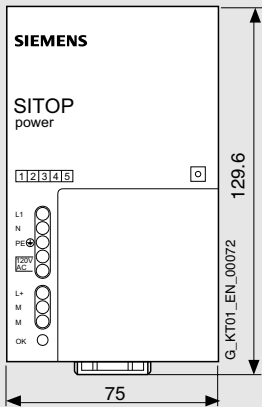

- 15/2 SITOP power  
Single-, two-, three-phase
- 15/9 SITOP power  
Additional components
- 15/11 SITOP power  
Uninterruptible power supplies
- 15/13 SITOP power  
Alternative voltages
- 15/14 SITOP power  
AS interface power supplies
- 15/15 LOGO!Power




# Dimension drawings


## SITOP power Single-, two-, three-phase

### Dimensions in mm


Order No.: **6EP1 331-2BA10, 6EP1 731-2BA00**

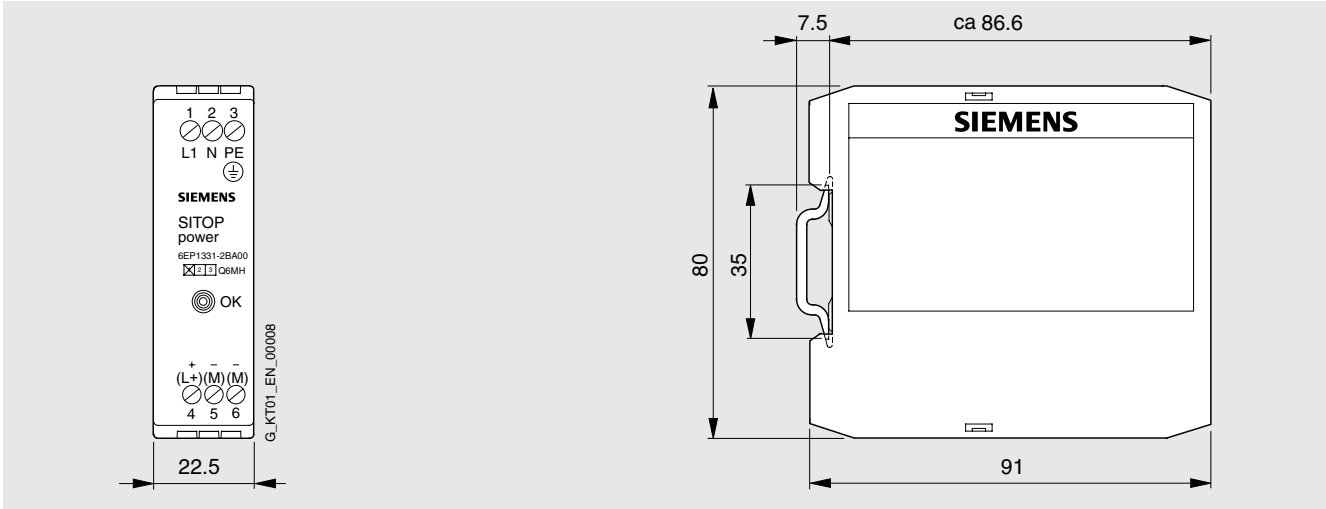

Order No.: **6EP1 331-2BA00**

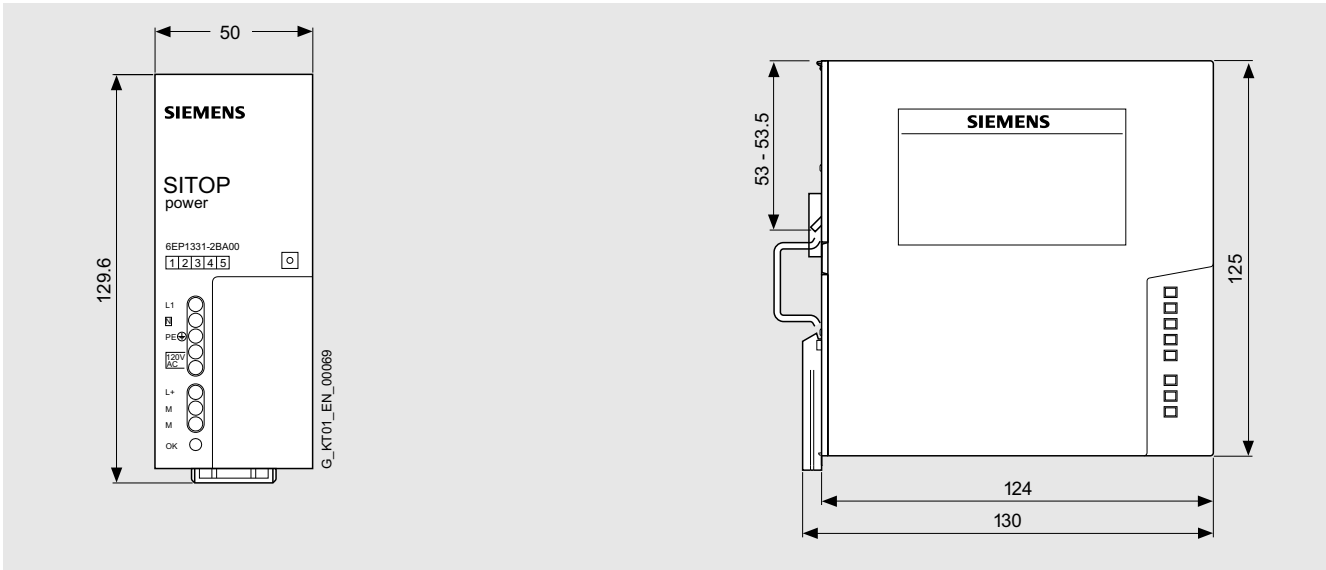

Order No.: **6EP1 331-1SL11, 6ES7 307-1BA00-0AA0**

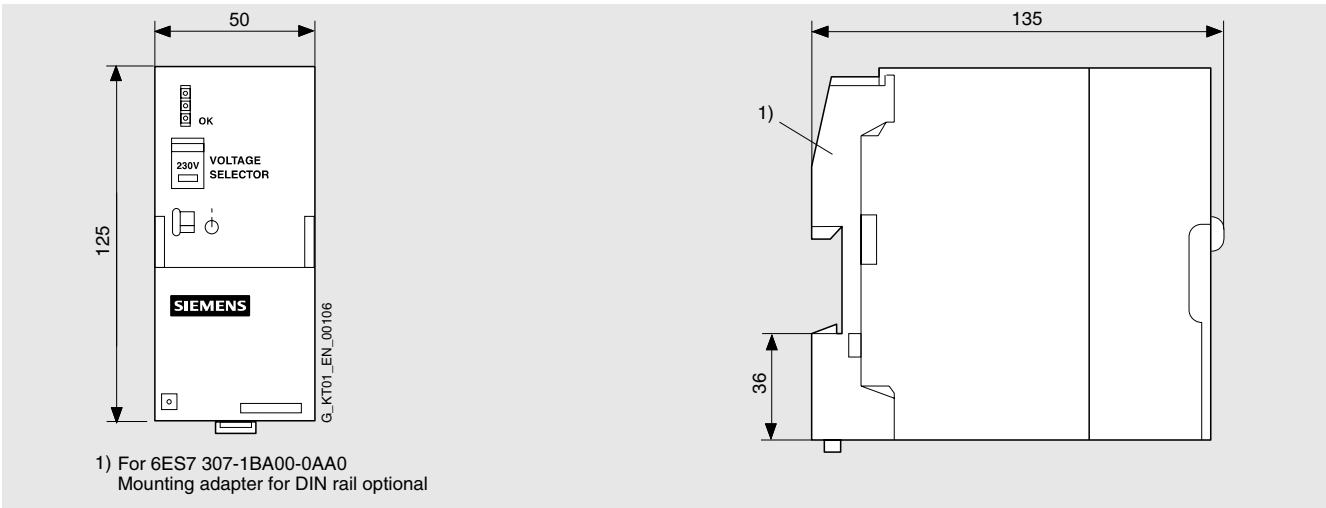


# Dimension drawings


**SITOP power**  
Single-, two-, three-phase

**Dimensions in mm**


Order No.: **6ES7 305-1BA80-0AA0, 6EP1 333-1SL11, 6ES7 307-1EA00-0AA0, 6ES7 307-1EA80-0AA0**

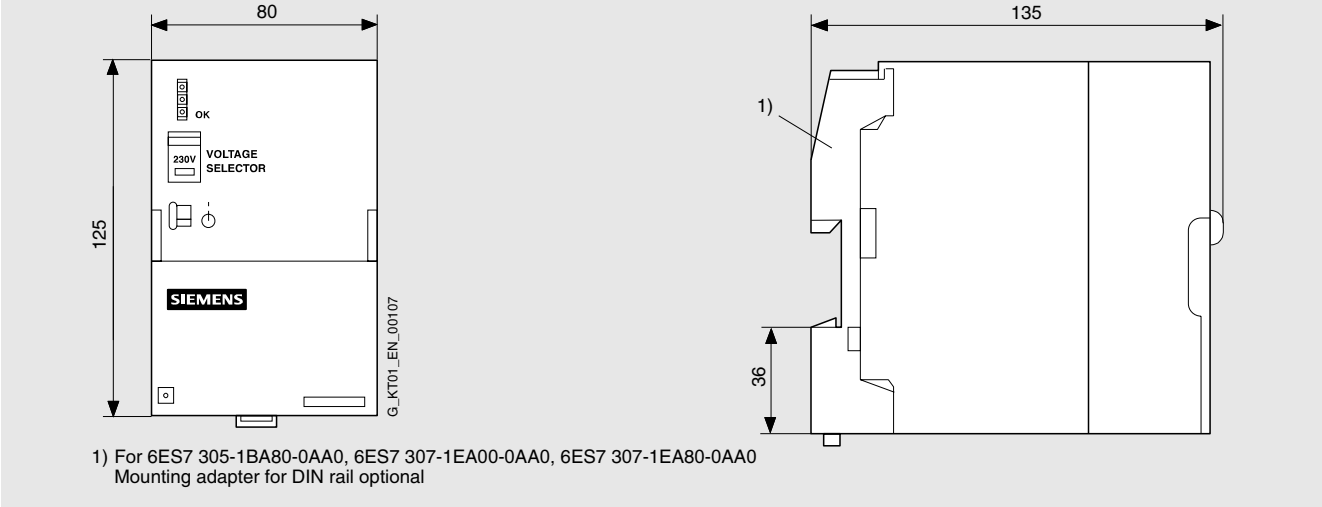

Order No.: **6EP1 732-0AA00, 6EP1 332-1SH12, 6EP1 332-1SH22**

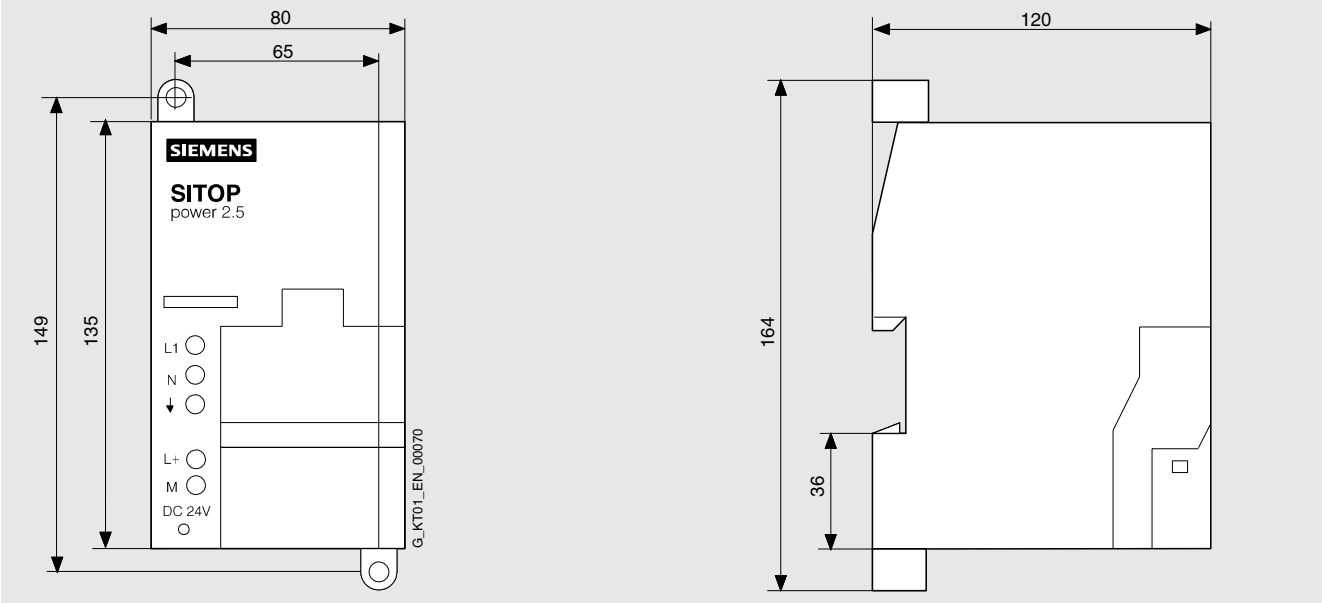

Order No.: **6EP1 332-1SH31**

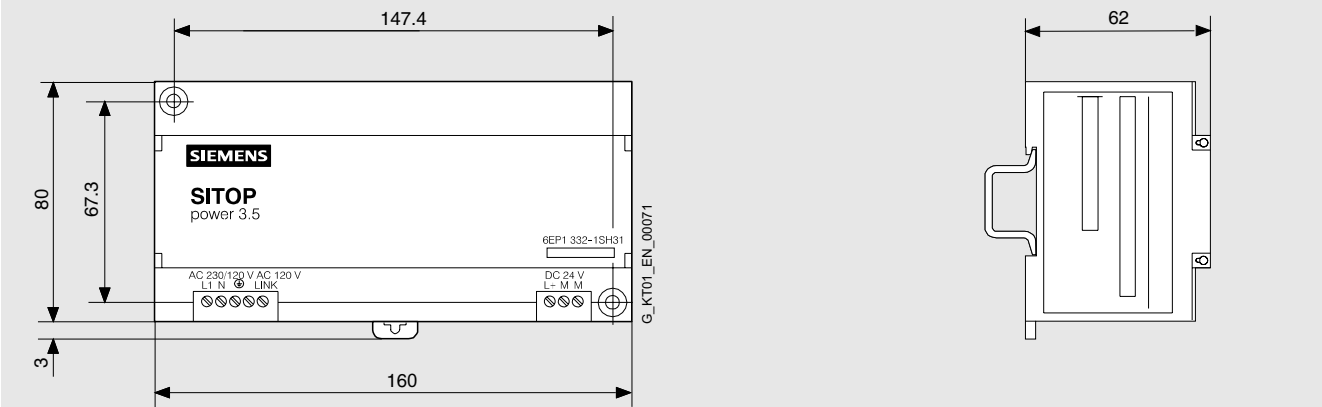


# Dimension drawings


## SITOP power Single-, two-, three-phase

### Dimensions in mm


Order No.: **6EP1 333-3BA00**

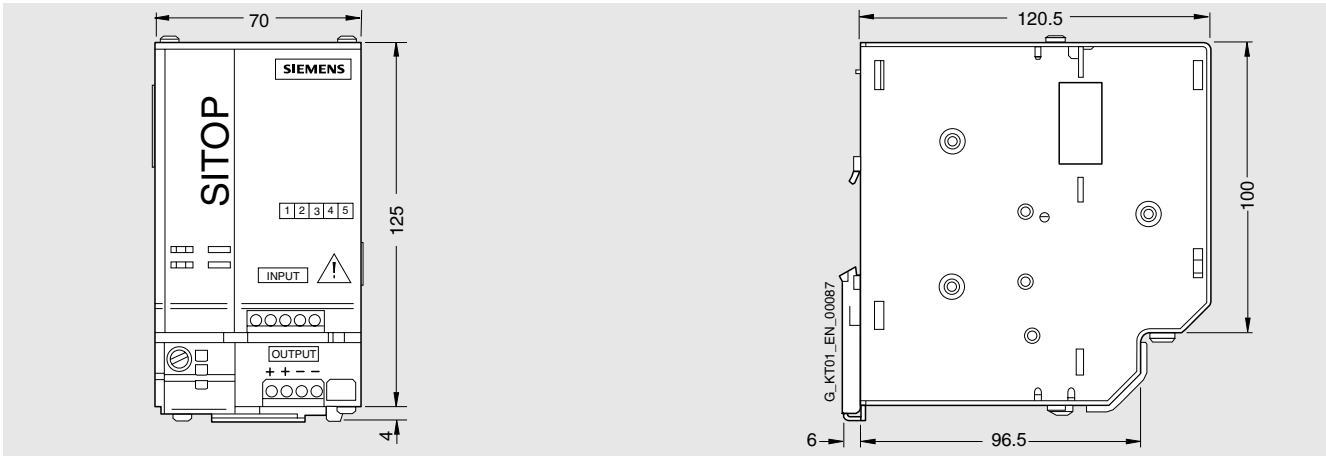

Order No.: **6EP1 333-2BA00, 6EP1 333-2AA00**

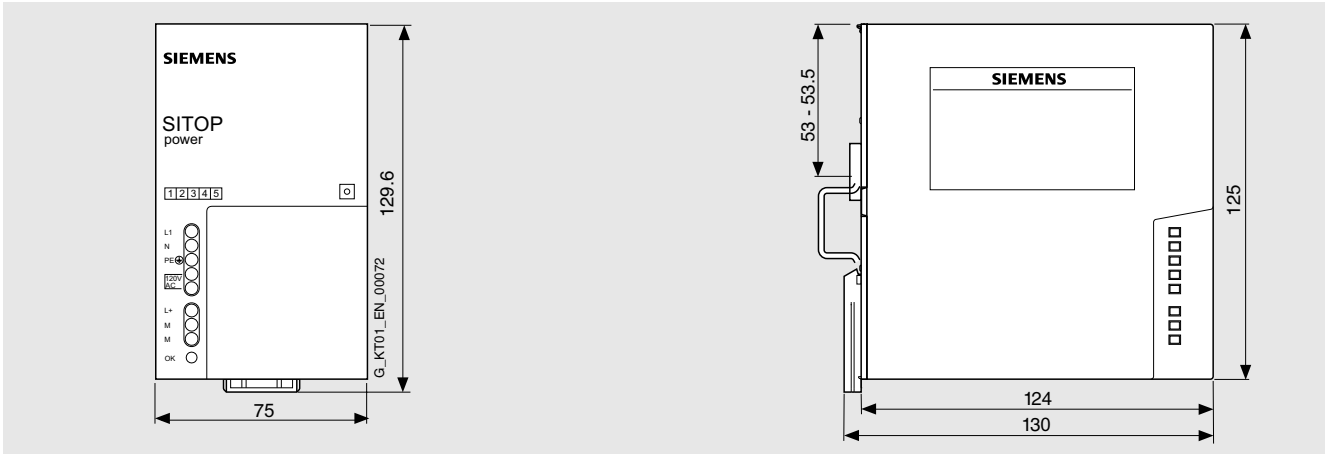

Order No.: **6EP1 333-1AL12, 6EA1 334-1AL12**

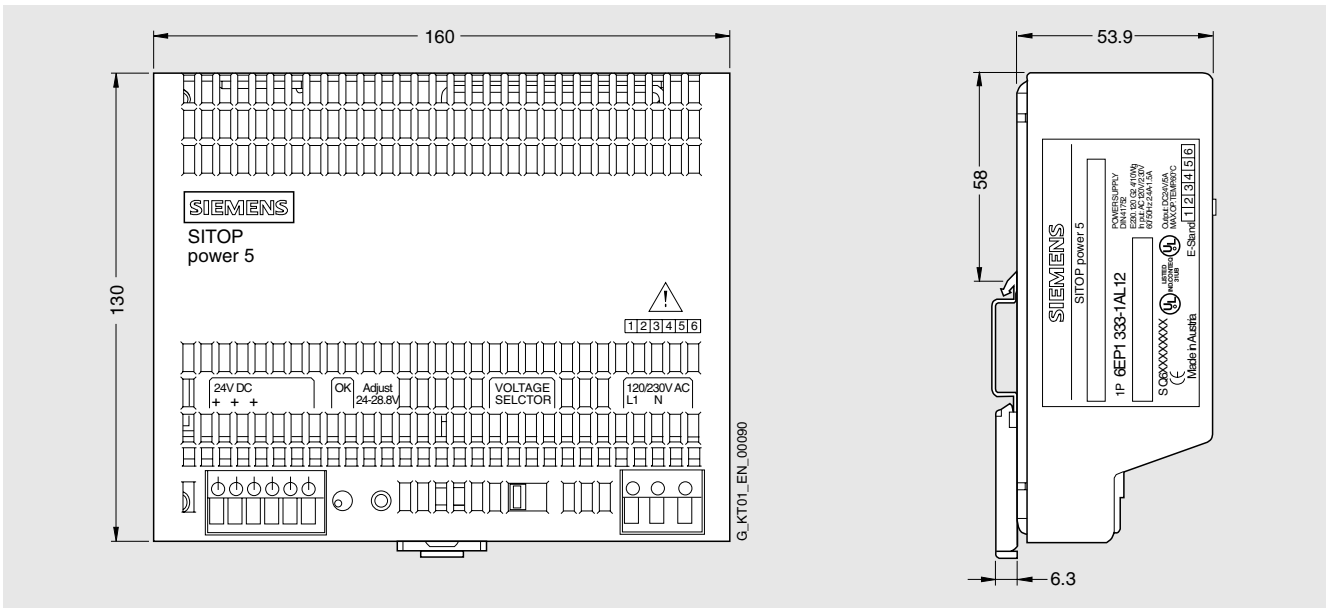


# Dimension drawings


## SITOP power Single-, two-, three-phase

### Dimensions in mm


Order No.: **6EP1 334-3BA00**

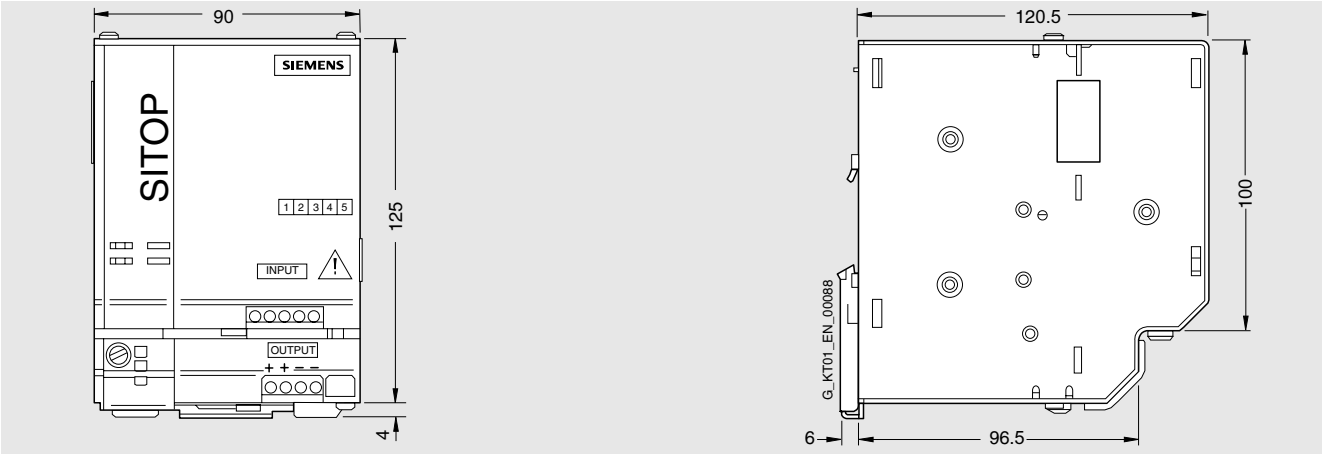

Order No.: **6EP1 334-2BA00, 6EP1 334-2AA00**

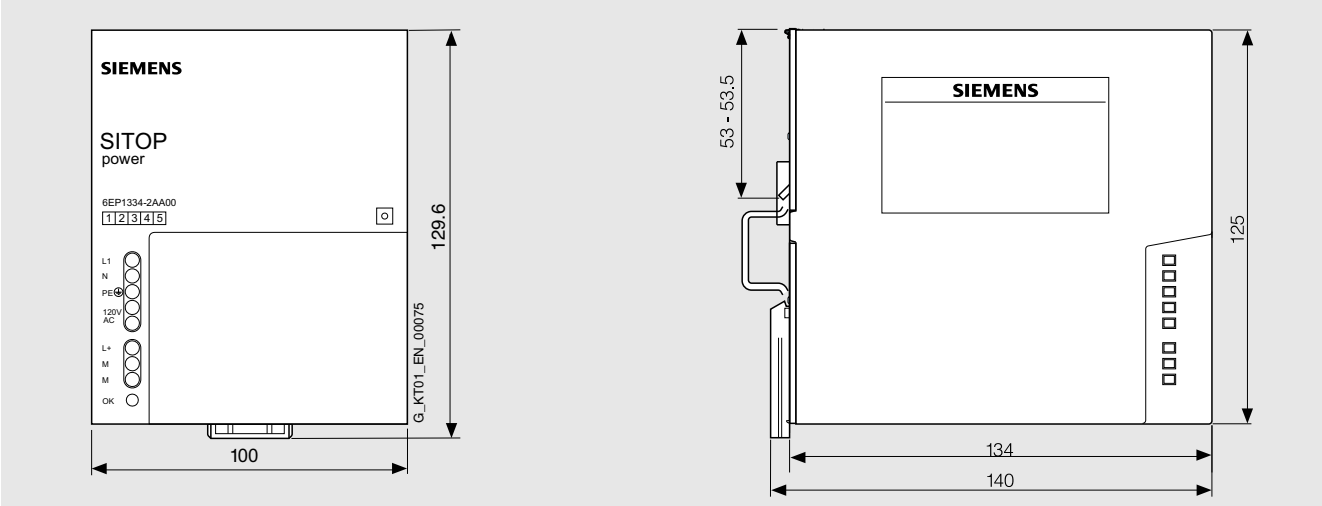

Order No.: **6EP1 334-1SL12, 6ES7 307-1KA01-0AA0, 6EP1 334-1SH01**

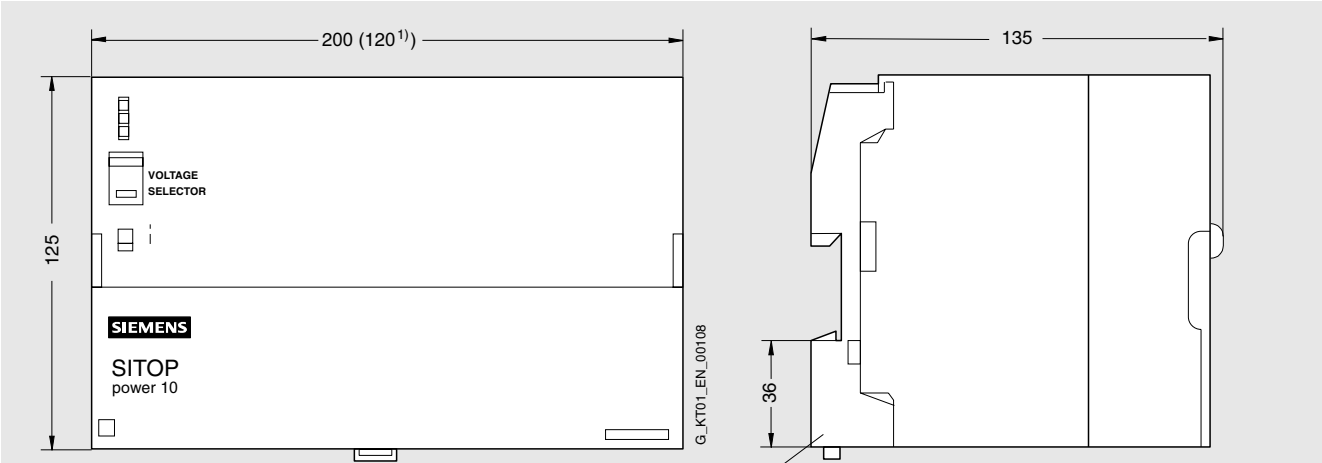


- 1) 6ES7 307-1KA01-0AA0 and 6EP1 334-1SL12
- 2) For 6ES7 307-1KA01-0AA0  
Mounting adapter for DIN rail optional

# Dimension drawings

SITOP power  
Single-, two-, three-phase

## Dimensions in mm

Order No.: 6EP1 334-2CA00

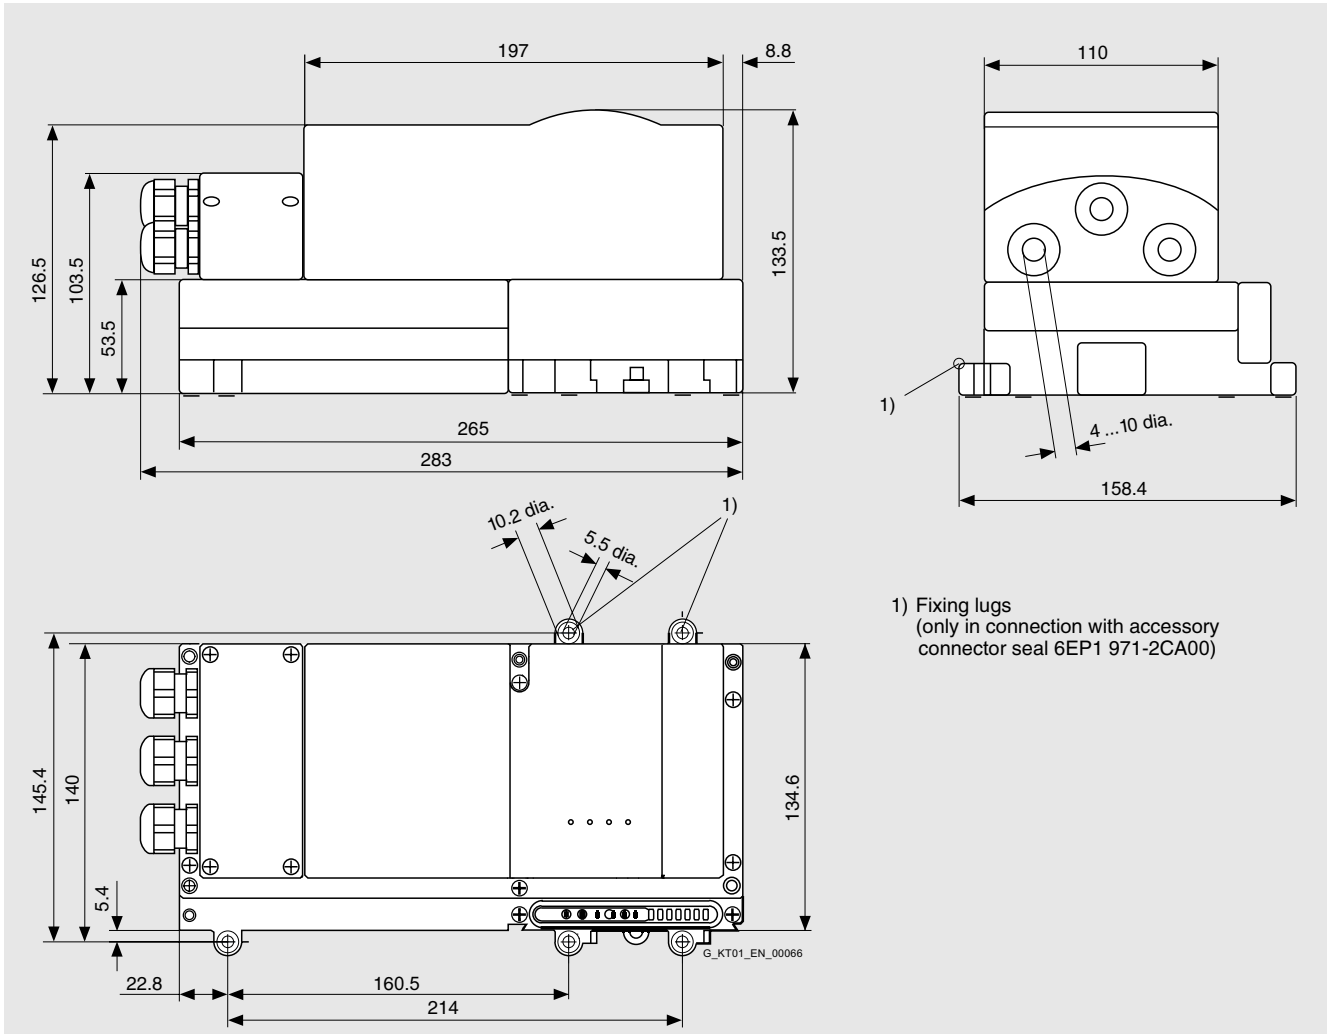


# Dimension drawings


## SITOP power Single-, two-, three-phase

### Dimensions in mm

Order No.: **6EP1 336-3BA00, 6EP1 436-3BA00**

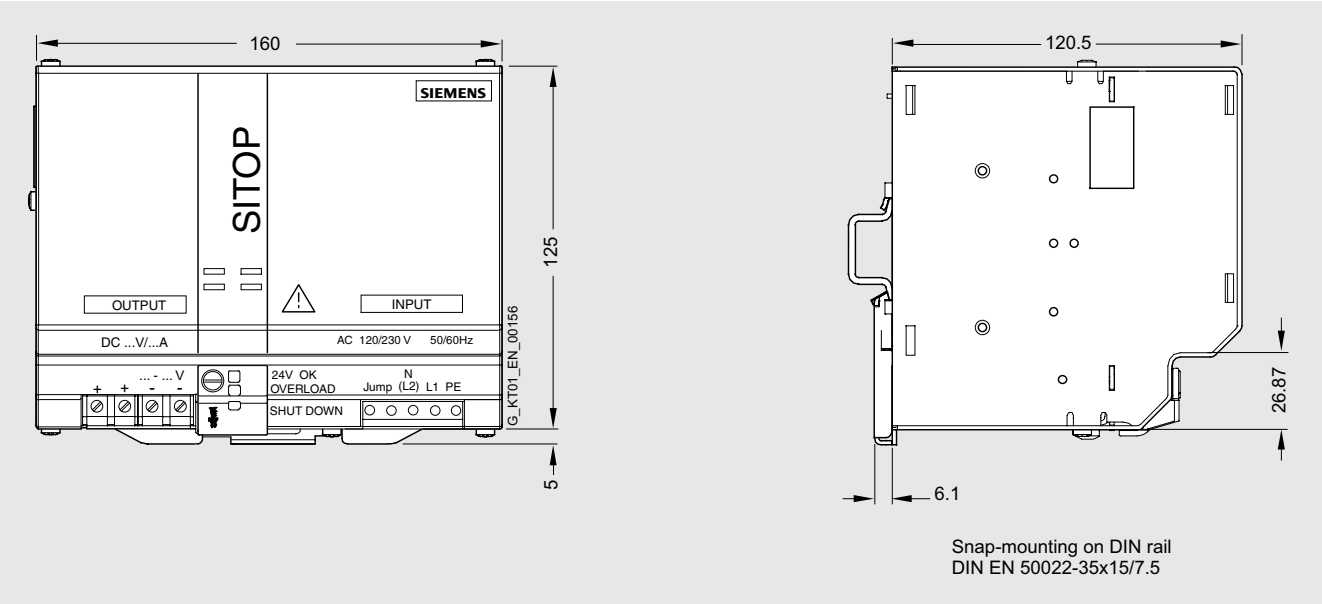

Order No.: **6EP1 337-3BA00, 6EP1 437-3BA00**

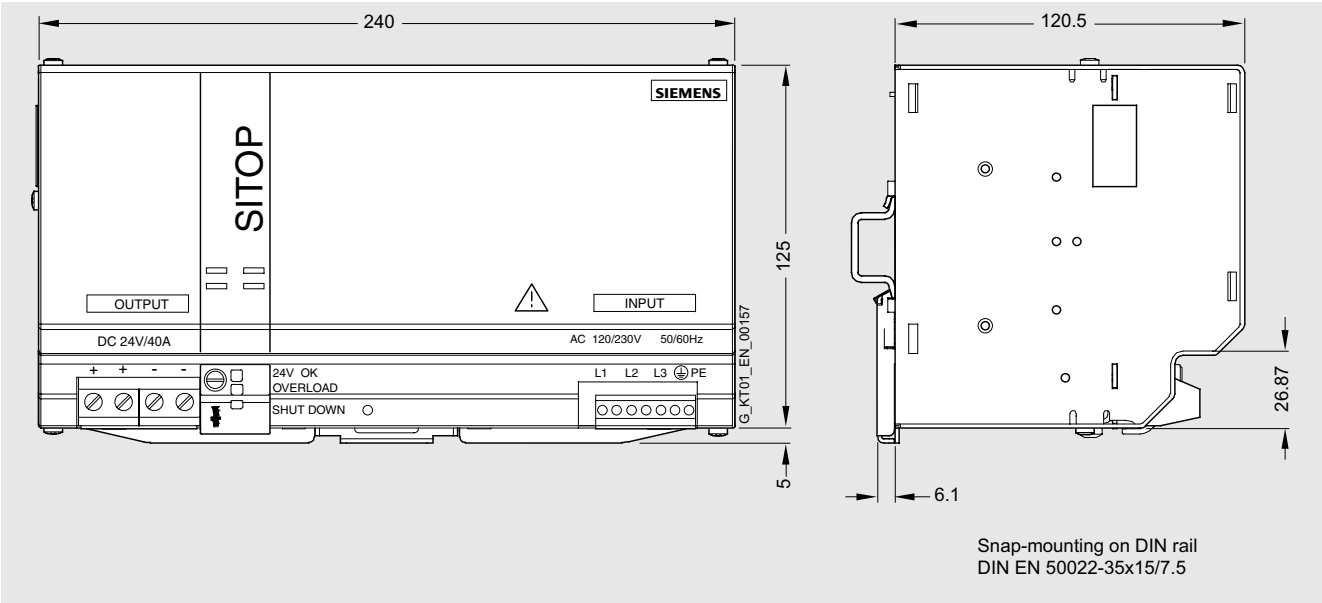


# Dimension drawings


## SITOP power Single-, two-, three-phase

### Dimensions in mm

Order No.: **6EP1 336-2BA00, 6EP1 434-2BA00, 6EP1 436-2BA00**

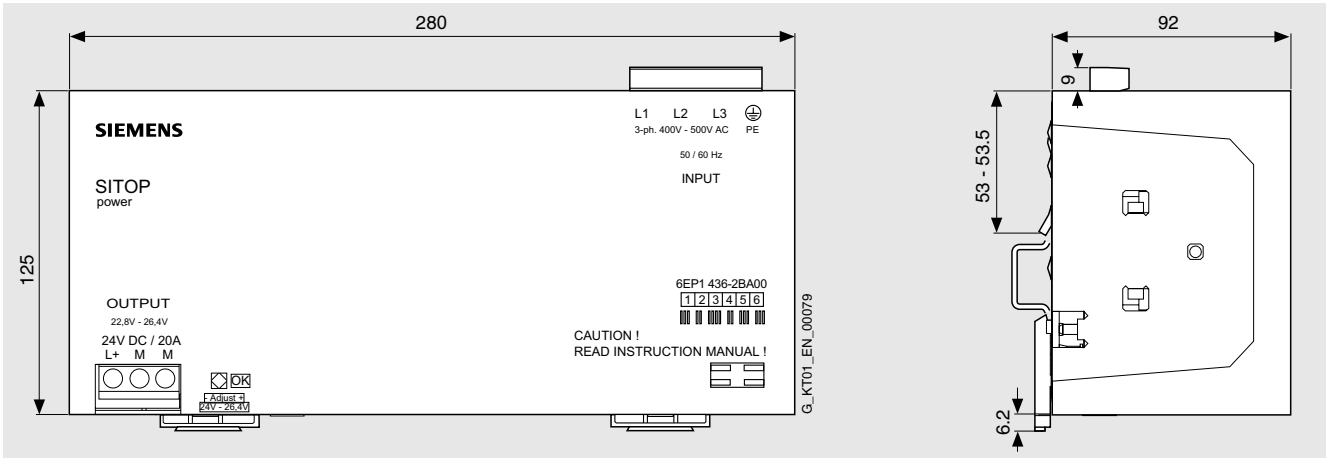


Order No.: **6EP1 536-2AA00, 6EP1 437-2BA00, 6EP1 437-2BA10**

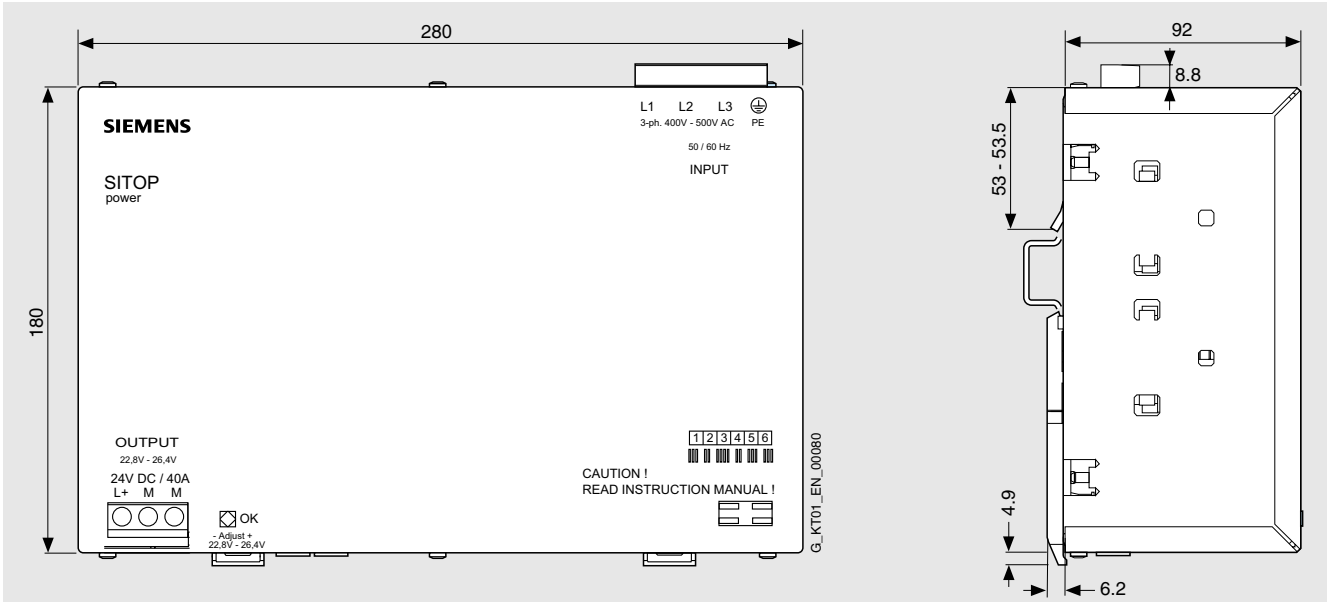


**SITOP power  
Additional components**

**Dimensions in mm**


Order No.: **6EP1 961-3BA10**

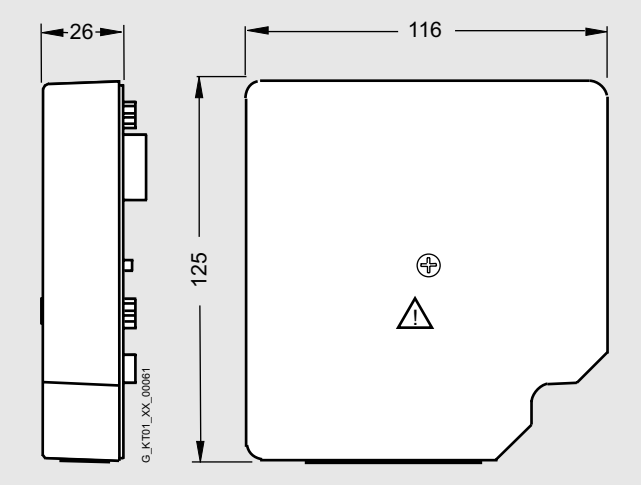


Order No.: **6EP1 961-3BA00**

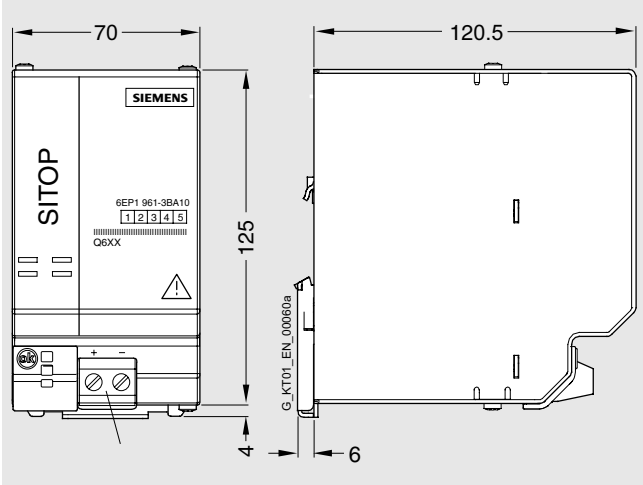

Order No.: **6EP1 961-3BA20**

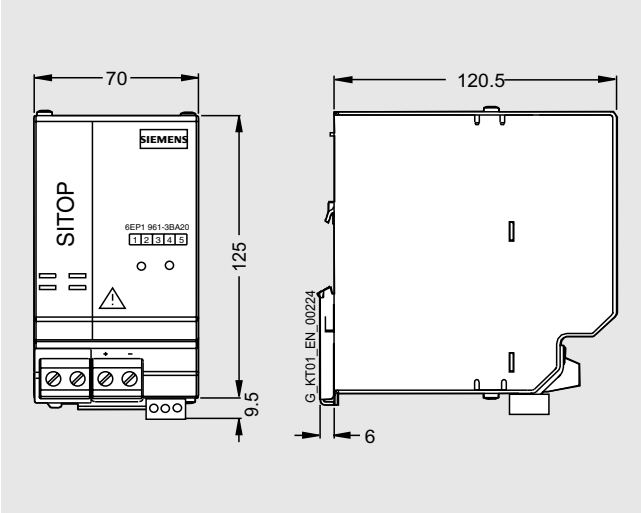

Order No.: **6EP1 961-2BA00**

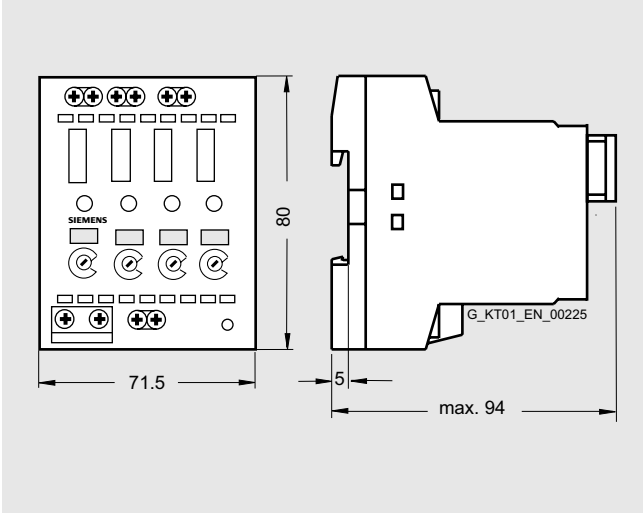


# Dimension drawings


## SITOP power Accessories

### Dimensions in mm

Order No.: **6EP1 971-1AA01**

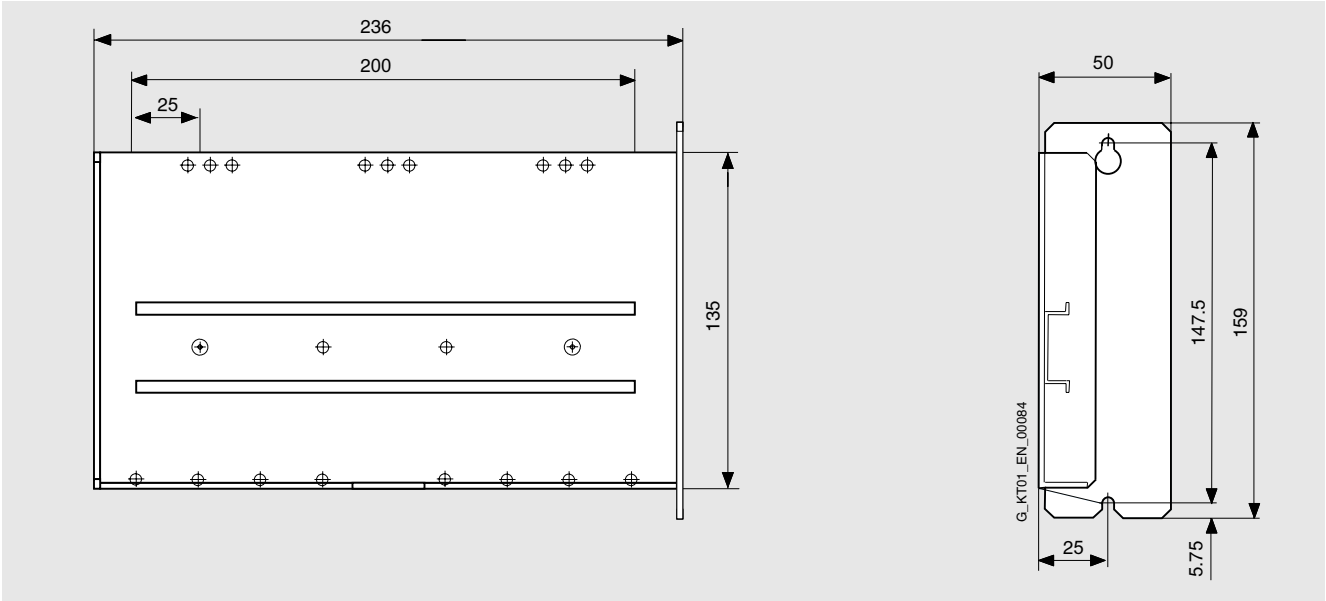


Order No.: **6EP1 971-2BA00**

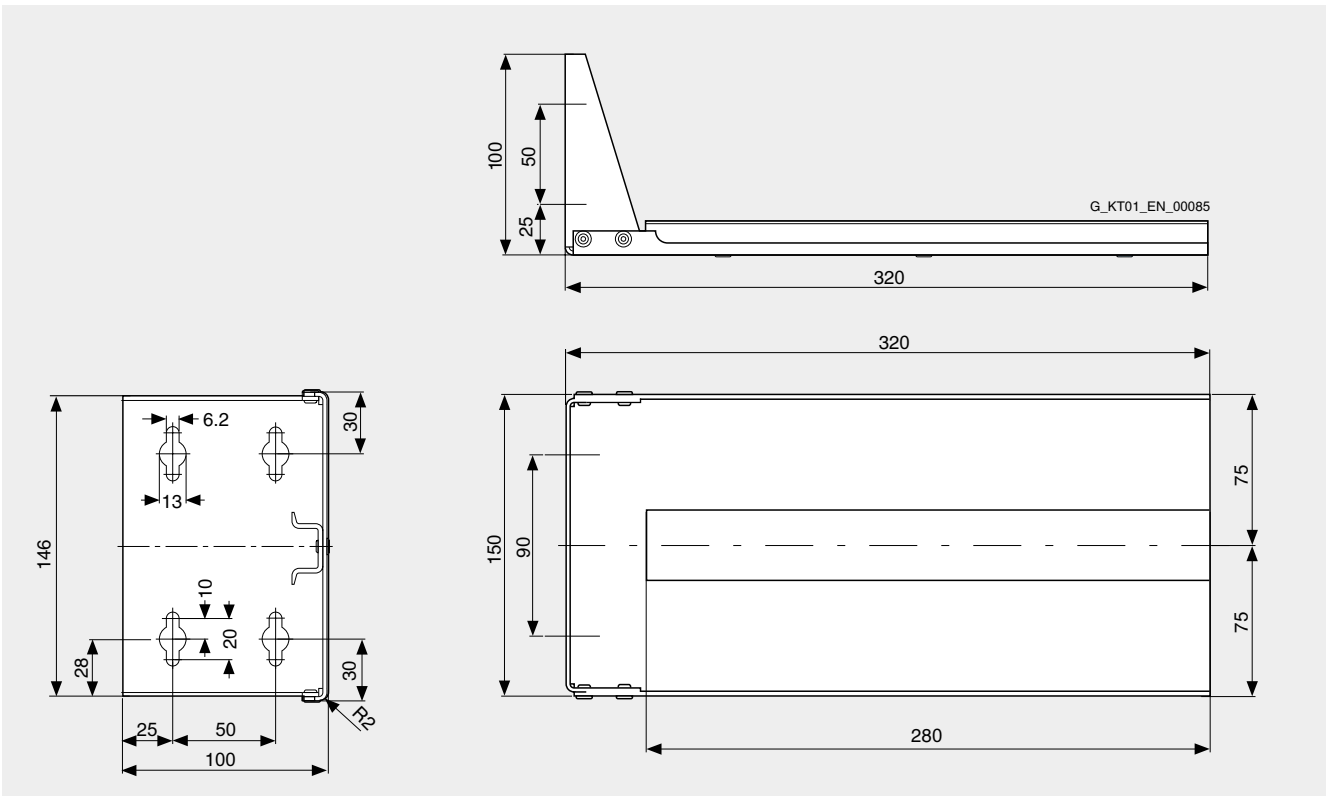


**Dimensions in mm**

Order No.: **6EP1 931-2DC21, 6EP1 931-2DC31, 6EP1 931-2DC41**  
 Order No.: **6EP1 931-2EC21, 6EP1 931-2EC31, 6EP1 931-2EC41**

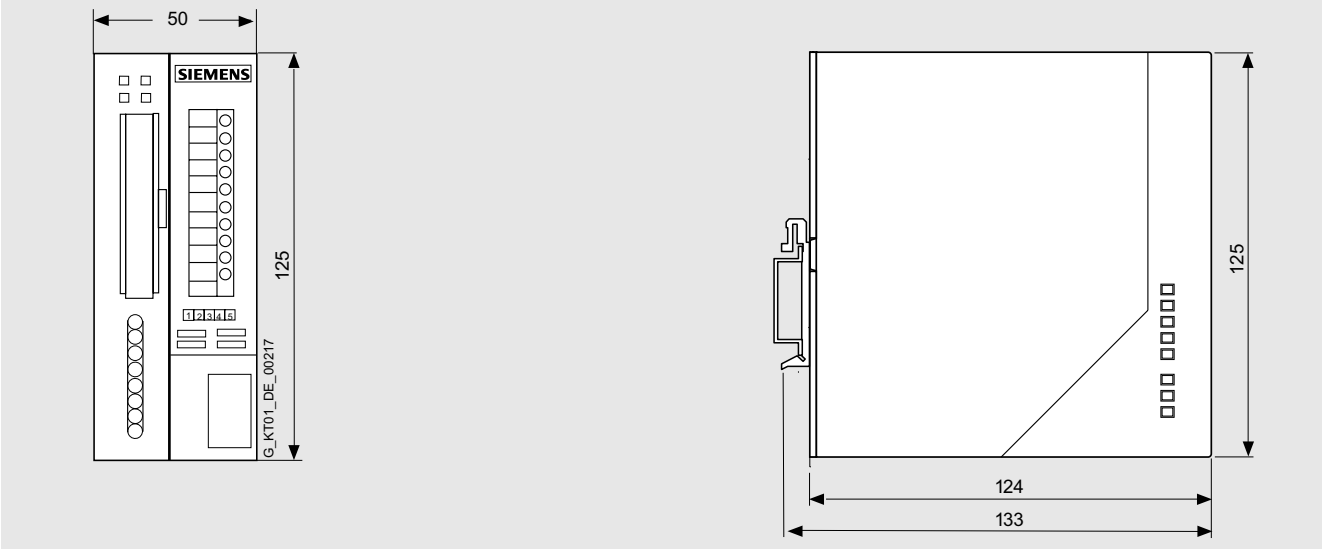

Order No.: **6EP1 931-2FC01**

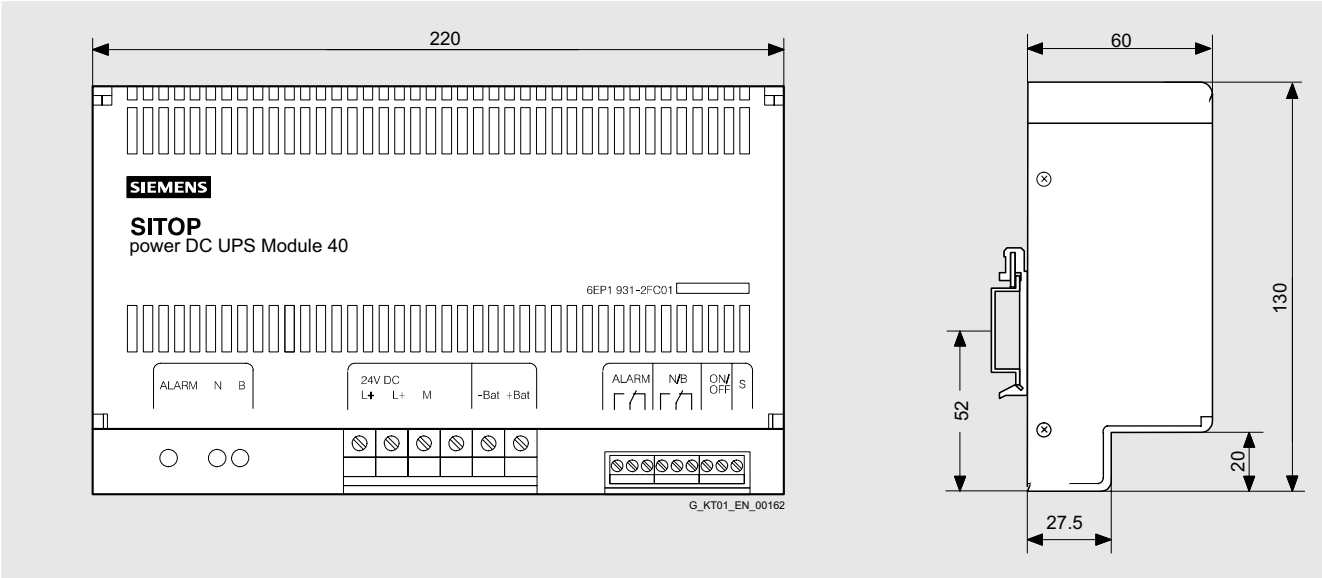


# Dimension drawings


## SITOP power Uninterruptible power supplies

### Drilling templates


Order No.: **6EP1 935-6MD31**

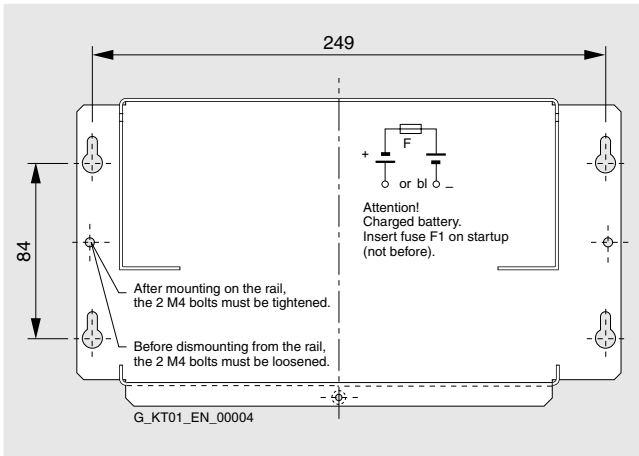


Order No.: **6EP1 935-6MD11**

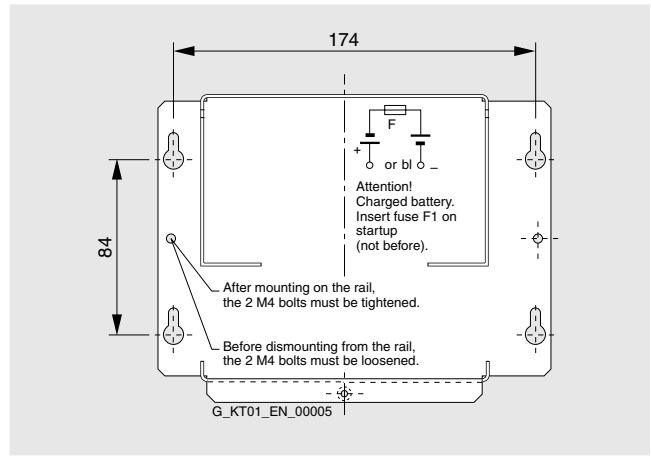

Order No.: **6EP1 935-6ME21**

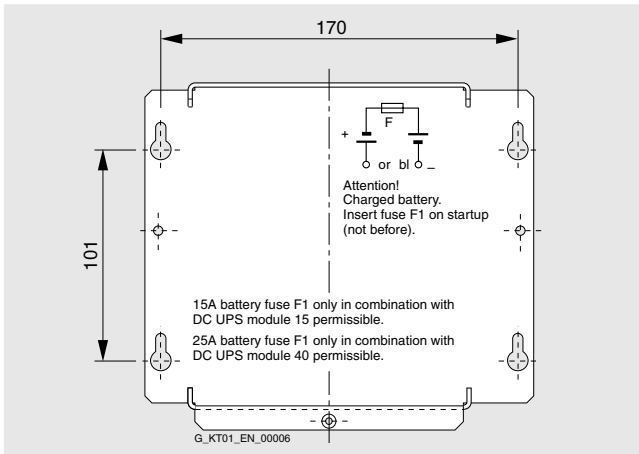

Order No.: **6EP1 935-6MF01**

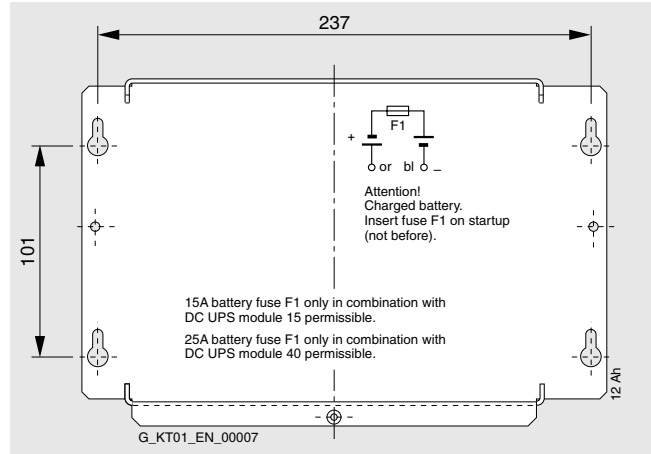


# Dimension drawings


## SITOP power Alternative voltages

### Dimensions in mm

Order No.: **6EP1 353-2BA00, 6EP1 353-0AA00**

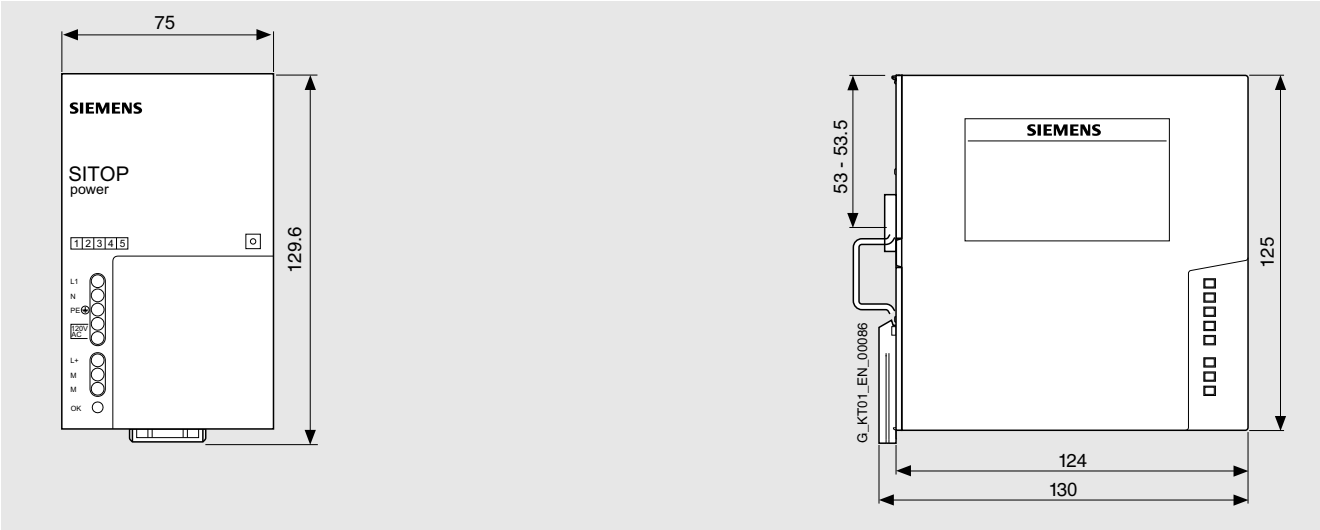

Order No.: **6EP1 457-3BA00**

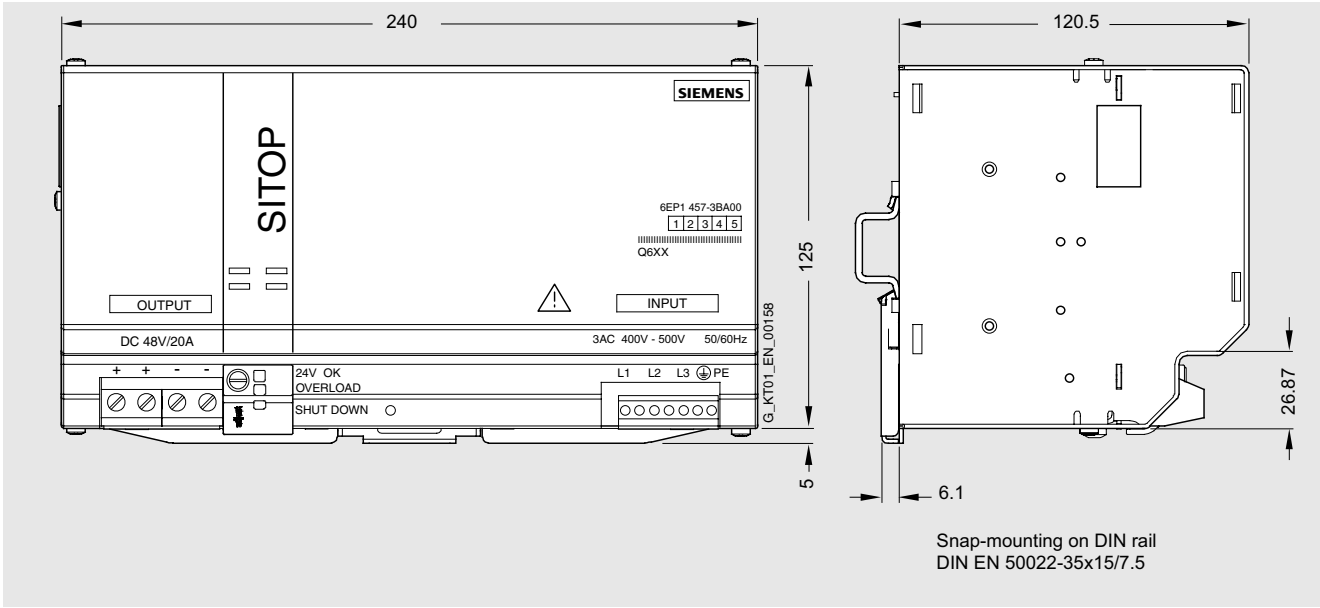


# Dimension drawings


## SITOP power AS interface power supplies

### Dimensions in mm

Order No.: **6EP1 354-1AL01**

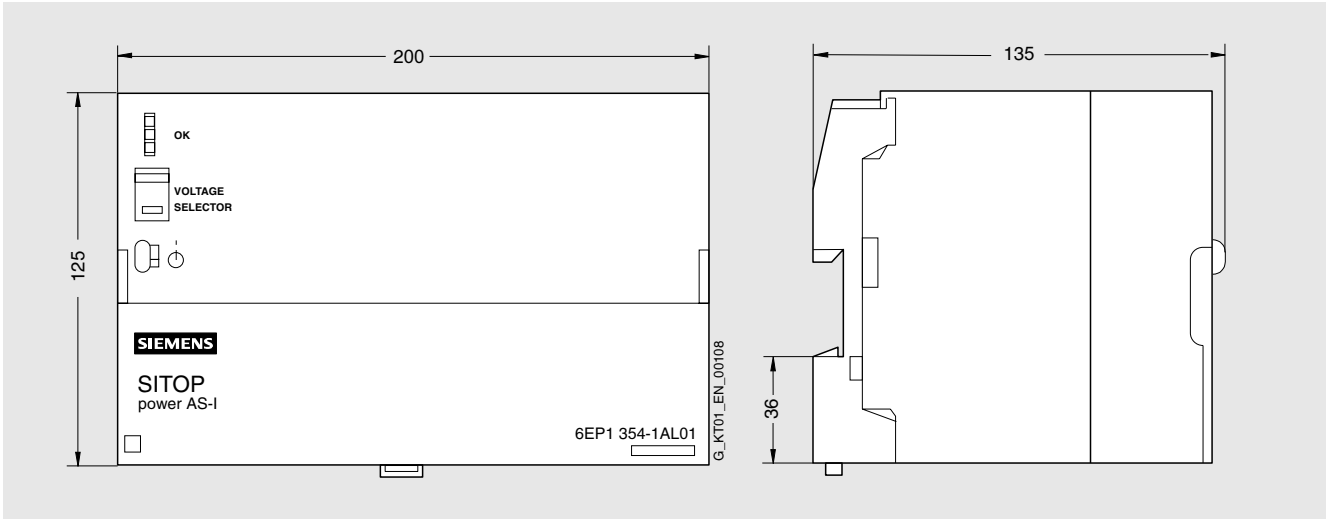


Order No.: **6EP1 632-1AL01**

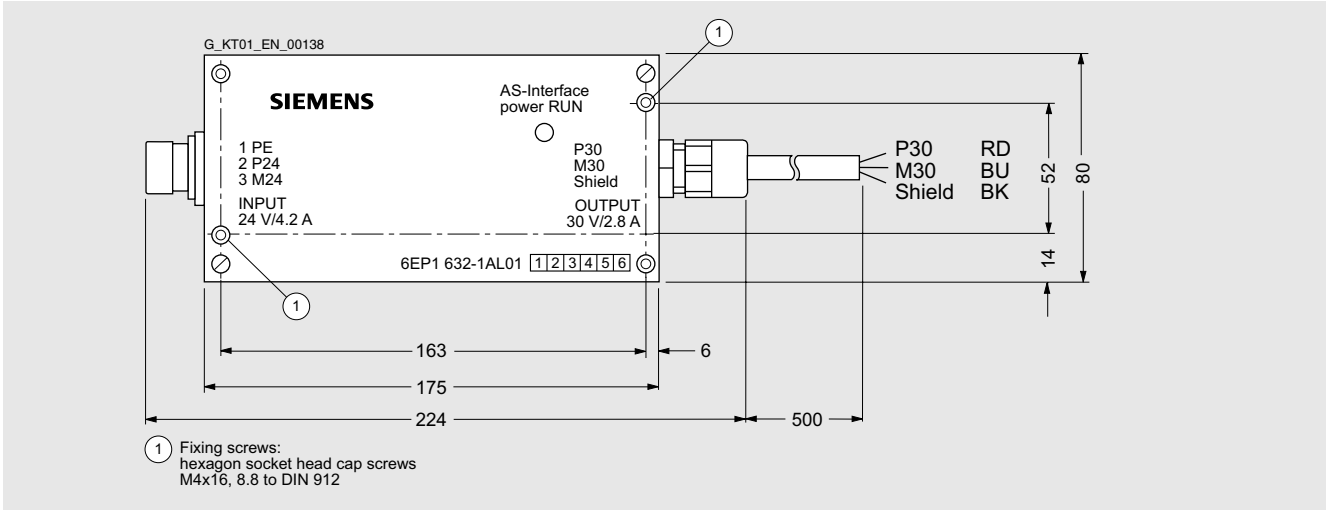


## Dimensions in mm


Order No.: 6EP1 311-1SH02, 6EP1 321-1SH02, 6EP1 351-1SH02, 6EP1 331-1SH02

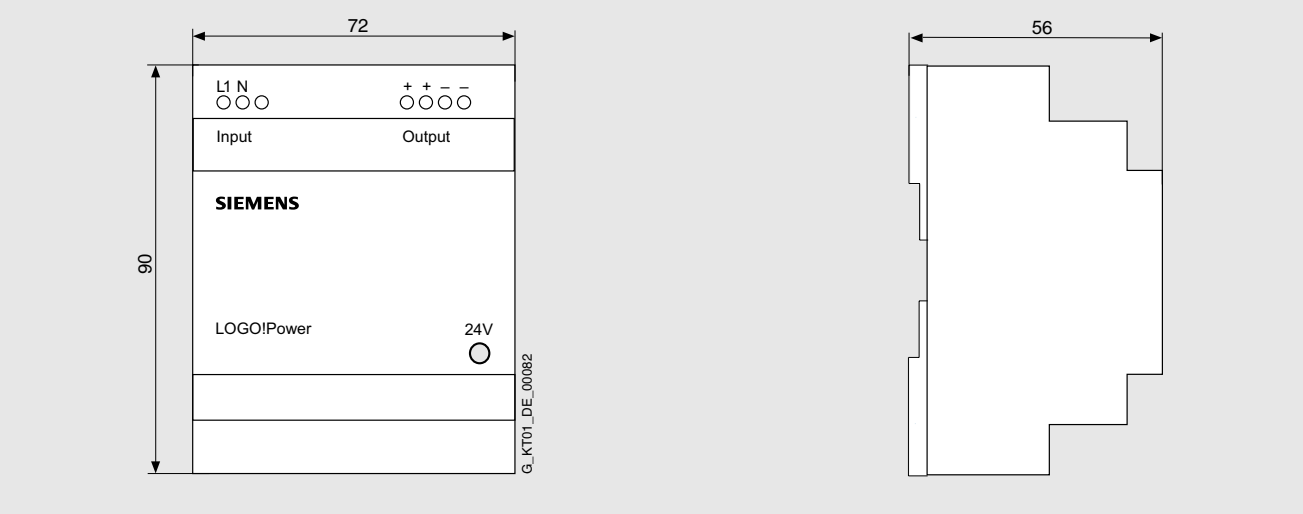

Order No.: 6EP1 311-1SH12, 6EP1 322-1SH02, 6EP1 352-1SH02, 6EP1 332-1SH42

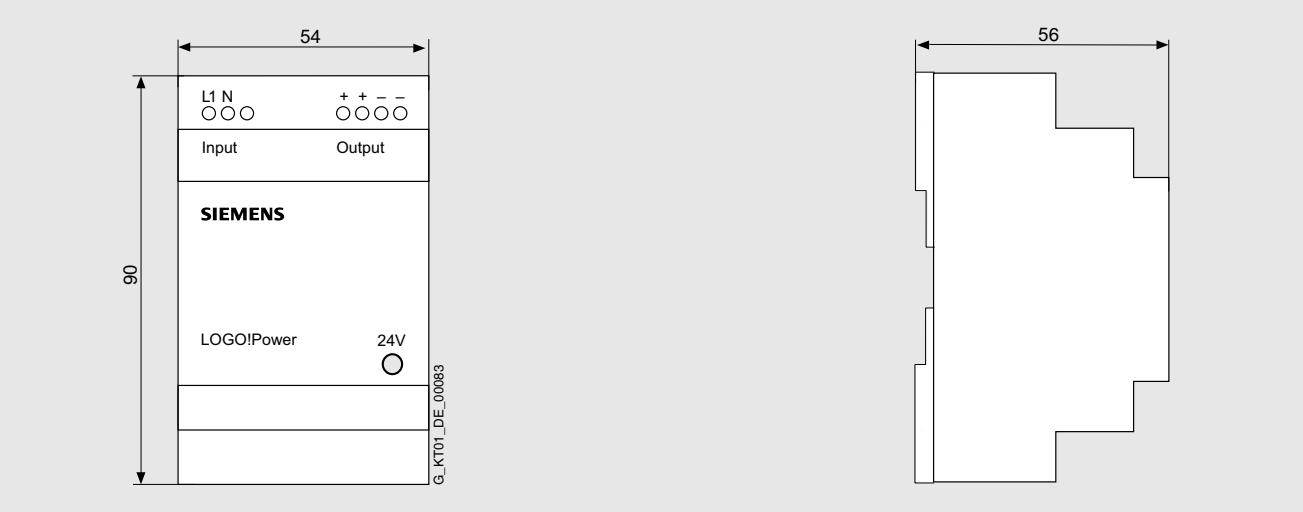

Order No.: 6EP1 332-1SH51

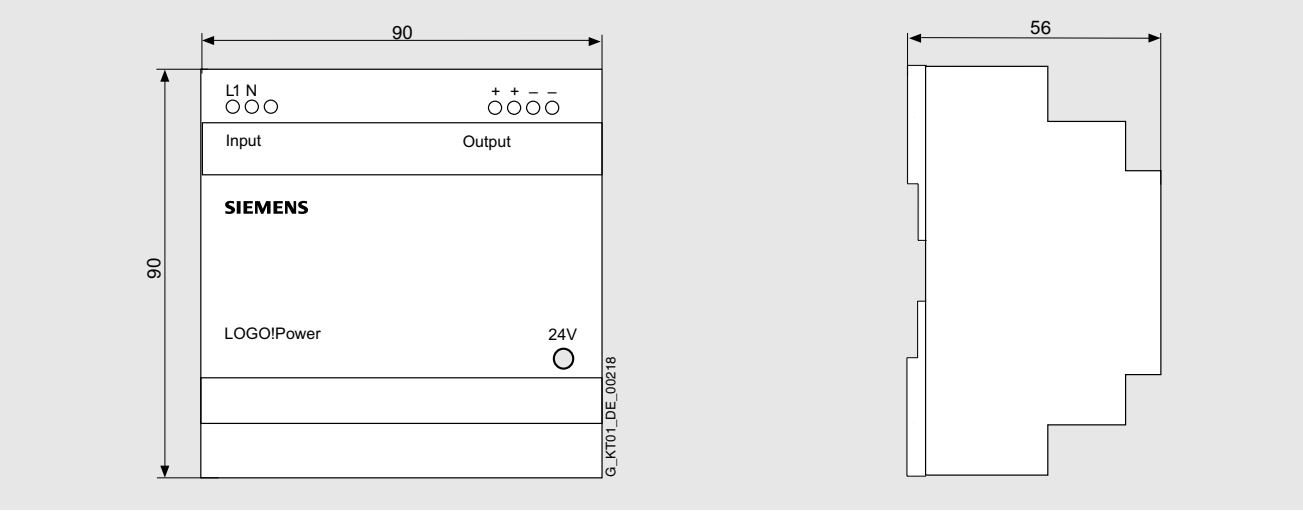

# Dimension drawings

Notes





<b>16/2</b>	<b>SITOP contact persons</b>
<b>16/7</b>	<b>Siemens contacts worldwide</b>
<b>16/8</b>	<b>Service &amp; Support</b> Information and Ordering in the Internet and on CD-ROM
<b>16/9</b>	<b>Indexes</b>
16/9	Order No. index
16/10	Subject index
<b>16/11</b>	<b>Customer Support</b>
<b>16/14</b>	<b>Conditions of sale and delivery</b>



# Appendix

## SITOP contact persons

### in Europe

#### Austria

##### Bregenz

Siemens AG  
Mr. Madlener  
Josef-Huter-Str. 6  
6901 Bregenz  
Tel +43 (0) 51 707 682  
Fax +43 (0) 51 707 522  
Email guenter.madlener@siemens.at

##### Graz

Siemens AG  
Mr. Kröll  
Straßganger Str. 315  
8054 Graz  
Tel +43 (0) 51 707 639 22  
Fax +43 (0) 51 707 586 72  
Email josef.kroell@siemens.at

##### Innsbruck

Siemens AG  
Mr. Hampel  
Siemensstr. 24  
6063 Rum bei Innsbruck  
Tel +43 (0) 51 707 642 98  
Fax +43 (0) 51 707 549 25  
Email johann-georg.hampel@siemens.at

##### Klagenfurt

Siemens AG  
Mr. Weber  
Werner v. Siemens Park 1  
9020 Klagenfurt  
Tel +43 (0) 51 707 642 43  
Fax +43 (0) 51 707 544 18  
Email richard.r.weber@siemens.at

##### Linz

Siemens AG  
Mr. Schmidt  
Wolfgang-Pauli-Str. 2  
4020 Linz  
Tel +43 (0) 51 707 652 95  
Fax +43 (0) 51 707 596 01  
Email erich.e.schmidt@siemens.at

##### Salzburg

Siemens AG  
Mr. Mariacher  
Innsbrucker-Bundesstr. 35  
5020 Salzburg  
Tel +43 (0) 51 707 663 50  
Fax +43 (0) 51 707 532 29  
Email josef.mariacher@siemens.at

##### Vienna

Siemens AG  
Mr. Strasser  
Siemensstr. 88-92  
1210 Wien  
Tel +43 (0) 51 707 237 88  
Fax +43 (0) 51 707 539 40  
Email josef.strasser@siemens.at

##### Belarus

##### Minsk

Siemens  
Mr. Göbecke  
Ul. Y. Kupaly 25, Off. 304  
220030 Minsk  
Tel +375 (17) 210 03 96  
Fax +375 (17) 210 03 95  
Email alexander.goebcke@siemens.com

#### Belgium

##### Huizingen

Mr. De Coninck  
Predslawinka Str. 11-13  
3150 Kiew  
Tel +32 (2) 536 95 39  
Fax +32 (2) 536 23 87  
Email geert.de-coninck@siemens.be

#### Bosnia-Herzegovina

##### Sarajevo

Siemens d.o.o.  
Mr. Ganic  
Dubrovacka 6  
71000 Sarajevo  
Tel +387 (33) 27 66 41  
Fax +387 (33) 27 66 12 79  
Email sadudin.ganic@siemens.ba

#### Bulgaria

##### Sofia

Siemens  
Mrs. Boykova  
Nikola Vapzarov Boulevard  
1407 Sofia  
Tel +359 (2) 965 96 24  
Fax +359 (2) 965 96 62  
Email simatic.service@siemens.bg

#### Croatia

##### Zagreb

Mrs. Ilic  
Heinzelova 70a  
10000 Zagreb  
Tel +385 (1) 6105 337  
Fax +385 (1) 6105 621  
Email ivana.ilic@siemens.com

#### Czech Republic

##### Brno

Siemens s.r.o.  
Mr. Bocek  
Technicka 15  
61600 Brno  
Tel +420 (5) 4119 1731  
Fax +420 (5) 4119 1749  
Email petr.bocek@siemens.com

##### Prague

Mr. Pömmel  
Evropská 33a  
Praha 6  
Tel +420 (2) 3303 2410  
Fax +420 (2) 3303 2492  
Email werner.poemmerl@siemens.com

#### Denmark

##### Kopenhagen

Mr. Limkilde  
Borupvang 3  
2750 Ballerup  
Tel +45 4477 4883  
Fax +45 4477 4002  
Email llk@siemens.dk

#### Estonia

##### Tallinn

AS Siemens Automation and Drives  
Mr. Ristoja  
Pärnu mnt. 139 c  
11317 Tallinn  
Tel +372 630 47 51  
Fax +372 630 47 31  
Email joel.ristoja@siemens.com

#### Finland

##### Helsinki

Siemens Oy Automation and Drives  
Mr. Leppala  
Majurinkatu 6  
02600 Espoo  
Tel +358 10 511 3463  
Fax +358 10 511 3656  
Email ari.leppala@siemens.com

#### France

##### Paris

Mr. Rouault  
39-47, Boulevard Ornano  
93527 Saint-Denis CEDEX 2  
Tel +33 (1) 4922 9309  
Fax +33 (1) 4922 3951  
Email jean-marie.rouault@siemens.fr

#### Germany

##### Aachen

Siemens AG  
Mr. Schauenberg  
Franz-Geuer-Str. 10  
50823 Köln  
Tel +49 (221) 576 2536  
Fax +49 (221) 576 2921  
Email frank.schauenberg@siemens.com

##### Augsburg

Siemens AG  
Mr. Greis  
Richard-Strauss-Str. 76  
81679 München  
Tel +49 (89) 9221 3877  
Fax +49 (89) 9221 1738  
Email wolfgang.greis@siemens.com

##### Bayreuth

Siemens AG  
Mr. Fiedler  
Von-der-Tann-Str. 30  
90439 Nürnberg  
Tel +49 (911) 654 3413  
Fax +49 (911) 654 3596  
Email wolfram.fiedler@siemens.com

##### Berlin

Siemens AG  
Mr. Förster  
Nonnendammallee 72  
13629 Berlin  
Tel +49 (30) 386 32 303  
Fax +49 (30) 386 32 543  
Email martin.foerster@siemens.com

##### Bielefeld

Siemens AG  
Mr. Knauth  
Frankfurter Str. 3d  
38112 Braunschweig  
Tel +49 (531) 2712 314  
Fax +49 (531) 2712 416  
Email bernd.knauth@siemens.com

##### Braunschweig

Siemens AG  
Mr. Knauth  
Frankfurter Str. 3d  
38112 Braunschweig  
Tel +49 (531) 2712 314  
Fax +49 (531) 2712 416  
Email bernd.knauth@siemens.com

#### Bremen

Siemens AG  
Mr. Kröger  
Universitätsallee 16  
28359 Bremen  
Tel +49 (421) 364 2185  
Fax +49 (421) 364 2249  
Email helmut.kroeger@siemens.com

#### Chemnitz

Siemens AG  
Mr. Förster  
Nonnendammallee 72  
13629 Berlin  
Tel +49 (30) 386 32 303  
Fax +49 (30) 386 32 543  
Email martin.foerster@siemens.com

#### Dresden

Siemens AG  
Mr. Förster  
Nonnendammallee 72  
13629 Berlin  
Tel +49 (30) 386 32 303  
Fax +49 (30) 386 32 543  
Email martin.foerster@siemens.com

#### Düsseldorf

Siemens AG  
Mr. Schauenberg  
Franz-Geuer-Str. 10  
50823 Köln  
Tel +49 (221) 576 2536  
Fax +49 (221) 576 2921  
Email frank.schauenberg@siemens.com

#### Erfurt

Siemens AG  
Mr. Förster  
Nonnendammallee 72  
13629 Berlin  
Tel +49 (30) 386 32 303  
Fax +49 (30) 386 32 543  
Email martin.foerster@siemens.com

#### Essen

Siemens AG  
Mr. Poschmann  
Kruppstr. 16  
45128 Essen  
Tel +49 (201) 816 2148  
Fax +49 (201) 816 3621  
Email rolf.poschmann@siemens.com

#### Frankfurt

Siemens AG  
Mr. Wulle  
Dynamostr. 4  
68165 Mannheim  
Tel +49 (621) 465 2661  
Fax +49 (621) 465 2747  
Email thomas.wulle@siemens.com

#### Freiburg

Siemens AG  
Mr. Röder  
Weissacher Str. 11  
70499 Stuttgart  
Tel +49 (711) 137 4059  
Fax +49 (711) 137 2070  
Email bernd.roeder@siemens.com

### in Europe (continued)

#### Hamburg

Siemens AG  
Mr. Kröger  
Universitätsallee 16  
28359 Bremen  
Tel +49 (421) 364 2185  
Fax +49 (421) 364 2249  
Email helmut.kroeger  
@siemens.com

#### Hannover

Siemens AG  
Mr. Knauth  
Frankfurter Str. 3d  
38112 Braunschweig  
Tel +49 (531) 2712 314  
Fax +49 (531) 2712 416  
Email bernd.knauth  
@siemens.com

#### Heilbronn

Siemens AG  
Mr. Röder  
Weissacher Str. 11  
70499 Stuttgart  
Tel +49 (711) 137-4059  
Fax +49 (711) 137-2070  
Email bernd.roeder  
@siemens.com

#### Karlsruhe

Siemens AG  
Mr. Wulle  
Dynamostr. 4  
68165 Mannheim  
Tel +49 (621) 465 2661  
Fax +49 (621) 465 2747  
Email thomas.wulle  
@siemens.com

#### Kassel

Siemens AG  
Mr. Knauth  
Frankfurter Str. 3d  
38112 Braunschweig  
Tel +49 (531) 2712 314  
Fax +49 (531) 2712 416  
Email bernd.knauth  
@siemens.com

#### Kempten

Siemens AG  
Mr. Greis  
Richard-Strauss-Str. 76  
81679 München  
Tel +49 (89) 9221 3877  
Fax +49 (89) 9221 1738  
Email wolfgang.greis  
@siemens.com

#### Kiel

Siemens AG  
Mr. Kröger  
Universitätsallee 16  
28359 Bremen  
Tel +49 (421) 364 2185  
Fax +49 (421) 364 2249  
Email helmut.kroeger  
@siemens.com

#### Koblenz

Siemens AG  
Mr. Schauenberg  
Franz-Geuer-Str. 10  
50823 Köln  
Tel +49 (221) 576 2536  
Fax +49 (221) 576 2921  
Email frank.schauenberg  
@siemens.com

#### Cologne

Siemens AG  
Mr. Schauenberg  
Franz-Geuer-Str. 10  
50823 Köln  
Tel +49 (221) 576 2536  
Fax +49 (221) 576 2921  
Email frank.schauenberg  
@siemens.com

#### Konstanz

Siemens AG  
Mr. Röder  
Weissacher Str. 11  
70499 Stuttgart  
Tel +49 (711) 137 4059  
Fax +49 (711) 137 2070  
Email bernd.roeder  
@siemens.com

#### Leipzig

Siemens AG  
Mr. Förster  
Nonnendammallee 72  
13629 Berlin  
Tel +49 (30) 386 32 303  
Fax +49 (30) 386 32 543  
Email martin.foerster  
@siemens.com

#### Magdeburg

Siemens AG  
Mr. Knauth  
Frankfurter Str. 3d  
38112 Braunschweig  
Tel +49 (531) 2712 314  
Fax +49 (531) 2712 416  
Email bernd.knauth  
@siemens.com

#### Mannheim

Siemens AG  
Mr. Wulle  
Dynamostr. 4  
68165 Mannheim  
Tel +49 (621) 465 2661  
Fax +49 (621) 465 2747  
Email thomas.wulle  
@siemens.com

#### Munich

Siemens AG  
Mr. Greis  
Richard-Strauss-Str. 76  
81679 München  
Tel +49 (89) 9221 3877  
Fax +49 (89) 9221 1738  
Email wolfgang.greis  
@siemens.com

#### Münster

Siemens AG  
Mr. Poschmann  
Kruppstr. 16  
45128 Essen  
Tel +49 (201) 816 2148  
Fax +49 (201) 816 3621  
Email rolf.poschmann  
@siemens.com

#### Nürnberg

Siemens AG  
Mr. Fiedler  
Von-der-Tann-Str. 30  
90439 Nürnberg  
Tel +49 (911) 654 3413  
Fax +49 (911) 654 3596  
Email wolfram.fiedler  
@siemens.com

#### Osnabrück

Siemens AG  
Mr. Poschmann  
Kruppstr. 16  
45128 Essen  
Tel +49 (201) 816 2148  
Fax +49 (201) 816 3621  
Email rolf.poschmann  
@siemens.com

#### Regensburg

Siemens AG  
Mr. Fiedler  
Von-der-Tann-Str. 30  
90439 Nürnberg  
Tel +49 (911) 654 3413  
Fax +49 (911) 654 3596  
Email wolfram.fiedler  
@siemens.com

#### Rostock

Siemens AG  
Mr. Kröger  
Universitätsallee 16  
28359 Bremen  
Tel +49 (421) 364 2185  
Fax +49 (421) 364 2249  
Email helmut.kroeger  
@siemens.com

#### Saarbrücken

Siemens AG  
Mr. Wulle  
Dynamostr. 4  
68165 Mannheim  
Tel +49 (621) 465 2661  
Fax +49 (621) 465 2747  
Email thomas.wulle  
@siemens.com

#### Siegen

Siemens AG  
Mr. Schauenberg  
Franz-Geuer-Str. 10  
50823 Köln  
Tel +49 (221) 576 2536  
Fax +49 (221) 576 2921  
Email frank.schauenberg  
@siemens.com

#### Stuttgart

Siemens AG  
Mr. Röder  
Weissacher Str. 11  
70499 Stuttgart  
Tel +49 (711) 137 4059  
Fax +49 (711) 137 2070  
Email bernd.roeder  
@siemens.com

#### Trier

Siemens AG  
Mr. Wulle  
Dynamostr. 4  
68165 Mannheim  
Tel +49 (621) 465 2661  
Fax +49 (621) 465 2747  
Email thomas.wulle  
@siemens.com

#### Ulm

Siemens AG  
Mr. Röder  
Weissacher Str. 11  
70499 Stuttgart  
Tel +49 (711) 137 4059  
Fax +49 (711) 137 2070  
Email bernd.roeder  
@siemens.com

#### Weingarten

Siemens AG  
Mr. Röder  
Weissacher Str. 11  
70499 Stuttgart  
Tel +49 (711) 137 4059  
Fax +49 (711) 137 2070  
Email bernd.roeder  
@siemens.com

#### Wetzlar

Siemens AG  
Mr. Wulle  
Dynamostr. 4  
68165 Mannheim  
Tel +49 (621) 465 2661  
Fax +49 (621) 465 2747  
Email thomas.wulle  
@siemens.com

#### Würzburg

Siemens AG  
Mr. Fiedler  
Von-der-Tann-Str. 30  
90439 Nürnberg  
Tel +49 (911) 654 3413  
Fax +49 (911) 654 3596  
Email wolfram.fiedler  
@siemens.com

#### Wuppertal

Siemens AG  
Mr. Poschmann  
Kruppstr. 16  
45128 Essen  
Tel +49 (201) 816 2148  
Fax +49 (201) 816 3621  
Email rolf.poschmann  
@siemens.com

#### Great Britain

##### Manchester

Mr. Mackrory  
Sir William Siemens House/  
Princess Road  
Manchester M20 2UR  
Tel +44 (161) 446 6400  
Fax +44 (161) 446 6201  
Email john.mackrory  
@siemens.com

##### Greece

##### Athens

Siemens A.E.  
Mrs. Antoniou  
Artemidos 8  
15110 Amaroussio/Athen  
Tel +30 (1) 6864 534  
Fax +30 (1) 6864 299  
Email konstantina.antoniou  
@siemens.gr

##### Hungary

##### Budapest

Mr. Solt  
Gizella ut 51-57  
1143 Budapest  
Tel +36 (1) 471 1717  
Fax +36 (1) 471 1704  
Email attila.solt@siemens.hu

##### Ireland

##### Dublin

Siemens Ltd.  
Mr. Feeley  
Leeson Close  
2 Dublin  
Tel +353 (1) 216 2441  
Fax +353 (1) 216 2499  
Email martin.feeley  
@siemens.com

# Appendix

## SITOP contact persons

### in Europe (continued)

#### Italy

##### Bari

Mr. Gabellone  
Via Lucarelli, 10/b  
70124 Bari  
Tel +39 (080) 50 24068  
Email luca.gabellone@siemens.it

##### Bologna

Mr. Tosatti  
Via del Gomito, 1  
40127 Bologna  
Tel +39 (051) 63 84509  
Email davide.tosatti@siemens.it

##### Bologna

Mr. Forghieri  
Via del Gomito, 1  
40127 Bologna  
Tel +39 (051) 63 84608  
Email mauro.forghieri@siemens.it

##### Florence

Mr. Vessio  
Via Odorico da Pordenone, 26  
50127 Firenze  
Tel +39 (055) 3392 201  
Email domenico.vessio@siemens.it

##### Milan

Mr. Bischetti  
Viale Piero e Alberto Pirelli 10  
20126 Milano  
Tel +39 (02) 6676 3321  
Fax armando.bischetti@siemens.it

##### Milan

Mr. Berti  
Viale Piero e Alberto Pirelli 10  
20126 Milano  
Tel +39 (02) 6676 2836  
Email gualtiero.ber ti@siemens.it

##### Milan

Mr. Gaspari  
Viale Piero e Alberto Pirelli 10  
20126 Milano  
Tel +39 (02) 6676 2067  
Email adolfo.gaspari@siemens.it

##### Naples

Mr. De Sio  
Via G. Quagliariello, 35/E  
80146 Napoli  
Tel +39 (081) 5454237  
Email maurizio.desio@siemens.it

##### Padova

Mr. Millevoi  
Viale dell'Industria, 19  
35129 Padova  
Tel +39 (049) 8291336  
Email piero.millevoi@siemens.it

##### Padova

Mr. Maffioli  
Viale dell'Industria, 19  
35129 Padova  
Tel +39 (049) 8291359  
Email andrea.maffioli@siemens.it

##### Rome

Mr. D Innocenti  
Via Laurentina 455  
142 Roma  
Tel +39 (06) 59692 285  
Email dario.dinnocenti@siemens.it

#### Torino

Mr. Montoli  
Via Pio VII, 127  
10127 Torino  
Tel +39 (011) 6173 275  
Email daniele.montoli@siemens.it

#### Latvia

##### Riga

Siemens SIA  
Mr. Tumpelis  
Vilandes iela 3  
1010 Riga  
Tel +371 (701) 55 18  
Fax +371 (701) 55 01  
Email ugis.tumpelis@siemens.com

#### Lithuania

##### Vilnius

Siemens UAB  
Mr. Laurinaitis  
V. Kudirkos g.6  
2009 Vilnius  
Tel +370 (2) 39 1515  
Fax +370 (2) 39 1501  
Email rimas.laurinaitis@siemens.com

#### Luxembourg

##### Luxembourg

Siemens S.A.  
Mr. Koch  
20, rue des Peupliers  
2328 Luxembourg-Hamm  
Tel +352 (43) 8 43-403  
Fax +352 (43) 8 43-449  
Email edmond.koch@siemens.lu

#### Netherlands

##### The Hague

Siemens Nederland N.V.  
Mr. Nieuwstraten  
Prinses Beatrixlaan 800  
2595 BN The Hague  
Tel +31 70 333 32 74  
Fax +31 70 333 38 85  
Email anton.nieuwstraten@siemens.nl

#### Norway

##### Oslo

Mr. Otterstad  
Østre Aker vei 90  
0518 Oslo  
Tel +47 2263 4164  
Fax +47 2263 3390  
Email dag.otterstad@siemens.no

#### Poland

##### Gdansk Sales North

Siemens Sp.z o.o.  
Mr. Skicki  
ul. Batorego 28-32  
Gdansk Sales North  
Tel +48 (58) 785 8490  
Fax +48 (58) 785 8499  
Email andrzej.skicki@siemens.com

##### Katowice Sales South

Siemens Sp.z o.o.  
Mr. Mezydło  
ul. Dolnych Walow 7  
Katowice Sales South  
Tel +48 (32) 208 4130  
Fax +48 (32) 208 4139  
Email tomasz.mezydło@siemens.com

#### Poznan Sales West

Siemens Sp.z o.o.  
Mr. Kaysiewicz  
ul. Romana Maya 1  
Poznan Sales West  
Tel +48 (61) 650 2823  
Fax +48 (61) 650 2824  
Email maciej.kaysiewicz@siemens.com

#### Warsaw Sales East

Siemens Sp.z o.o.  
Mr. Zielinski  
ul. Zupnicza 11  
Warszawa Sales East  
Tel +48 (22) 870 9862  
Fax +48 (22) 870 9119  
Email andrzej.zielinski@siemens.pl

#### Warsaw

Siemens Sp.z o.o.  
Mr. Ciuk  
ul. Zupnicza 11  
3821 Warszawa  
Tel +48 (22) 870 9145  
Fax +48 (22) 870 9169  
Email andrzej.ciuk@siemens.com

#### Portugal

##### Amadora

Siemens S. A.  
Mr. Filipe  
Rua Irmãos de Siemens, 1  
2720093 Amadora  
Tel +351 (21) 417 8838  
Fax +351 (21) 417 8050  
Email sergio.filipe@lis1.siemens.pt

#### Romania

##### Bukarest

Siemens S.R.L.  
Mr. Razvan  
Calea Pleavei Nr. 139,  
Corp C, sector 6  
RO 77131 Bucuresti  
Tel +40 2120 77 469  
Fax +40 2120 77 462  
Email razvan.ioachim@siemens.com

#### Russia

##### Moscow

Mr. Iwanow  
Ul. Malaja Kaluzhskaja, 17/19  
117071 Moscow  
Tel +7 (095) 737 2492  
Fax +7 (095) 737 2483  
Email pawel.iwanow@siemens.com

#### Slovakia

##### Bratislava

Siemens s.r.o.  
Mr. Patoprsty  
Stromova 9  
83796 Bratislava  
Tel +421 (2) 5968-2426  
Fax +421 (2) 5968 5240  
Email radomir.patoprsty@siemens.sk

#### Slovenia

##### Ljubljana

Siemens d.o.o.  
Mr. Mlinsek  
Dunajska 22  
1511 Ljubljana  
Tel +386 (1) 4746-152  
Fax +386 (1) 4746-138  
Email matjaz.mlinsek@siemens.si

#### Spain

##### Madrid

Mr. Ramón Romero  
Ronda de Europa, 5  
Tres Cantos (Madrid)  
Tel +34 (91) 514 4761  
Fax +34 (91) 514 7019  
Email pssitop@ssa.siemens.es

#### Sweden

##### Stockholm

Siemens AB  
Mr. Naglitsch  
Johanneslundsvägen 12-14  
Upplands Väsby  
Tel +46 (8) 728 1872  
Fax +46 (8) 728 1290  
Email peter.naglitsch@siemens.se

#### Switzerland

##### Basel

Siemens Schweiz AG  
Mr. Gysin  
Viaduktstr. 40  
4051 Basel  
Tel +41 (0) 848 822 844  
Fax +41 (0) 848 822 876  
Email rudolf.gysin@siemens.com

##### Lausanne

Siemens Suisse SA  
Mr. Gysin  
Avenue des Baumettes 5  
1020 Renens  
Tel +41 (0) 848 822 844  
Fax +41 (0) 848 822 876  
Email rudolf.gysin@siemens.com

##### Zürich

Siemens Schweiz AG  
Mr. Gysin  
Freilagerstr. 40  
8047 Zürich  
Tel +41 (0) 848 822 844  
Fax +41 (0) 848 822 876  
Email rudolf.gysin@siemens.com

#### Turkey

##### Istanbul

Siemens Sanayi ve Ticaret A.S.,  
Istanbul  
Mrs. Ynan  
Yakacik Yolu No. 111  
81430 Kartal-Istanbul  
Tel +90 (216) 459 3706  
Fax +90 (216) 459 3079  
Email sevtap.inan@siemens.com.tr

### in Europe (continued)

#### Ukraine

**Kiew**  
Siemens AG  
Mr. Fadejew  
Uliiza Worowskovo 27  
252054 Kiew 54  
Tel +380 (44) 201-2461  
Fax +380 (44) 201-2466  
Email wladimir.fadejew@siemens.com

#### Yugoslavia

**Belgrade**  
Siemens d.o.o., Belgrad  
Mr. Rajic  
Knez Mihailova 30  
11000 Belgrad  
Tel +381 (11) 3070 184  
Fax +381 (11) 3070 050  
Email milan.rajic@siemens.com

### outside Europe

#### Africa

##### Algeria

**Algier**  
Siemens Algérie S.A.R.L.  
Mr. Rabah Chaoui  
29, rue des pins  
16035 Algier  
Tel +213 21 60 37 65  
Tel +213 21 60 72 07  
Fax +213 21 48 09 79  
Email rabah.chaoui@siemens.com

##### Cote d'Ivoire

**Abidjan**  
Semen  
Mr. Hellal  
Atelier Z.I. Vridi  
Rue des Petroliers  
15 B.P. 1062  
Abidjan 15, Semen  
Tel +225 21 27 16 75 (46 57)  
Fax +225 21 27 10 21  
Email philippehellal@aviso.ci

##### Egypt

**Cairo**  
Siemens Ltd.  
Mr. El-Bassyouni  
55 A & B, El Nakhil and  
El Aenab Street  
Cairo - Mohandessin, NME  
Tel +20 2 33 33 6 12  
Fax +20 2 33 33 6 07  
Email tamer.bassyouni@siemens.com

##### Samouha-Alexandria

Siemens Limites  
Mr. Lotfy  
27, Victor Emmanuel Street  
Samouha-Alexandria  
Tel +20 (3) 4251007  
Fax +20 (3) 4251009  
Email mina.lotfy@siemens.com

##### Kenya

**Nairobi**  
International Energy Technik Ltd.  
Mr. Pillay  
P.O. Box 46215  
Unit 90, The Alpha Centre  
Mombasa Road  
Nairobi  
Tel +254 2 35 1082  
Fax +254 2 35 0469  
Email rajesh.pillay@iet.co.ke

#### Morocco

**Casablanca**  
Siemens Marokko S.A.  
Immeuble Siemens  
Mr. Mostafa Bazokar  
km 1 Route de Rabat Aïn-Sebâa  
20250 Casablanca  
Tel +212 22 66 92 59 (92 28)  
Fax +212 22 34 01 51  
Email mostafa.bazokar@siemens.com

#### South Africa

**Johannesburg**  
Siemens SA  
Control and Instrumentation  
Siemens Park Midrand  
Mr. Venter  
300 Janadel Avenue  
Halfway House 1685  
Johannesburg - Südafrika  
Tel +27 (011) 652 36 88  
Fax +27 (011) 652 36 97  
Email stephen.venter@siemens.com

#### Tunesia

**Tuni**  
Faze Service  
Mr. Fantar  
Immeuble Nour El Bouhaira E. B.  
Rue du Lac Turkana  
Les Berges du Lac  
1053 Tuni  
Tel +216 71 964 266  
Fax +216 71 964 265  
Email afif.fantar@faze.com.tn

#### America

##### Argentina

**Buenos Aires**  
Siemens S.A.  
Mr. Abenante  
Calle 122 (ex Gral. Roca) 4785,  
Ruta 8, km 18 - Casilla de  
Correo 32  
RA-B1653 JXA San Martin  
Prov. de Buenos Aires  
Tel +54 11 4738 7341  
Fax +54 11 4738 7271  
Email matias.abenante@siemens.com

##### Brazil

**São Paulo**  
Siemens Ltd.  
Mr. Marchesan  
Rua Coronel Bento Bicudo,  
111 - Lapa  
05069 900 São Paulo - SP  
Tel +55 11 3833 4115  
Fax +55 11 3833 4183  
Email ricardo.marchesan@siemens.com

#### Canada

**Ontario**  
Siemens Canada Ltd.  
Mr. Udayan  
80 Walker Drive  
Brampton, ON L6T 4H6  
Tel +1 905 819 5800 (2470)  
Fax +1 905 819 5719  
Email udayan.pandya@siemens.com

#### Chile

**Santiago de Chile**  
Siemens SA Mercosur  
Mr. Gorenberg  
Alameda 194, p°3 - Santiago  
Santiago de Chile  
Tel +56 2 361 4283  
Fax +56 2 361 4293  
Email andres.gorenberg@siemens.com

#### Columbia

**Santafé de Bogotá D.C.**  
Siemens S.A.  
Mr. Mejia  
Carrera 65 No. 11-83  
Santafé de Bogotá D.C.  
Tel +57 (1) 4253 710  
Fax +57 (1) 2942 600  
Email jorge.mejia@siemens.com

#### Costa Rica

**San José**  
Siemens S.A. San José  
Mr. Blanco  
La Uruca  
Apartado: 10022-1000 S.J.  
San José, Costa Rica  
Tel +506 (287) 5251  
Fax +506 (287) 5295  
Email sergio.blanco@siemens.com.mx

#### El Salvador

**San Salvador**  
Mr. Callejas  
Antiguo Cuscatlán,  
Apartado 1525  
01 137 San Salvador  
Tel +503 278 3333  
Fax +503 278 3334  
Email victor.callejas@siemens.com

#### Guatemala

**Ciudad de Guatemala**  
Siemens S.A.  
Mr. Godoy  
2a. Calle 6-76, Zona 10  
Ciudad de Guatemala  
Tel +502 379 2333  
Fax +502 379 2318  
Email miguel.godoy@siemens.com

#### Mexico

**Colonial Industrial Vallejo**  
Siemens SA  
Mr. Quintana  
Poniente 116 No. 560  
02300 México, D.F.  
Tel +525 55 328 20 00 - 3330  
Fax +525 55 328 20 00 - 2097  
Email edgar.quintana@siemens.com

#### Colonial Industrial Vallejo

Siemens SA  
Mr. Sánchez  
Poniente 116 No. 560  
Colonial Industrial Vallejo  
Tel +52 (5) 328-2112  
Fax +52 (5) 328-2097  
Email gregorio.sanchez@siemens.com

#### Peru

**Lima**  
Siemens  
Mr. Balarezo  
Av. Domingo Orué 971, Surquillo  
Lima  
Tel +51 (1) 2150030 (4354)  
Fax +51 (1) 42 19 292  
Email jesus.balarezo@siemens.com

#### USA

**Norcross**  
Siemens SE&A  
Mr. Bronzel  
5300 Triangle Parkway  
30092-2538 Norcross, GA  
Tel +001 (770) 871 3946  
Fax +001 (770) 871 3996  
Email kai-uwe.bronzel@siemens.com

#### Venezuela

**Caracas**  
Siemens s.a.  
Mr. Cavada  
Av. Don Diego Disneros  
(1010-A-Aptdo. 3616) =Pf  
Urbanización, Los Ruices  
Caracas 1071  
Tel +58 (2) 203 8436  
Fax +58 (2) 203 8523  
Email jesus.cavada@siemens.com

# Appendix

## SITOP contact persons

### outside Europe (continued)

#### Asia

##### China

###### Beijing

Siemens Limited  
Mr. Shi  
7, Wangjing Zhonghuan Nanlu  
100015 Beijing  
Tel +86 (10) 6472 1888 (3374)  
Fax +86 (10) 6473 9213  
Email lin.shi@siemens.com

###### Beijing

Siemens Limited  
Mr. Deng  
7, Wangjing Zhonghuan Nanlu  
100015 Beijing  
Tel +86 (10) 6472 1888 (3903)  
Fax +86 (10) 6473 9213  
Email xu.deng@siemens.com

##### Hong Kong

Siemens Ltd.  
Mr. Lam  
58/F, Central Plaza,  
18 Harbour Road  
Wanchai, Hong Kong  
Tel +86 (852) 2583 3228  
Fax +86 (852) 2824 9196  
Email jacky.lam@siemens.com

##### India

###### Thane

Siemens Limited  
Mr. Karmile  
Kalwa Works, Thane Belapur  
Road  
400 601 Thane (Maharashtra)

##### Indonesia

###### Jakarta

P.T. Siemens Indonesia  
Mr. Ansori  
Jalan Jendral Ahmad Yani  
Kav. B 67-68  
Pulo Mas  
13210 Jakarta  
Tel +62 (21) 4729-348  
Fax +62 (21) 4729-300  
Email ato.ansori@siemens.com

##### Iran

###### Theran

Siemens Sherkate Sahami (Khas)

Mr. Jashni  
Avenue Ayatollah Taleghani 32  
15936 Theran  
Tel +9821 6142234  
Fax +9821 6460615  
Email yousef.jashni@siemens.com

##### Israel

###### Tel-Aviv

ARDAN  
Production & Industrial  
Control Ltd.  
Mr. Bauer  
32, Habanay Street  
Holon 58856  
Tel +972 (3) 6 50 70 00  
Fax +972 (3) 5 58 13 11  
Email bauer@ardan-pic.co.il

##### Japan

###### Shinagawa-ku, Tokyo

Siemens K.K.  
Mr. Ishida  
20-14, Higashi-Gotanda 3-  
chome  
141-8614 Shinagawa-ku, Tokyo  
Tel +81 (3) 5423 8594  
Fax +81 (3) 5423 8734  
Email toshikazu.ishida@siemens.com

##### Jordan

###### Amman

F.A. Kettaneh & Co.Ltd.  
Mr. Rami  
Al Quds Street, P.O. Box 485  
11118 Amman  
Tel +962 (6) 439 8642/7173  
Fax +962 (6) 439 2582  
Email al-naqa.rami@kettaneh.com.jo

##### Lebanon

###### Mar-Mikhael-Beirut

Kettaneh S.A.  
Mr. Markarian  
Nahr Street  
Mar-Mikhael- Beirut  
Tel 00961 1 444560/3  
Fax 00961 1 4446284  
Email avedis.markarian@kettaneh.com

##### Kazakhstan

###### Almaty

Siemens TOO  
Mr. Kokoulin  
20, Zharokov St.  
480008 Almaty  
Tel +73 272 597 828  
Fax +73 272 583 700  
Email andrej.kokoulin@siemens.com

##### Kuwait

###### Sharq

Siemens  
Mr. Chhabra  
Jaber Al-Mubarak Street, Block 4  
Sharq, Kuwait  
Tel 965 241 8888  
Fax 965 246 3222  
Email naukhez.arслан@siemens.com

##### Korea

###### Seoul

Siemens Limited  
Mr. Song  
726, Asia Building 10th floor  
Yeoksam-dong, Kangnam-gu  
135 925 Seoul  
Tel +82 (2) 3420 4897  
Fax +82 (2) 527 7785  
Email songss@siemens.com

##### Malaysia

###### Kuala Lumpur

Mrs. Leong  
11 section 16/11,  
Jalan Damansara  
46350 Petaling Jaya,  
Selangor Darul Ehsan  
Tel +60 (3) 7952 5363  
Fax +60 (3) 7955 2282  
Email therese.leong@siemens.com

##### Pakistan

###### Karachi

Siemens Pakistan  
Engineering Co. Ltd.  
Mr. Naukhez  
B-72, Estate Avenue, S.I.T.E.  
75700 Karachi  
Tel +92 (21) 2574 910 19-4387  
Fax +92 (21) 256 3563  
Email naukhez.arслан@siemens.com

##### Philippines

###### Makati City

Siemens Inc.  
Mr. Salud  
169 H.V. De la Costa Street,  
Salcedo Village  
1227 Makati City  
Tel +63 (2) 814 9678  
Fax +63 (2) 814 9894  
Email bernard.salud@siemens.com

##### Saudi Arabia

###### Jeddah

Siemens Ltd.  
Mr. Vhora  
Baladia/Binzager Street  
Jeddah 21412  
Tel +966 (2) 661-4444 (2069)  
Fax +966 (2) 661-4444 (1500)  
Email abdulhafiz.vhora@siemens.com

##### Thailand

###### Bangkok

Siemens  
Mr. Somchai  
2922/283 New Petchburi Road,  
Bangkapi, Huay Kwang  
10310 Bangkok  
Tel +66 2715 4850  
Fax +66 2715 4841  
Email somchai@siemens.com

##### Taiwan

###### Taipei

Siemens  
Mr. Gu  
3, Yuan Qu Street,  
Nan Gang District  
115 Taipei  
Tel +886 (2) 2652 8888  
Fax +886 (2) 2652 8948  
Email ginfu.gu@siemens.com

##### Uzbekistan

###### Taschkent

Siemens AG  
Mr. Dobrev  
K. Yarmatov Str. 6  
Taschkent  
Tel +998 (71) 120 6403  
Fax +998 (71) 120 6402  
Email evgeniy.dobrev@siemens.com

##### Vietnam

###### Hanoi

Siemens AG  
Mr. Phuong  
239 Xuan Thuy Road,  
Cau Giay District  
Hanoi  
Tel +84 (4) 8334 400  
Fax +84 (4) 8334 371  
Email nguyen-ngoc.phuong@siemens.com

##### Australia

###### Bayswater Victoria

Siemens Limited  
Mr. Avellino  
885 Mountain Highway  
3153 Bayswater Victoria  
Tel +61 3 9721 7592  
Fax +61 3 9721 7630  
Email mark.avellino@siemens.com

Further information on contact person's addresses can be found in the Internet under <http://www.siemens.com/automation/partner>

# Appendix

## Siemens contacts worldwide



At

[www.siemens.com/automation/partner](http://www.siemens.com/automation/partner)

you can find details of Siemens contact partners worldwide responsible for particular technologies.

You can obtain in most cases a contact partner for

- Technical Support,
- Spare parts/repairs,
- Service,
- Training,
- Sales or
- Consultation/engineering.

You start by selecting a

- Country,
- Product or
- Sector.

By further specifying the remaining criteria you will find exactly the right contact partner with his/her respective expertise.

# Appendix Service & Support

## Information and Ordering in the Internet and on CD-ROM

### A&D in the WWW



A detailed knowledge of the range of products and services available is essential when planning and configuring automation systems. It goes without saying that this information must always be fully up-to-date.

The Siemens Automation and Drives Group (A&D) has therefore built up a comprehensive range of information in the World Wide Web, which offers quick and easy access to all data required.

Under the address

<http://www.siemens.com/automation>

you will find everything you need to know about products, systems and services.

### Product Selection Using the Interactive Catalog



Detailed information together with convenient interactive functions:

The interactive catalog CA 01 covers more than 80,000 products and thus provides a full summary of the Siemens Automation and Drives product base.

Here you will find everything that you need to solve tasks in the fields of automation, switchgear, installation and drives.

All information is linked into a user interface which is easy to work with and intuitive.

After selecting the product of your choice you can order at the press of a button, by fax or by online link.

Information on the interactive catalog CA 01 can be found in the Internet under

<http://www.siemens.com/automation/ca01>

or on CD-ROM or DVD.

### Easy Shopping with the A&D Mall



The A&D Mall is the virtual department store of Siemens AG in the Internet. Here you have access to a huge range of products presented in electronic catalogs in an informative and attractive way.

Data transfer via EDIFACT allows the whole procedure from selection through ordering to tracking of the order to be carried out online via the Internet.

Numerous functions are available to support you.

For example, powerful search functions make it easy to find the required products, which can be immediately checked for availability. Customer-specific discounts and preparation of quotes can be carried out online as well as order tracking and tracing.

Please visit the A&D Mall on the Internet under:

<http://www.siemens.com/automation/mall>

## Order No. index

Type	Page	Type	Page
<b>5SY4</b>		<b>6EP1</b>	
5SY4...	14/16	6EP1 935-6MF01	9/18, 15/12
<b>6EP1</b>		6EP1 961-2BA00	8/4, 15/9
6EP1 311-1SH02	13/2, 15/15	6EP1 961-3BA00	8/2, 15/9
6EP1 311-1SH12	13/2, 15/15	6EP1 961-3BA10	8/2, 15/9
6EP1 321-1SH02	13/4, 15/15	6EP1 961-3BA20	8/2, 15/9
6EP1 322-1SH02	13/4, 15/15	6EP1 971-1AA01	8/6, 15/10
6EP1 331-1SH02	13/8, 15/15	6EP1 971-2BA00	8/6, 15/10
6EP1 331-1SL11	2/3, 15/2	<b>6ES7</b>	
6EP1 331-2BA00	2/2, 15/2	6ES7 305-1BA80-0AA0	2/3, 15/3
6EP1 331-2BA10	2/2, 15/2	6ES7 307-1KA01-0AA	5/3, 15/5
6EP1 332-1SH12	3/2, 15/3	6ES7 307-1BA00-0AA0	2/3, 15/2
6EP1 332-1SH22	3/2, 15/3	6ES7 307-1EA00-0AA0	4/3, 15/3
6EP1 332-1SH31	3/2, 15/3	6ES7 307-1EA80-0AA0	4/3, 15/3
6EP1 332-1SH42	13/8, 15/15	<b>8AW1</b>	
6EP1 332-1SH51	13/8, 15/15	8AW1 011...	14/17
6EP1 333-1AL12	4/3, 15/4		
6EP1 333-1SL11	4/3, 15/3		
6EP1 333-2AA00	4/2, 14/18, 15/4		
6EP1 333-2BA00	4/2, 14/18, 15/4		
6EP1 333-3BA00	4/2, 7/2, 14/19, 15/4		
6EP1 334-1AL12	5/3, 15/4		
6EP1 334-1SH01	5/3, 15/5		
6EP1 334-1SL12	5/3, 15/5		
6EP1 334-2AA00	5/2, 14/18, 15/5		
6EP1 334-2BA00	5/2, 14/18, 15/5		
6EP1 334-2CA00	5/3, 15/5		
6EP1 334-3BA00	5/2, 7/2, 14/19, 15/5		
6EP1 336-2BA00	6/3, 15/8		
6EP1 336-3BA00	6/2, 15/7		
6EP1 337-3BA00	6/2, 15/7		
6EP1 351-1SH02	13/6, 15/15		
6EP1 352-1SH02	13/6, 15/15		
6EP1 353-0AA00	10/2, 15/13		
6EP1 353-2BA00	10/2, 15/13		
6EP1 354-1AL01	11/2, 15/14		
6EP1 434-2BA00	7/6, 15/8		
6EP1 436-2BA00	7/6, 14/20, 15/8		
6EP1 436-3BA00	7/3, 14/21, 15/7		
6EP1 437-2BA00	7/7, 14/20, 15/8		
6EP1 437-2BA10	7/7, 15/8		
6EP1 437-3BA00	7/3, 14/21, 15/7		
6EP1 457-3BA00	10/2, 15/13		
6EP1 536-2AA00	6/3, 15/8		
6EP1 632-1AL01	11/2, 15/14		
6EP1 731-2BA00	2/2, 15/2		
6EP1 732-0AA00	2/3, 15/3		
6EP1 931-2DC21	9/7, 15/11		
6EP1 931-2DC31	9/7, 15/11		
6EP1 931-2DC41	9/7, 15/11		
6EP1 931-2EC21	9/9, 15/11		
6EP1 931-2EC31	9/9, 15/11		
6EP1 931-2EC41	9/9, 15/11		
6EP1 931-2FC01	9/13, 15/11		
6EP1 935-6MC01	9/14		
6EP1 935-6MD11	9/16, 15/12		
6EP1 935-6MD31	9/15, 15/12		
6EP1 935-6ME21	9/17, 15/12		

# Appendix

## Indexes

### Subject index

<b>A</b>		<b>O</b>	
A&D online services	16/8	Overview of product families	1/6
Alternative voltages	10/2	<b>P</b>	
AS interface power supplies	11/2	Parallel connection for redundant operation and performance enhancement	14/12
<b>B</b>		Planning aids	14/11
Battery charging	14/15	Possible system disturbances and causes	14/9
Battery module 1.2 Ah	9/14	Power supplies, single-phase	2/2, 3/2
Battery module 12 Ah	9/18	Power supplies, single- and two-phase	4/2, 5/2, 6/2
Battery module 2.5 Ah	9/15	Power supplies, three-phase	7/2
Battery module 3.2 Ah	9/16	<b>S</b>	
Battery module 7 Ah	9/17	Selection guide	1/9
<b>C</b>		Series connection to increase the voltage	14/14
Conditions of sale and delivery	16/14	SITOP modular buffer module	8/2
Contact persons	16/2	SITOP modular redundancy module	8/2
<b>D</b>		SITOP modular signalling module	8/2
DC UPS module 15 A	9/3	SITOP select	8/4
DC UPS module 40 A	9/11	Specification sheet for customized power supplies	12/3
DC UPS module 6 A	9/3	Stabilized DC power supplies	14/2
DC UPS software	9/2	<b>T</b>	
Dimension drawings	section 15	Totally Integrated Automation – innovations for more productivity	1/4
<b>F</b>		<b>U</b>	
Fusing of the output circuit, selectivity	14/15	Uninterruptible power supplies	9/2
<b>L</b>			
Line-side connection	14/5		
LOGO!Power	13/2		
<b>M</b>			
Mains specifications	14/5		
Mounting	14/10		
Mounting areas and fixing options	14/10		

## Our Services for Every Phase of Your Project



### Configuration and Software Engineering



Support in configuring and developing with customer-oriented services from actual configuration to implementation of the automation project. <sup>1)</sup>

### Service On Site



With Service On Site we offer services for startup and maintenance, essential for ensuring system availability.

In Germany  
**0180 50 50 444** <sup>1)</sup>

In the face of harsh competition you need optimum conditions to keep ahead all the time: A strong starting position. A sophisticated strategy and team for the necessary support - in every phase. Service & Support from Siemens provides this support with a complete range of different services for automation and drives.

In every phase: from planning and startup to maintenance and upgrading.

Our specialists know when and where to act to keep the productivity and cost-effectiveness of your system running in top form.

### Online Support



The comprehensive information system available round the clock via Internet ranging from Product Support and Service & Support services to Support Tools in the Shop.

<http://www.siemens.com/automation/service&support>

### Repairs and Spare Parts



In the operating phase of a machine or automation system we provide a comprehensive repair and spare parts service ensuring the highest degree of operating safety and reliability.

In Germany  
**0180 50 50 448** <sup>1)</sup>

### Technical Support



Competent consulting in technical questions covering a wide range of customer-oriented services for all our products and systems.

**Tel.: +49 (0)180 50 50 222**  
**Fax: +49 (0)180 50 50 223**  
E-Mail:  
adsupport@siemens.com

### Optimization and Upgrading



To enhance productivity and save costs in your project we offer high-quality services in optimization and upgrading. <sup>1)</sup>

### Technical Consulting



Support in the planning and designing of your project from detailed actual-state analysis, target definition and consulting on product and system questions right to the creation of the automation solution. <sup>1)</sup>

<sup>1)</sup> For country-specific telephone numbers go to our Internet site at:  
<http://www.siemens.com/automation/service&support>

# Appendix Customer Support

## Knowledge Base on CD-ROM



For locations without online connections to the Internet there are excerpts of the free part of the information sources available on CD-ROM (Service & Support Knowledge Base). This CD-ROM contains all the latest product information at the time of production (FAQs, Downloads, Tips and Tricks, Updates) as well as general information on Service and Technical Support.

The CD-ROM also includes a full-text search and our Knowledge Manager for targeted searches for solutions. The CD-ROM will be updated every 4 months.

Just the same as our online offer in the Internet, the Service & Support Knowledge Base on CD comes complete in 5 languages (German, English, French, Italian, Spanish).

You can order the **Service & Support Knowledge Base CD** from your Siemens contact.

Order no. **6ZB5310-0EP30-0BA2**

Orders via the Internet (with Automation Value Card or credit card) at:

<http://www.siemens.com/automation/service&support>

in the Shop domain.

## Automation Value Card



### Small card - great support

The Automation Value Card is an integral component of the comprehensive service concept with which Siemens Automation and Drives will accompany you in each phase of your automation project.

It doesn't matter whether you want just specific services from our Technical Support or want to purchase high-quality Support Tools in our Online Shop, you can always pay with your Automation Value Card. No invoicing, transparent and safe. With your personal card number and associated PIN you can view the state of your account and all transactions at any time.

Services on card. This is how it's done.

Card number and PIN are on the back of the Automation Value Card. When delivered, the PIN is covered by a scratch field, guaranteeing that the full credit is on the card.

By entering the card number and PIN you have full access to the Service & Support services being offered. The charge for the services procured is debited from the credits on your Automation Value Card.

All the services offered are marked in currency-neutral credits, so you can use the Automation Value Card worldwide.

### Automation Value Card order numbers

Credits	Order no.
200	<b>6ES7 997-0BA00-0XA0</b>
500	<b>6ES7 997-0BB00-0XA0</b>
1000	<b>6ES7 997-0BC00-0XA0</b>
10000	<b>6ES7 997-0BG00-0XA0</b>

Detailed information on the services offered is available on our Internet site at:

<http://www.siemens.com/automation/service&support>

Service & Support à la Card: Examples

Technical Support	
"Priority"	Priority processing for urgent cases
"24 h"	Availability round the clock
„Extended“	Technical consulting for complex questions
Support Tools in the Support Shop	
"System Utilities"	Tools that can be used directly for configuration, analysis and testing
"Applications"	Complete topic solutions including ready-tested software
"Functions & Samples"	Adaptable blocks for accelerating your developments



## Conditions of sale and delivery

### Terms and Conditions of Sale and Delivery

By using this catalog you can acquire hardware and software products described therein from the Siemens AG subject to the following terms. Please note! The scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside of Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity.

#### *for customers with a seat or registered office in the Federal Republic of Germany*

The General Terms of Payment as well as the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry shall apply.

For software products, the General License Conditions for Software Products for Automation and Drives for Customers with Seat or registered Office in Germany shall apply.

#### *for customers with a seat or registered office outside of Germany*

The General Terms of Payment as well as the General Conditions for Supplies of Siemens, Automation and Drives for Customers with a Seat or registered Office outside of Germany shall apply.

For software products, the General License Conditions for Software Products for Automation and Drives for Customers with Seat or registered Office outside of Germany shall apply.

#### **General**

The prices are in € (Euro) ex works, exclusive packaging.

The sales tax (value added tax) is not included in the prices. It shall be debited separately at the respective rate according to the applicable legal regulations.

In addition to the prices of products which include silver and/or copper, surcharges may be calculated if the respective limits of the notes are exceeded.

Prices are subject to change without prior notice. We will debit the prices valid at the time of delivery.

The dimensions are in mm. Illustrations are not binding.

Insofar as there are no remarks on the corresponding pages, - especially with regard to data, dimensions and weights given - these are subject to change without prior notice.

Comprehensive Terms and Conditions of Sale and Delivery are available free of charge from your local Siemens business office under the following Order Nos.:

- 6ZB5310-0KR30-0BA0  
(for customers based in the Federal Republic of Germany)
- 6ZB5310-0KS53-0BA0  
(for customers based outside of the Federal Republic of Germany)

or download them from the Internet:

[www.siemens.com/automation/mall](http://www.siemens.com/automation/mall)

(Germany: A&D Mall Online-Help System)

### Export regulations

The products listed in this catalog / price list may be subject to European / German and/or US export regulations.

Therefore, any export requiring a license is subject to approval by the competent authorities.

According to current provisions, the following export regulations must be observed with respect to the products featured in this catalog / price list:

AL	Number of the <u>German Export List</u> . Products marked other than "N" require an export license. In the case of software products, the export designations of the relevant data medium must also be generally adhered to. Goods labeled with an " <u>AL not equal to N</u> " are subject to a European or German export authorization when being exported out of the EU.
ECCN	Export <u>Control Classification Number</u> . Products marked other than "N" are subject to a reexport license to specific countries. In the case of software products, the export designations of the relevant data medium must also be generally adhered to. Goods labeled with an " <u>ECCN not equal to N</u> " are subject to a US re-export authorization.

Even without a label or with an "AL: N" or "ECCN: N", authorization may be required due to the final destination and purpose for which the goods are to be used.

The deciding factors are the AL or ECCN export authorization indicated on order confirmations, delivery notes and invoices.

Errors excepted and subject to change without prior notice.

A&D/VuL/En 14.11.03

Siemens AG  
Automation and Drives  
Sales Power Supplies, System Cables  
Postfach 23 55  
90713 FÜRTH  
FEDERAL REPUBLIC OF GERMANY

Order No.  
**E86060-K2410-A101-A5-7600**  
KG 1004 27.0 BD 148 En/ 522194  
Printed in the Federal Republic of Germany

# Catalogs of the Automation and Drives Group (A&D)

Further information can be obtained from our  
branch offices listed in the appendix of this catalog

<b>Automation and Drives</b>	<i>Catalog</i>	<b>Low-Voltage Controls and Distribution</b>	<i>Catalog</i>
Interactive catalog on CD-ROM		Low-Voltage Switchgear – Controlgear for Industry	LV 10
• The Offline Mall of Automation and Drives	CA 01	Power Distribution – Products and Systems for Low-Voltage Power Distribution	LV 30
<b>Automation Systems for Machine Tools</b>		SIDAC-D reactors and SIDAC-F filters	LV 63
SINUMERIK & SIMODRIVE	NC 60	SIVACON 8PS Busbar Trunking Systems CD, BD01, BD2 up to 1250 A	LV 70
<b>Drive Systems</b>		Busbar trunking systems LDA/LDC	LV 71
<u>Variable-Speed Drives</u>		Busbar trunking systems LXA/LXC	LV 72
SINAMICS G130 Drive Converter Chassis Units	D 11	SETRON WL	NS WL
SINAMICS G150 Drive Converter Cabinet Units		<b>Motion Control System SIMOTION</b>	PM 10
SINAMICS G110 Inverter Chassis Units	D 11.1	<b>Process Instrumentation and Analytics</b>	
SINAMICS S120 Servo Control Drive System	D 21.2	Field Instruments for Process Automation	FI 01
SINAMICS S150 Drive Converter Cabinet Units	D 21.3	Measuring Instruments for Pressure, Differential Pressure, Flow, Level and Temperature, Positioners and Liquid Meters	
DC Motors	DA 12	<i>PDF: Indicators for panel mounting</i>	MP 12
SIMOREG DC MASTER 6RA70 Digital Chassis Converters	DA 21.1	SIREC Recorders and Accessories	MP 20
SIMOREG K 6RA22 Analog Chassis Converters	DA 21.2	SIPART, Controllers and Software	MP 31
SIMOREG DC MASTER 6RM70 Digital Converter Cabinet Units	DA 22	SIWAREX Weighing Systems	WT 01
SIMOVERT PM Modular Converter Systems	DA 45	Continuous Weighing and Process Protection	WT 02
SIEMOSYN Motors	DA 48	Gas Analysis Equipment for the Process Industry	PA 10
MICROMASTER 410/420/430/440 Inverters	DA 51.2	<i>PDF: Process Analytics, Components for the System Integration</i>	PA 11
MICROMASTER 411/COMBIMASTER 411	DA 51.3	SIPAN Liquid Analysis	PA 20
SIMOVERT MV Medium-Voltage Drives	DA 63	<b>SIMATIC Industrial Automation Systems</b>	
SIMOVERT MASTERDRIVES Vector Control	DA 65.10	SIMATIC PCS Process Control System	ST 45
SIMOVERT MASTERDRIVES Motion Control	DA 65.11	<i>PDF: SIMATIC S5/505 Automation Systems</i>	ST 50
Synchronous and asynchronous servomotors for SIMOVERT MASTERDRIVES	DA 65.3	Components for Totally Integrated Automation and Micro Automation	ST 70
SIMODRIVE 611 universal and POSMO	DA 65.4	SIMATIC PCS 7 Process Control System	ST PCS 7
<u>Low-Voltage Three-Phase-Motors</u>		<i>PDF: Add-ons for the SIMATIC PCS 7 Process Control System</i>	ST PCS 7.A
Squirrel-Cage Motors, Totally Enclosed, Fan-Cooled	M 11	SIMATIC Control Systems	ST DA
<u>Automation Systems for Machine Tools SIMODRIVE</u>	NC 60	<b>SIPOS Electric Actuators</b>	
• Main Spindle Motors		Electric Rotary, Linear and Part-turn Actuators	MP 35
• Feed Motors		Electric Rotary Actuators for Nuclear Plants	MP 35.1/2
• Converter Systems SIMODRIVE 611/POSMO		<b>Systems Engineering</b>	
<u>Drive and Control Components for Hoisting Equipment</u>	HE 1	Power supplies SITOP power	KT 10.1
<b>Electrical Installation Technology</b>		System cabling SIMATIC TOP connect	KT 10.2
<i>PDF: ALPHA Small Distribution Boards and Distribution Boards</i>	ET A1	<b>System Solutions</b>	
<i>PDF: ALPHA Side-by-Side Switchgear Cabinets</i>	ET A3	Applications and Products for Industry are part of the interactive catalog CA 01	
<i>PDF: ALPHA FIX Terminal Blocks</i>	ET A5	<b>TELEPERM M Process Control System</b>	
<i>PDF: BETA Modular Installation Devices</i>	ET B1	AS 235, AS 235H and AS 235K automation systems	PLT 111
<i>PDF: DELTA Switches and Outlets</i>	ET D1	<i>PDF: AS 488/TM automation systems</i>	PLT 112
<i>PDF: GAMMA Building Management Systems</i>	ET G1	Operating and monitoring with WinCC/TM	PLT 123
<b>Factory Automation Sensors</b>	FS 10	CS 275 bus system	PLT 130
<b>Human Machine Interface Systems SIMATIC HMI</b>	ST 80		
<b>Industrial Communication for Automation and Drives</b>	IK PI		

*PDF: These catalogs are only available as pdf files.*

The information provided in this catalog contains descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in terms of contract. Availability and technical specifications are subject to change without notice.

**Siemens AG**

Automation and Drives

Systems Engineering

Sales Power Supplies, System Cables

[www.siemens.com](http://www.siemens.com)

Order No.: E86060-K2410-A101-A5-7600