


## Open Type Star Delta Starters


Maximum 3 Phase Motor Current Amps	Motor Rating At 415V		Overload type (Additional)	Part Reference	Price Each
	KW	HP			
16	7.5	10	RF25	DYF9T*	180.00
22	11	15	RF25	DYF12T*	194.00
28	15	20	RF25	DYF16T*	205.00
35	18.5	25	RF25/RF95	DYF20T*	223.00
43	22	30	RF25/RF95	DYF25T*	241.00
50	25	34	RF25/RF95	DYF32T*	301.00
60	30	40	RF25/RF95	DYF38T*	332.00
85	45	60	RF95	DYF50T*	444.00
110	63	85	RF95	DYF65T*	457.00
140	80	110	RF95	DYF80T*	612.00
145	80	110	RF95	DYF95T*	651.00

For 3 Phase Motors – No Overload

- Part reference should be completed with coil voltage required.
- Standard voltages; 110, 240, 415VAC
- Other voltages available on request.
- Overload to be ordered separately.

**IMPORTANT NOTE:** The overload relays for Star Delta starters must be selected for adjustment at 0.58 x motor full load current.

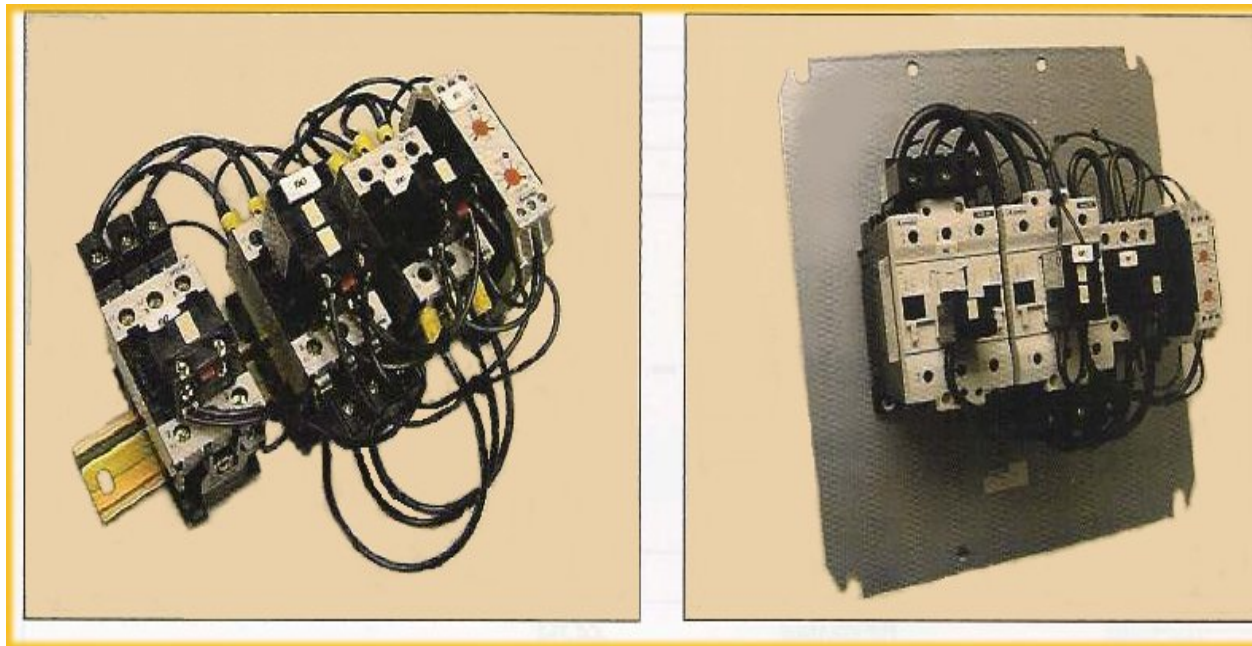

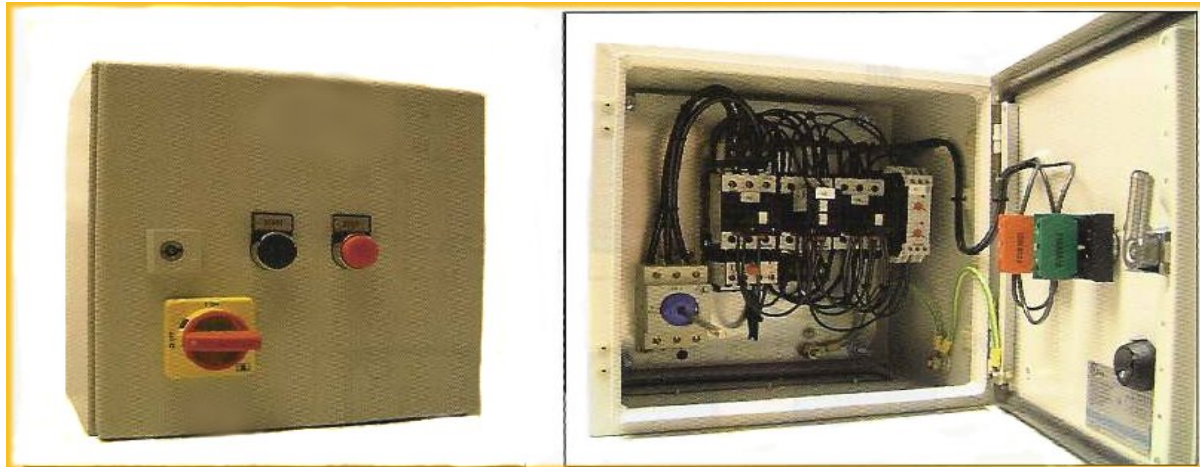

Metal Enclosure to IP65

All Control Circuit  
Wiring complete

Supplied complete with  
manual reset overload

Start/Stop Pushbutton  
Control

Complete with lockable  
3 Phase isolator  
(optional)

## Enclosed Star Delta Starters with Isolator

Maximum 3 phase Motor Current Amps	Motor Rating At 415V		Overload Range Amps	Part Reference	Price Each
	KW	Hp			
<b>For 3 Phase Motors – Complete with Overload</b>					
22	11	15	9-15	SDI11.415	420.00
28	15	20	14-23	SDI15.415	432.00
43	22	30	17-26	SDI22.415	478.00
60	30	40	28-42	SDI30.415	567.00
85	45	60	35-50	SDI45.415	707.00
95	55	75	46-65	SDI55.415	755.00
128	75	100	60-82	SDI75.415	913.00

Control circuit voltage 415VAC